

$BV_{CES}$	430±30V
$I_C$	20A
$V_{CE(sat)}$ (Typ.)	1.6V
$E_{AS}$	250mJ


### ●Features

- 1) Low Collector - Emitter Saturation Voltage
- 2) High Self-Clamped Inductive Switching Energy
- 3) Built in Gate-Emitter Protection Diode
- 4) Built in Gate-Emitter Resistance
- 5) Qualified to AEC-Q101
- 6) Pb - free Lead Plating ; RoHS Compliant


### ●Applications

- Ignition Coil Driver Circuits
- Solenoid Driver Circuits

### ●Outline

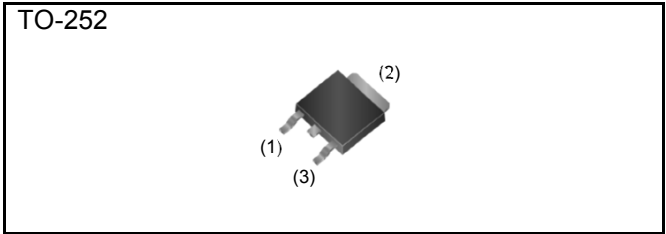

### ●Inner Circuit

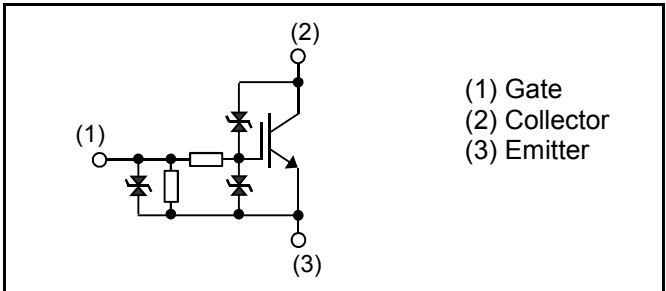

### ●Packaging Specifications

Type	Packaging	Taping
	Reel Size (mm)	330
	Tape Width (mm)	16
	Basic Ordering Unit (pcs)	2,500
	Packing Code	TL
	Marking	RGPR10BM40

### ●Absolute Maximum Ratings (at $T_C = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit	
Collector - Emitter Voltage	$V_{CES}$	460	V	
Emitter-Collector Voltage ( $V_{GE} = 0V$ )	$V_{EC}$	25	V	
Gate - Emitter Voltage	$V_{GE}$	±10	V	
Collector Current	$I_C$	20	A	
Avalanche Energy (Single Pulse)	$T_j = 25^\circ\text{C}$	$E_{AS}$	250	mJ
	$T_j = 150^\circ\text{C}$	$E_{AS}^{*2}$	150	mJ
Power Dissipation	$P_D$	107	W	
Operating Junction Temperature	$T_j$	-40 to +175	$^\circ\text{C}$	
Storage Temperature	$T_{stg}$	-55 to +175	$^\circ\text{C}$	

### ●Thermal Resistance

Parameter	Symbol	Values			Unit
		Min.	Typ.	Max.	
Thermal Resistance Junction - Case	$R_{\theta(j-c)}$	-	-	1.40	°C/W

### ●Electrical Characteristics (at $T_j = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Conditions	Values			Unit
			Min.	Typ.	Max.	
Collector - Emitter Breakdown Voltage	$BV_{CES}$	$I_C = 2\text{mA}, V_{GE} = 0\text{V}$ $T_j = 25^\circ\text{C}$	400	430	460	V
		$T_j = -40 \text{ to } 175^\circ\text{C}^{*2}$	395	-	465	V
Emitter - Collector Breakdown Voltage	$BV_{EC}$	$I_C = -10\text{mA}, V_{GE} = 0\text{V}$	25	35	-	V
Gate - Emitter Breakdown Voltage	$BV_{GES}$	$I_G = \pm 5\text{mA}, V_{CE} = 0\text{V}$	$\pm 12$	-	$\pm 17$	V
Collector Cut - off Current	$I_{CES}$	$V_{CE} = 300\text{V}, V_{GE} = 0\text{V}$ $T_j = 25^\circ\text{C}$	-	-	7	$\mu\text{A}$
		$T_j = 150^\circ\text{C}^{*2}$	-	-	100	$\mu\text{A}$
Gate - Emitter Leakage Current	$I_{GES}$	$V_{GE} = \pm 10\text{V}, V_{CE} = 0\text{V}$	$\pm 0.4$	$\pm 0.6$	$\pm 1.2$	mA
Gate - Emitter Threshold Voltage	$V_{GE(th)}$	$V_{CE} = 5\text{V}, I_C = 10\text{mA}$ $T_j = 25^\circ\text{C}$	1.3	1.7	2.1	V
		$T_j = 150^\circ\text{C}$	-	1.3	-	V
Collector - Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 10\text{A}, V_{GE} = 5\text{V}$ $T_j = 25^\circ\text{C}$	-	1.60	2.00	V
		$T_j = 150^\circ\text{C}$	-	1.80	-	V
Collector - Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 4\text{A}, V_{GE} = 4.5\text{V}$ $T_j = 25^\circ\text{C}$	-	1.17	1.50	V
		$T_j = 150^\circ\text{C}$	-	1.13	-	V

**●Electrical Characteristics** (at  $T_j = 25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Conditions	Values			Unit
			Min.	Typ.	Max.	
Collector - Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 10\text{A}, V_{GE} = 4\text{V}$	-	1.70	2.10	V
		$T_j = 25^\circ\text{C}$	-	1.90	-	V
Input Capacitance	$C_{ies}$	$V_{CE} = 10\text{V}$	-	1000	-	pF
Output Capacitance	$C_{oes}$	$V_{GE} = 0\text{V}$	-	175	-	
Reverse Transfer Capacitance	$C_{res}$	$f = 1\text{MHz}$	-	55	-	
Total Gate Charge	$Q_g$	$V_{CE} = 15\text{V}, I_C = 10\text{A}, V_{GE} = 5\text{V}$	-	14	-	nC
Turn - on Delay Time <sup>*1,*2</sup>	$t_{d(on)}$	$I_C = 8\text{A}, V_{CC} = 300\text{V}, V_{GE} = 5\text{V}, R_G = 100\Omega, L = 5\text{mH}, T_j = 25^\circ\text{C}$	0.09	0.17	0.50	$\mu\text{s}$
Rise Time <sup>*1,*2</sup>	$t_r$		0.10	0.18	0.50	
Turn - off Delay Time <sup>*1,*2</sup>	$t_{d(off)}$		0.8	1.3	4.0	
Fall Time <sup>*1,*2</sup>	$t_f$		1.4	2.4	6.0	
Turn - on Delay Time <sup>*1</sup>	$t_{d(on)}$	$I_C = 8\text{A}, V_{CC} = 300\text{V}, V_{GE} = 5\text{V}, R_G = 100\Omega, L = 5\text{mH}, T_j = 150^\circ\text{C}$	-	0.16	-	$\mu\text{s}$
Rise Time <sup>*1</sup>	$t_r$		-	0.23	-	
Turn - off Delay Time <sup>*1</sup>	$t_{d(off)}$		-	1.5	-	
Fall Time <sup>*1</sup>	$t_f$		-	3.9	-	
Avalanche Energy (Single Pulse)	$E_{AS}$	$L = 5\text{mH}, V_{GE} = 5\text{V}, V_{CC} = 30\text{V}, R_G = 1\text{k}\Omega, T_j = 25^\circ\text{C}$	250	-	-	mJ
		$T_j = 150^\circ\text{C}^{*2}$	150	-	-	mJ
Gate Series Resistance	$R_G$		70	100	130	$\Omega$
Gate - Emitter Resistance	$R_{GE}$		8	16	24	k $\Omega$

\*1) Assurance items according to our measurement definition (Fig.16)

\*2) Design assurance items

●Electrical Characteristic Curves

Fig.1 Typical Output Characteristics

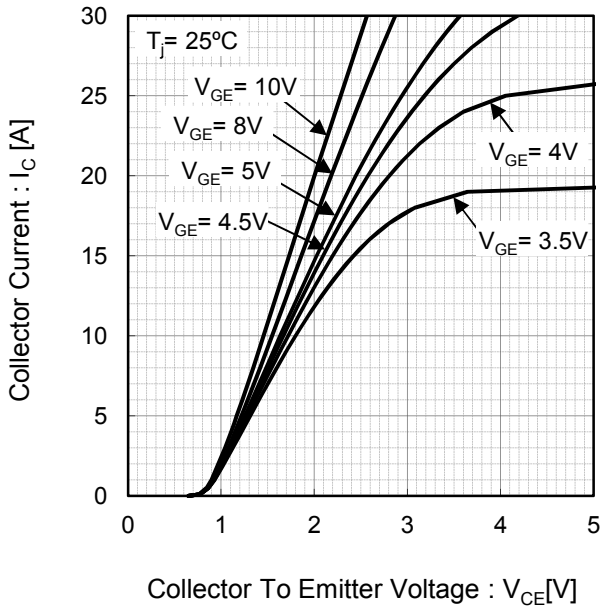


Fig.2 Typical Output Characteristics

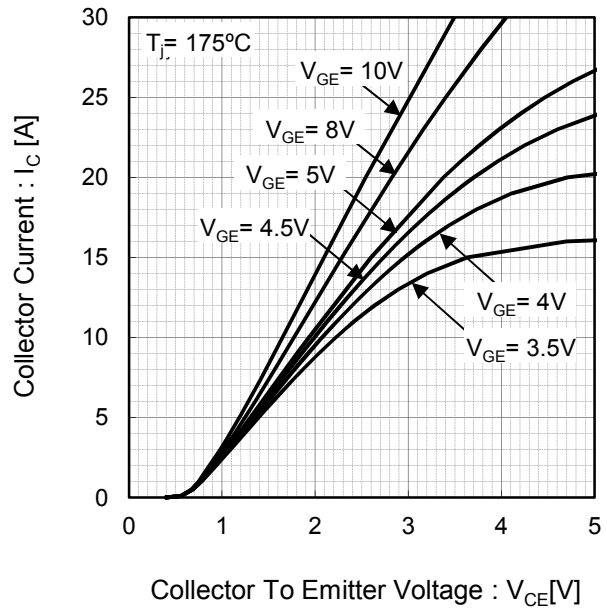


Fig.3 Typical Collector To Emitter Saturation Voltage vs. Junction Temperature


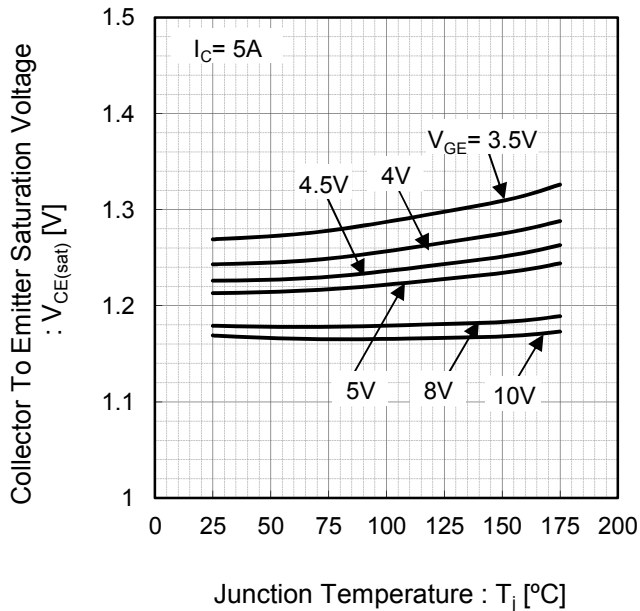


Fig.4 Typical Collector To Emitter Saturation Voltage vs. Junction Temperature

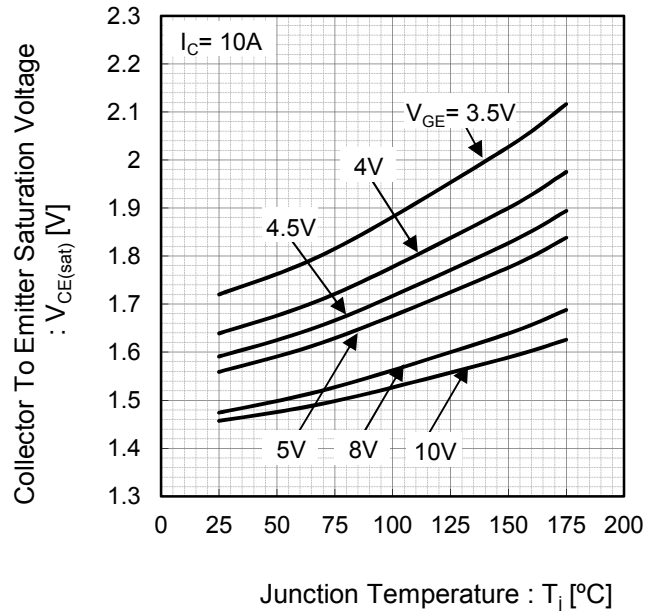

●Electrical Characteristic Curves

Fig.5 Typical Collector To Emitter Saturation Voltage vs. Junction Temperature

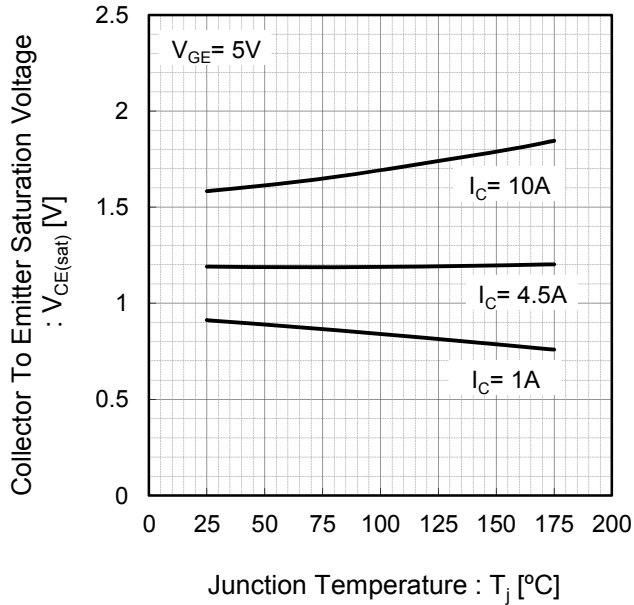


Fig.6 Typical Transfer Characteristics

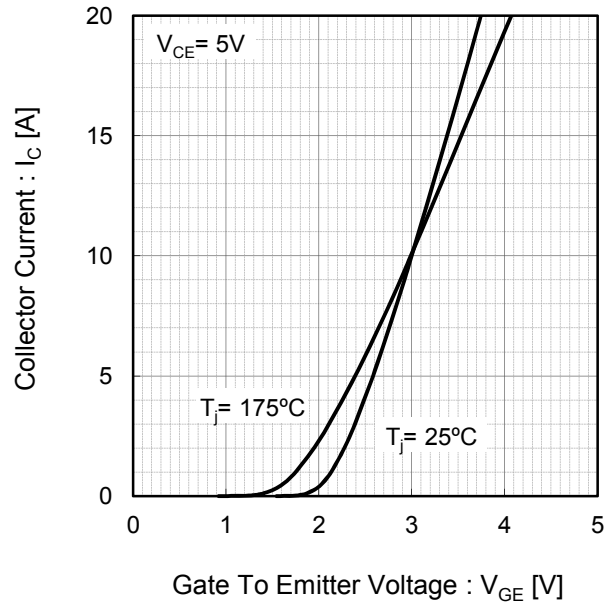


Fig.7 Typical Gate To Emitter Threshold Voltage vs. Junction Temperature


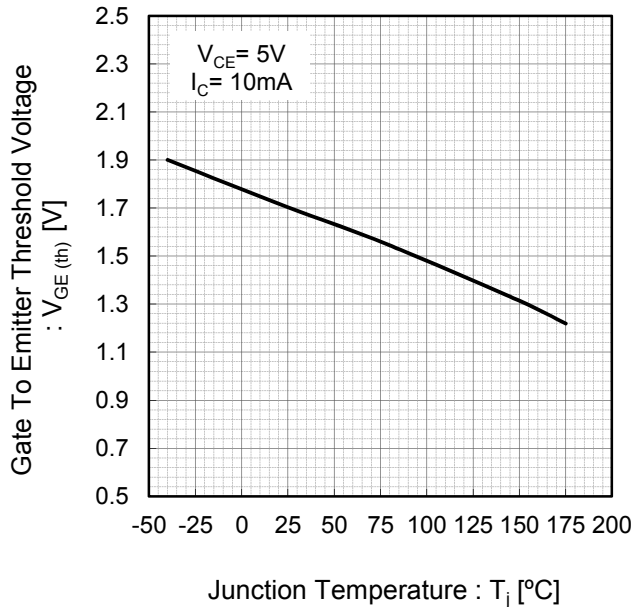


Fig.8 Typical Leakage Current vs. Junction Temperature

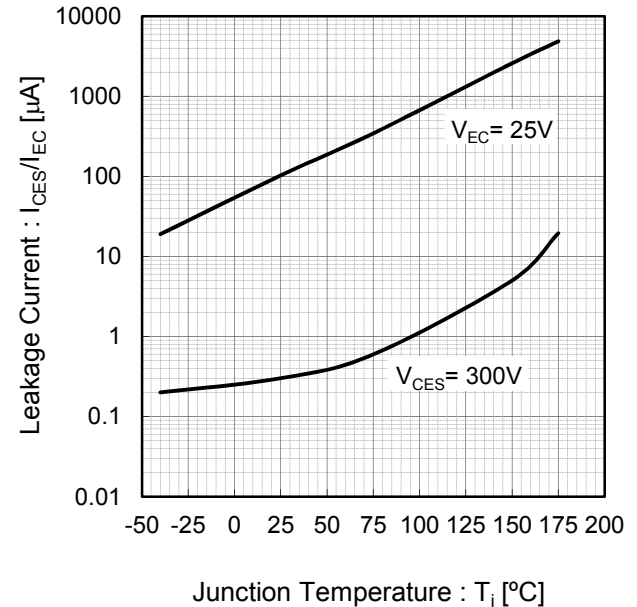

●Electrical Characteristic Curves

Fig.9 Typical Collector To Emitter Breakdown Voltage vs. Junction Temperature

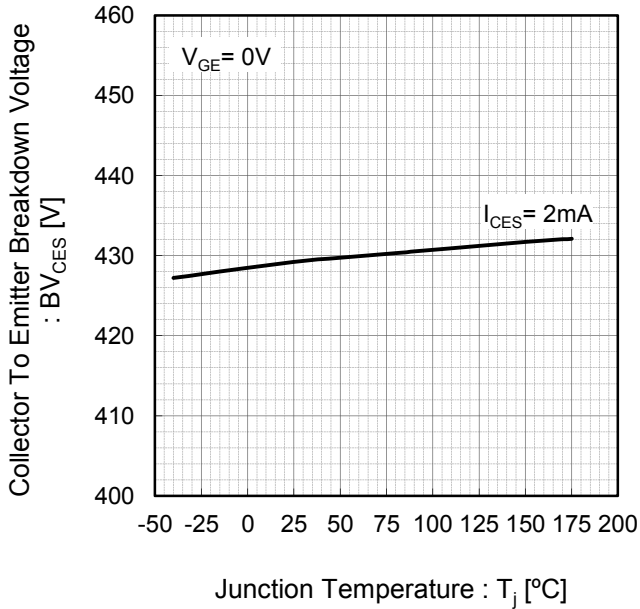


Fig.10 Typical Self Clamped Inductive Switching Current vs. Inductance

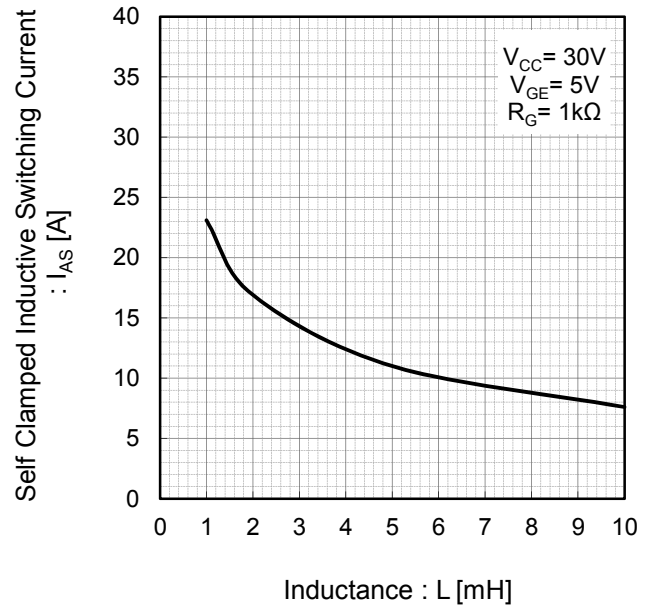


Fig.11 Typical Gate Charge


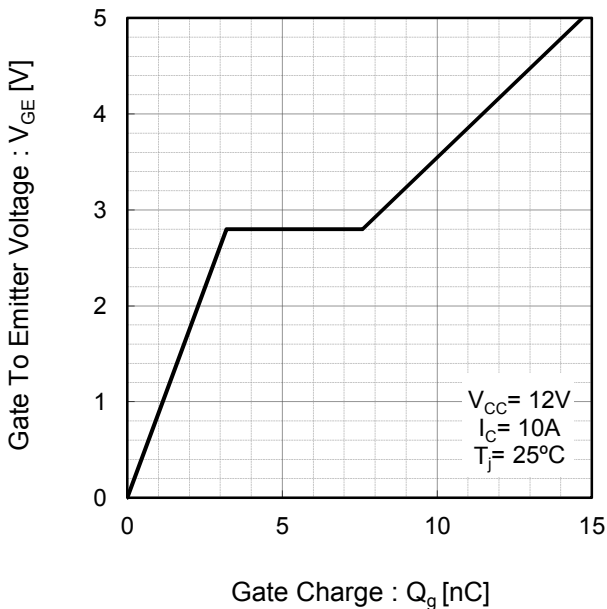


Fig.12 Typical Capacitance vs. Collector To Emitter Voltage

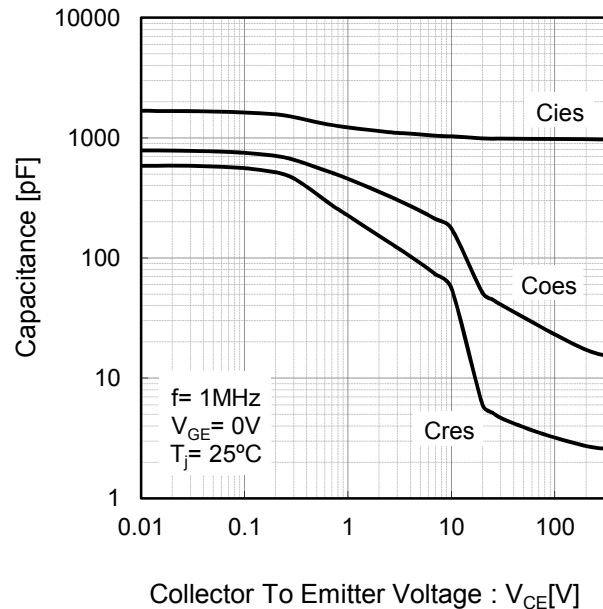

●Electrical Characteristic Curves

Fig.13 Typical Switching Time vs. Junction Temperature


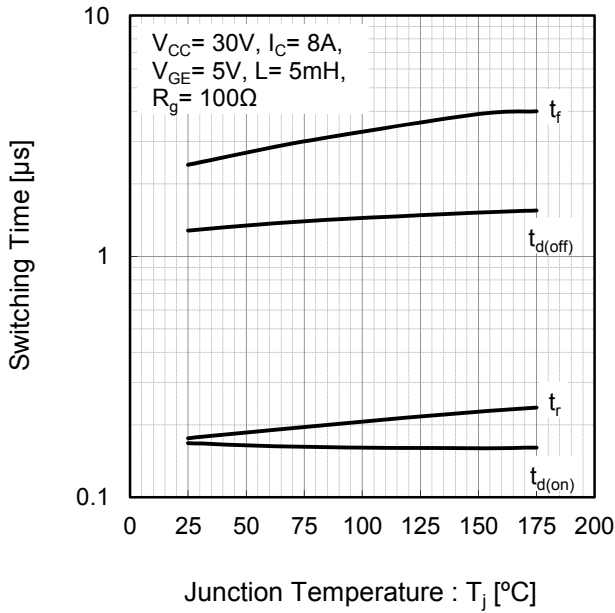


Fig.14 Transient Thermal Impedance

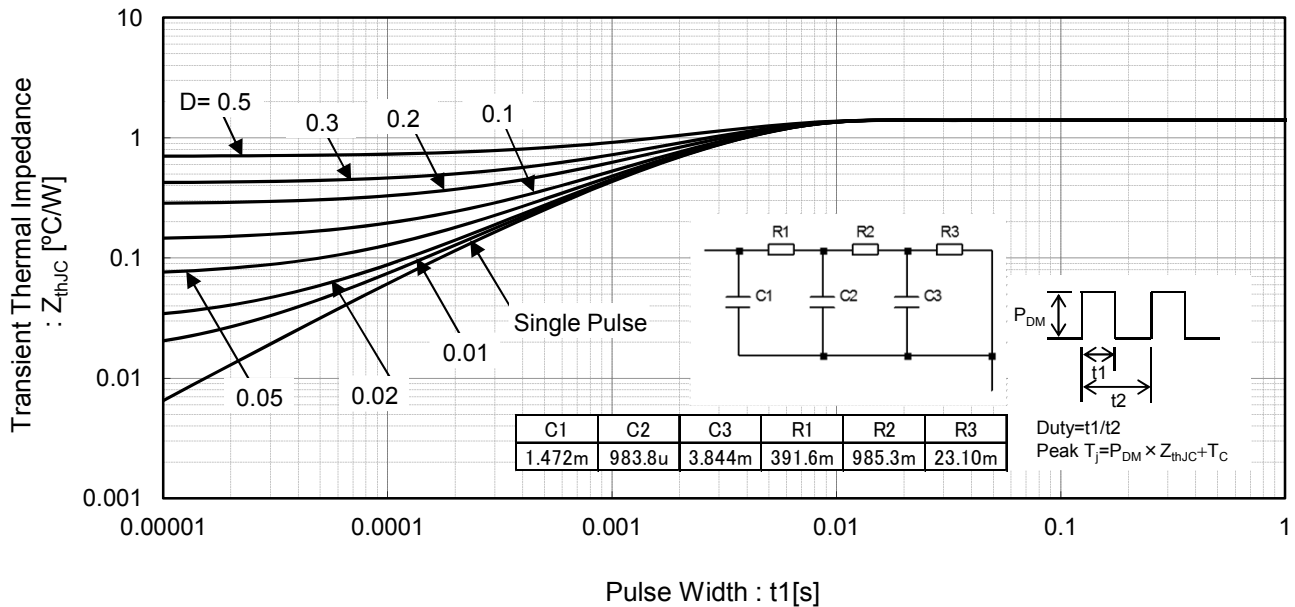

●Inductive Load Switching Circuit and Waveform

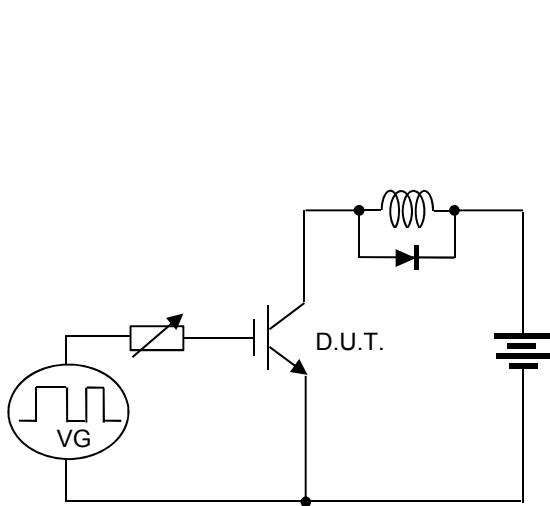


Fig.15 Inductive Load Switching Circuit

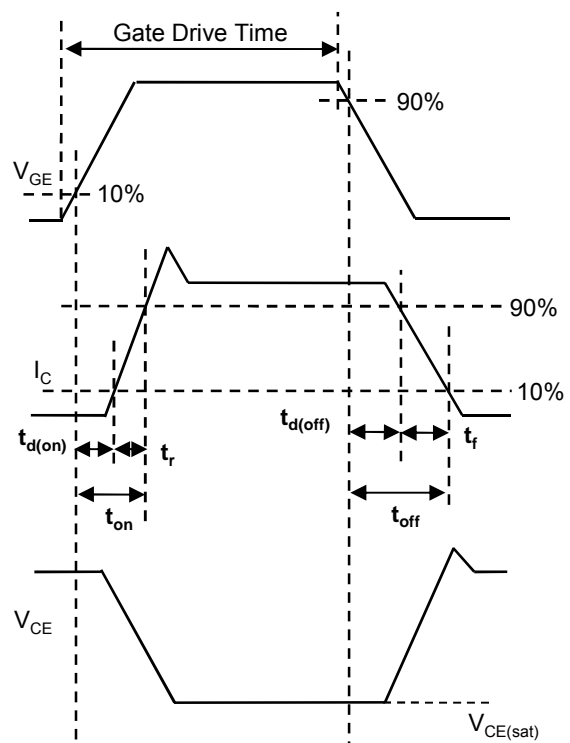


Fig.16 Inductive Load Switching Waveform

●Self Clamped Inductive Switching Circuit and Waveform

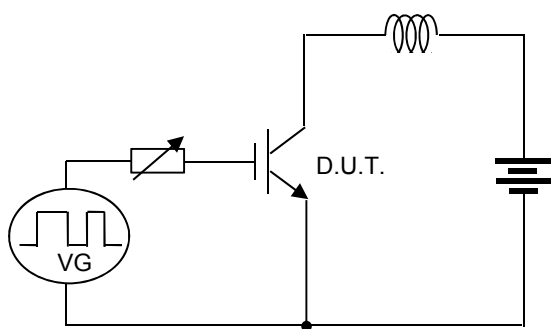


Fig.17 Self Clamped Inductive Switching Circuit

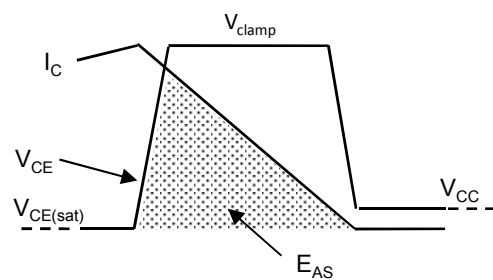


Fig.18 Self Clamped Inductive Switching Waveform



## Notes

- 1) The information contained herein is subject to change without notice.
- 2) Before you use our Products, please contact our sales representative and verify the latest specifications :
- 3) Although ROHM is continuously working to improve product reliability and quality, semiconductors can break down and malfunction due to various factors.  
Therefore, in order to prevent personal injury or fire arising from failure, please take safety measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have no responsibility for any damages arising out of the use of our Products beyond the rating specified by ROHM.
- 4) Examples of application circuits, circuit constants and any other information contained herein are provided only to illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.
- 5) The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM or any other parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use of such technical information.
- 6) The Products are intended for use in general electronic equipment (i.e. AV/OA devices, communication, consumer systems, gaming/entertainment sets) as well as the applications indicated in this document.
- 7) The Products specified in this document are not designed to be radiation tolerant.
- 8) For use of our Products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a ROHM representative : transportation equipment (i.e. cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, servers, solar cells, and power transmission systems.
- 9) Do not use our Products in applications requiring extremely high reliability, such as aerospace equipment, nuclear power control systems, and submarine repeaters.
- 10) ROHM shall have no responsibility for any damages or injury arising from non-compliance with the recommended usage conditions and specifications contained herein.
- 11) ROHM has used reasonable care to ensure the accuracy of the information contained in this document. However, ROHM does not warrant that such information is error-free, and ROHM shall have no responsibility for any damages arising from any inaccuracy or misprint of such information.
- 12) Please use the Products in accordance with any applicable environmental laws and regulations, such as the RoHS Directive. For more details, including RoHS compatibility, please contact a ROHM sales office. ROHM shall have no responsibility for any damages or losses resulting from non-compliance with any applicable laws or regulations.
- 13) When providing our Products and technologies contained in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the US Export Administration Regulations and the Foreign Exchange and Foreign Trade Act.
- 14) This document, in part or in whole, may not be reprinted or reproduced without prior consent of ROHM.



Thank you for your accessing to ROHM product informations.  
More detail product informations and catalogs are available, please contact us.

## ROHM Customer Support System

<http://www.rohm.com/contact/>