THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION OCT.,2016.
© COPYRIGHT 2016 By Tyco Electronics Japan G.K. ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D7	REVISED ECR-16-003344	25OCT2016	KF	HY

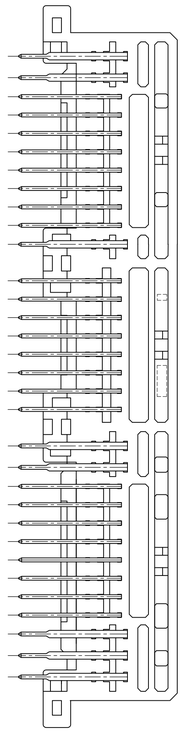

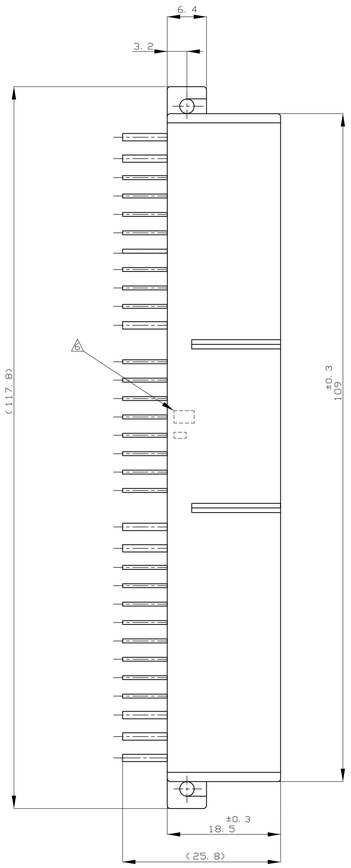

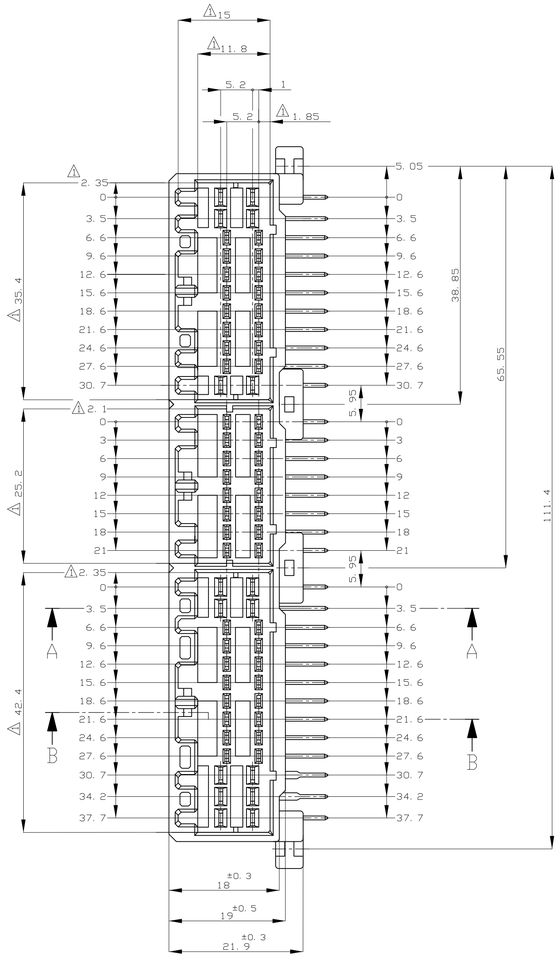

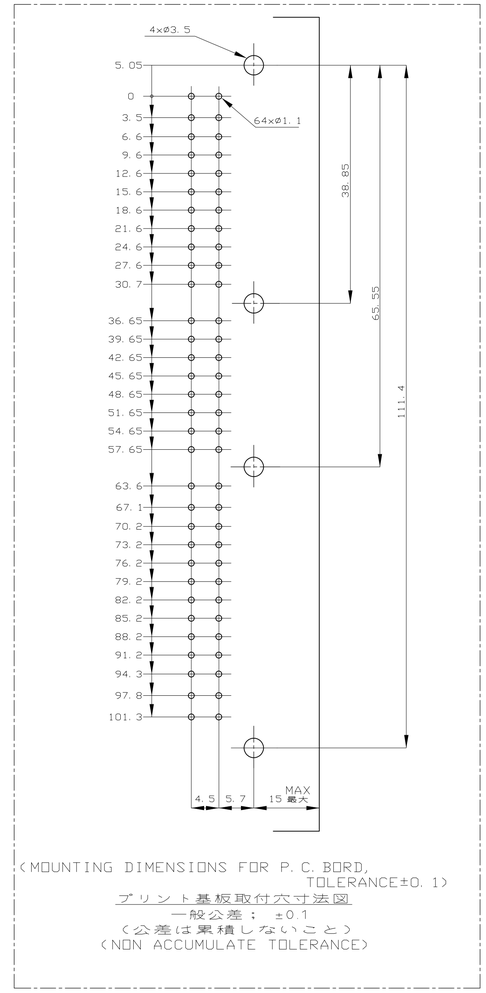

〈MOUNTING DIMENSIONS FOR P.C.BORD, TOLERANCE±0.1〉
プリント基板取付穴寸法図
一般公差：±0.1
〈公差は累積しないこと〉
〈NON ACCUMULATE TOLERANCE〉



A-A



B-B

NOTES

⚠1 MUST BE KEPT BETWEEN X AND 2
2 THE MATING PLUG HSG. PART NUMBER;
174516, 174515, 174514, 917992, 917989, 917981
3 RECOMMENDED MOUNTING SCREW; 3mmDIA, 6mmLENGTH〈MAX.〉
PAN HEAD, CLASS 2 TAPPING SCREW SPECIFIED IN JIS B1115, B1122
〈TIGHTENING TORQUE; 0.4N.m〈4Kg-cm〉MAX.〉
4 APPLICABLE PRODUCT. SPEC NO. 108-5280, 108-5342
⚠5 CIPCUIT NUMBER ; SEE FIG. 1
POWER CIPCUIT NO. ① ~ ⑯
SIGNAL CIRCUIT NO. ⑰ ~ ㊹
⚠6 MARKING FOR DISCERNMENT OF THE CONTACT FINISH

注記

⚠1 X 面から2mmの範囲で測定
2. 嵌合相手ハウジング型 174516, 174515, 174514, 917992, 917989, 917981
3. 推奨取付ねじ；JIS B1115, B1122 タッピンねじ，なべ2種
呼び径3，長さ6mm以下（締付トルク；0.4N.m(4Kg-cm)以下）
4. 適用製品規格番号；108-5280, 108-5342
⚠5 回路番号；FIG.1参照のこと
パワー回路；① ～ ⑯
シグナル回路；⑰ ～ ㊹
⚠6 コンタクト仕上識別マーク

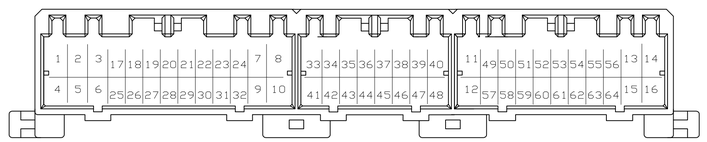

⚠5 FIG.1

MARKING マーキング	NO CONTACT CIRCUIT NO. ⚠2 欠番	FINISH OF CONTACT タブ仕上（本数）	POWER CIRCUIT NO. パワー回路	SIGNAL CIRCUIT NO. シグナル回路	HOUSING COLOR ハウジング色	P/N
			⚠3 CIRCUIT NO. OF GOLD PLATED CONTACT 金メッキ端子使用回路番号			
59		PRE-TIN × 54 / SELECTIVE TIN (MATTE) | SELECTIVE GOLD × 10	⑭, ⑯	㊸ ~ ㊹	GRAY 灰色	9-5178764-6
55		PRE-TIN × 60 / SELECTIVE TIN (MATTE) | SELECTIVE GOLD × 24		⑰-㉔ ㊸-㊵ ㊶-㊽	YELLOW 黄色	5-5178764-7
54		PRE-TIN × 62 / SELECTIVE TIN (MATTE) | SELECTIVE GOLD × 22		㉓ ㉔ ㊴-㊶ ㊽ ㊾	YELLOW 黄色	4-5178764-7
53		PRE-TIN × 12 / SELECTIVE TIN (MATTE) | SELECTIVE GOLD × 52	⑦~ ⑱	⑰ ~ ㊹	GRAY 灰色	3-5178764-6
52		PRE-TIN × 16 / SELECTIVE TIN (MATTE) | SELECTIVE GOLD × 48		⑰ ~ ㊹	GRAY 灰色	2-5178764-6
52		PRE-TIN × 16 / SELECTIVE TIN (MATTE) | SELECTIVE GOLD × 48		⑰ ~ ㊹	NATURAL 自然色	2-5178764-1
51		SELECTIVE TIN (MATTE) | SELECTIVE GOLD × 64	① ~ ⑯	⑰ ~ ㊹	GRAY 灰色	1-5178764-6
8		PRE-TIN × 52 / TIN-LEAD | SELECTIVE GOLD × 12		㉓-㉘ ㉙-㉞ ㉟-㊹	YELLOW 黄色	8-178764-7
7		PRE-TIN × 48 / TIN-LEAD | SELECTIVE GOLD × 16		㉓-㊵ ㊶-㊾	YELLOW 黄色	7-178764-7
6		PRE-TIN × 55 / TIN-LEAD | SELECTIVE GOLD × 9	⑭, ⑯	㊼ ~ ㊿	NATURAL 自然色	6-178764-1
5		PRE-TIN × 60 / TIN-LEAD | SELECTIVE GOLD × 24		⑰-㉔ ㊸-㊵ ㊶-㊾	YELLOW 黄色	5-178764-7
4		PRE-TIN × 62 / TIN-LEAD | SELECTIVE GOLD × 22		㉓ ㉔ ㊴-㊶ ㊽ ㊾	YELLOW 黄色	4-178764-7
3		PRE-TIN × 12 / TIN-LEAD | SELECTIVE GOLD × 52	⑦~ ⑱	⑰ ~ ㊹	YELLOW 黄色	3-178764-7
3		PRE-TIN × 12 / TIN-LEAD | SELECTIVE GOLD × 52	⑦~ ⑱	⑰ ~ ㊹	GRAY 灰色	3-178764-6
2		PRE-TIN × 16 / TIN-LEAD | SELECTIVE GOLD × 48		⑰ ~ ㊹	YELLOW 黄色	2-178764-7
2		PRE-TIN × 16 / TIN-LEAD | SELECTIVE GOLD × 48		⑰ ~ ㊹	GRAY 灰色	2-178764-6
2		PRE-TIN × 16 / TIN-LEAD | SELECTIVE GOLD × 48		⑰ ~ ㊹	NATURAL 自然色	2-178764-1
1		TIN-LEAD | SELECTIVE GOLD × 64	① ~ ⑯	⑰ ~ ㊹	YELLOW 黄色	1-178764-7
1		TIN-LEAD | SELECTIVE GOLD × 64	① ~ ⑯	⑰ ~ ㊹	GRAY 灰色	1-178764-6
0		PRE-TIN × 64			YELLOW 黄色	178764-7
A	⑬ ⑭	PRE-TIN × 62			NATURAL 自然色	178764-2
0		PRE-TIN × 64			NATURAL 自然色	178764-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位：粍 mm
TOLERANCES UNLESS OTHERWISE SPECIFIED 一般公差
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±

MATERIAL 材料: HOUSING ; PBT / CONTACT ; BRASS
FINISH 仕上: SEE TABLE

DWN	T.SHINOHARA	03AUG05
CHK	K.BETSUI	03AUG05
APVD	K.BETSUI	03AUG05

PRODUCT SPEC 製品規格: —
APPLICATION SPEC 取付適用規格: —
WEIGHT: 28.4 g

TE Connectivity

NAME 名称: 64POS CAP HOUSING ASSY .040/.070 SERIES HYBRID I/O CONN.

SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A1	00779	C-178764	—

CUSTOMER DRAWING | SCALE 尺度 2:1 | SHEET 1 OF 1 | REV D7