


PC card drilling dimensions(after plating)
(thickness 1.60±0.20mm)

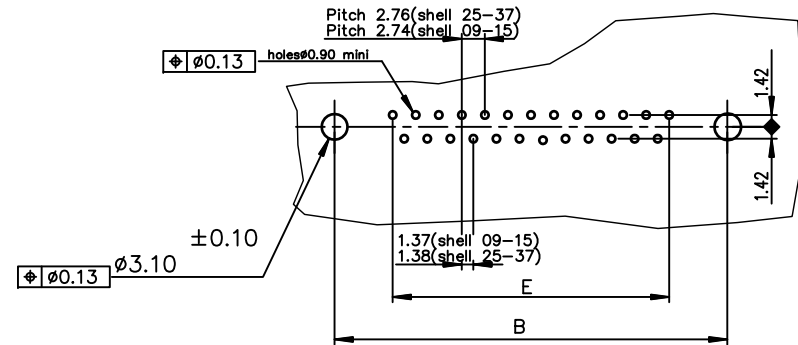

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S24A.PL00LF
15	39.14	33.32	25.18	24.54	19.18	D15S24A.PL00LF
25	53.03	47.04	39.12	38.25	33.12	D25S24A.PL00LF
37	69.32	63.50	55.68	54.71	49.68	D37S24A.PL00LF

Plating: 4 --> flash AU
Plating: 6 --> 0.76µ AU

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

Notes:

1) The nut can protrude above the surface of insulator but maintaining the footprint dimension 6.0±0.15 mm.

mat'l. code		surface		tolerance		projection		product family	
-		ISO 1302 ✓		ISO 406 ISO 1101				D-SUB	
Ltr		ecn no		dr		date		title	
E		ELX-I-21256		AB		2015/07/14		FEMALE CONNECTOR DELTA-D STRAIGHT - SOLDER TYPE FOR 1.6mm	
						angles		MM	
						linear		scale 2:1	
						0±2'			
				dr		Joubert		1996/09/10	
				enr		Alias Babu		2015/07/14	
				chr		Mithun Paul		2015/07/14	
				app		Biju K Paul		2015/07/14	
sheet index		revision sheet		E				FCJ	
		1						dwg no sheet 1 of 1 size	
								C01-8646-0491 A3	
								type Product Customer Drawing	