

Application

Commercial Grade

Series

FG26

Dimensions

L 5.5mm Max.
 W 6mm Max.
 T 3.5mm Max.
 F 5mm +/-1mm
 d 0.5mm +0.1,-0.03mm
 ℓ 7mm +/-2mm

Temperature Characteristic

-55 to 125°C 0+/-30ppm/°C

Rated Voltage

630Vdc

Capacitance

2.7nF

Capacitance Tolerance

+/-5%

Q Factor


1000 Min.

Insulation Resistance


10000Mohm Min.

AEC-Q200


No

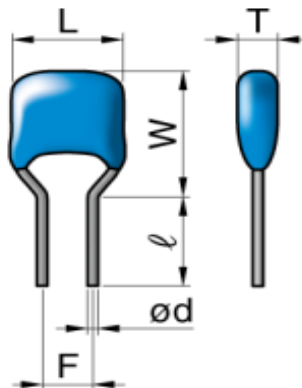


|Z| vs. Freq. Characteristic

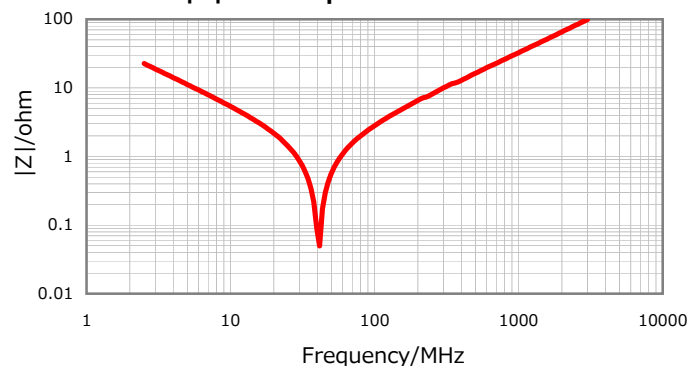

DC Bias Characteristic

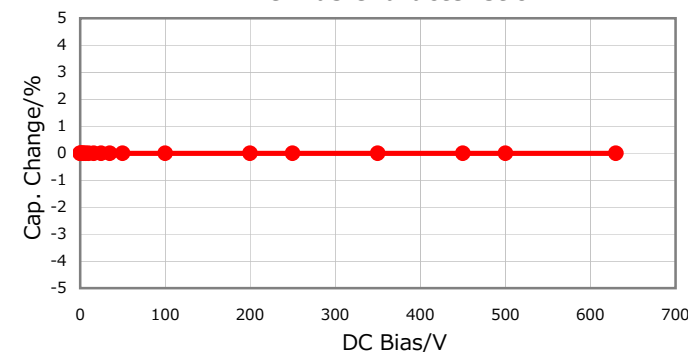

Cap. vs. Freq. Characteristic

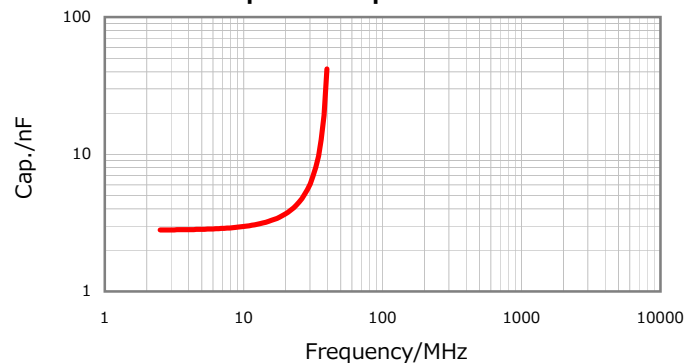

Temperature Characteristics

