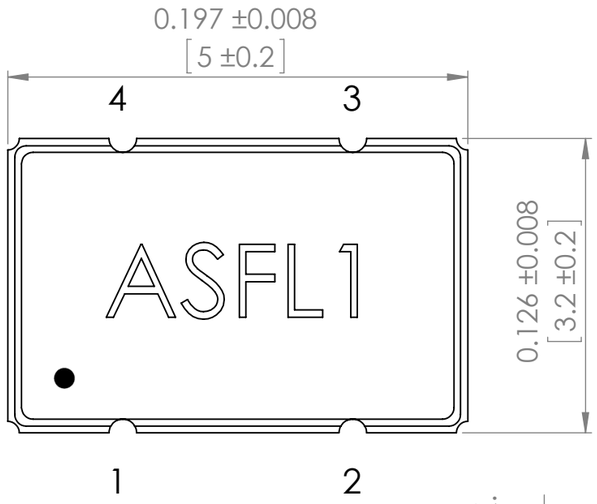

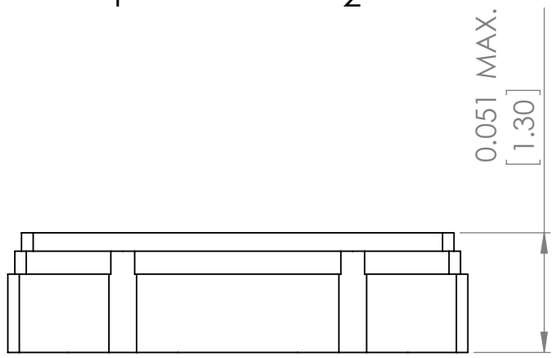

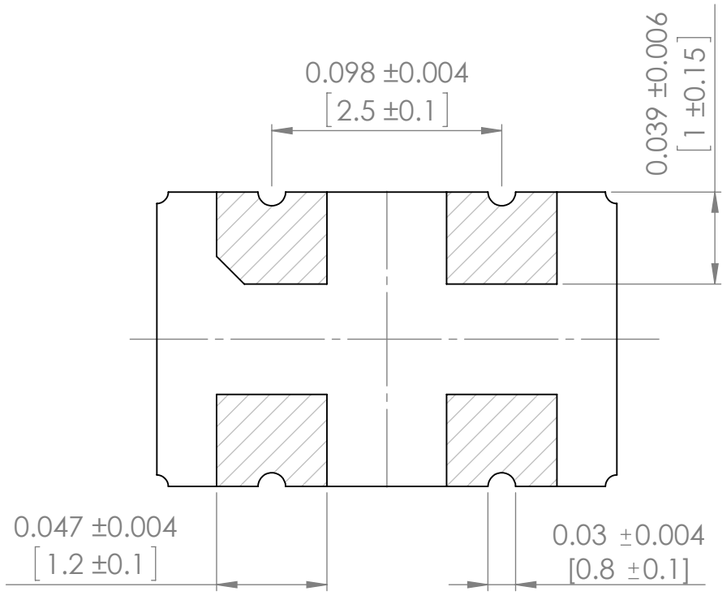

Bottom view

Recommended Land Pattern

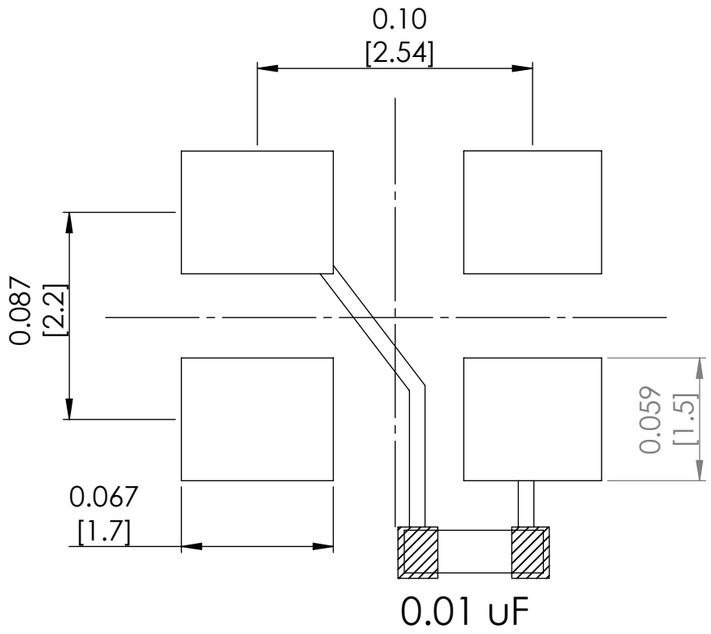

PIN	FUNCTION
1	Tri-state
2	GND
3	Output
4	VDD

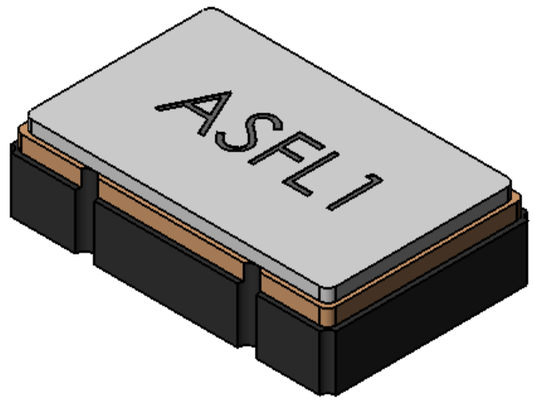

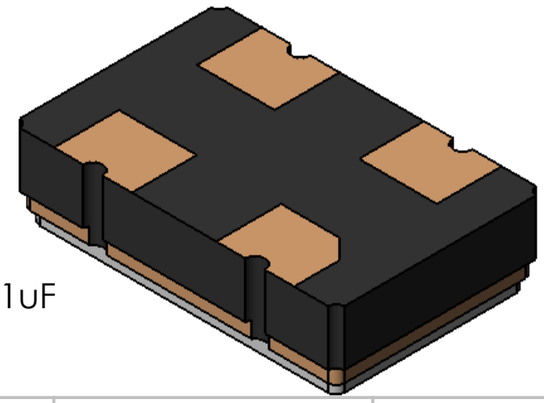

Note: : It is recommended to use an approximately 0.01uF bypass capacitor between PIN 2 and 4.

TOP PACKAGE MARKING IS FOR ILLUSTRATION PURPOSES ONLY

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCH(MM) SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBUR AND BREAK SHARP EDGES	
	NAME	SIGNATURE	DATE			
DRAWN	SAAZVAT					
CHK'D	XXXXXX					
APPV'D						
MFG						
Q.A				MATERIAL:		
				WEIGHT:		

DO NOT SCALE DRAWING — REVISION -

ABRACON CORPORATION

30332 Esperanza, Rancho Santa margarita, California 92688

TITLE: OSCILLATOR

DWG NO. ASFL1 — A3

SCALE:15:1 — SHEET 1 OF 1