


COIL: @ +25 °C
 RESISTANCE 27 OHMS ± 10%
 NOMINAL VOLTAGE 5.0 VDC
 MUST OPERATE 2.7 VDC
 MUST RELEASE .29 VDC

ENVIRONMENT:
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: _____

CUSTOMER DATA SHEET

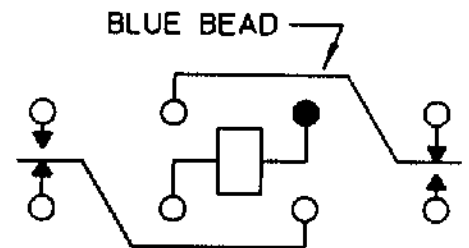

CONTACT RATING: LOW LEVEL TO
5 AMPS 28 VDC RESISTIVE
100,000 OPERATIONS MIN.

DR. R.B. 5/3/95 CK. 5/3/95


**COMMUNICATIONS
INSTRUMENTS, INC.**

CUST. C. I. I. STD.
 CUST. NO. _____

TYPE HFW5A RELAY

HFW5A1201L00