
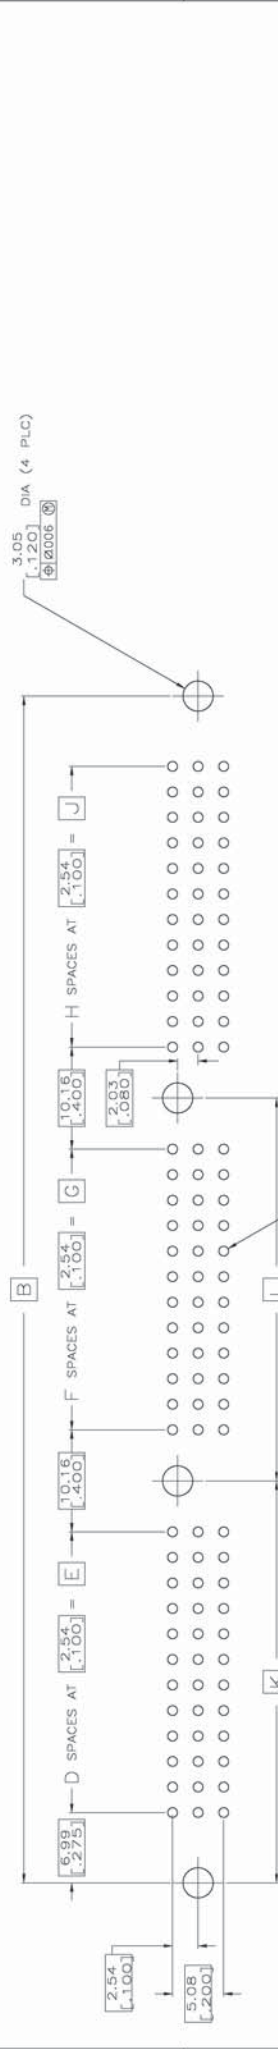


HOUSING MATERIAL: THERMOPLASTIC, COLOR-NATURAL.
 CONTACT MATERIAL: PHOSPHOR BRONZE.
 CONTACT FINISH: .00127-.00254 [.000050-.000100] NICKEL
 CONTACT AREA: TIN PLATED POSTS.
 ACTION PIN POSTS REQUIRE .254 [.010] MIN. THICK P.C. BOARD.
 RECOMMENDED P.C. BOARD HOLES ARE .151 [.0453] DIA. PLATED
 THRU WITH 0.025-0.076 [.001-.003] COPPER,
 WITH 0.0076 [.0003] MIN. TIN-LEAD PLATING.
 FINISHED HOLE AFTER PLATING: 0.94-1.09 [.037-.043] DIA.

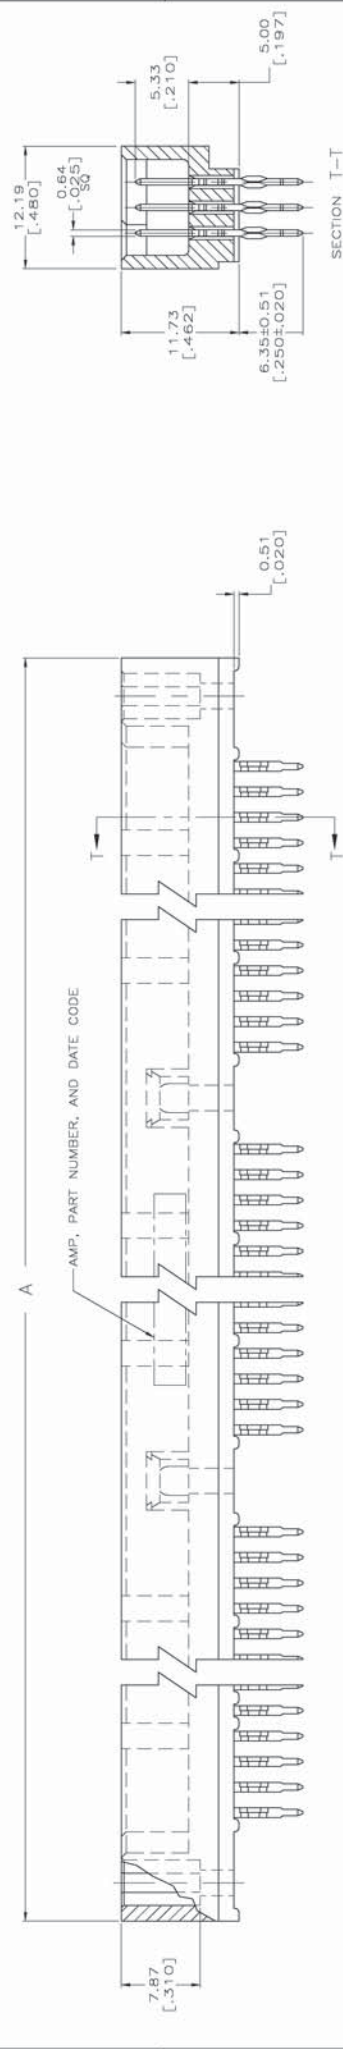

POSN	A	B	C	D	E	F	G	H	J	K	L
392.43	374.65	384.81	46	46	116.84	46	116.84	46	116.84	128.90	127.00
[15.450]	[14.750]	[15.150]	[4.600]	[4.600]	[4.600]	[4.600]	[4.600]	[4.600]	[4.600]	[5.075]	[5.000]
423	361.95	361.95	42	42	106.68	42	106.68	42	106.68	118.74	116.84
[1.4250]	[13.550]	[13.950]	[4.200]	[4.200]	[4.200]	[4.200]	[4.200]	[4.200]	[4.200]	[4.675]	[4.600]

THIS DRAWING IS A CONTROLLED DOCUMENT.

DATE: 11/19/73
 DRAWN BY: JDP
 CHECKED BY: AMS
 APPROVED BY: [Signature]

ASSEMBLY: P.C. BOARD, HOLES ARE .151 [.0453] DIA. PLATED THRU WITH 0.025-0.076 [.001-.003] COPPER, WITH 0.0076 [.0003] MIN. TIN-LEAD PLATING.
 FINISHED HOLE AFTER PLATING: 0.94-1.09 [.037-.043] DIA.

RECOMMENDED P.C. BOARD LAYOUT

5533094-3
 5533094-1

Part 4.1 Rev 1.1