

## SUMMARY

### # Wires

|         |   |
|---------|---|
| Low     | 0 |
| High    | 0 |
| Coax    | 1 |
| Triax   | 0 |
| Quad    | 0 |
| Fiber   | 0 |
| Fluidic | 0 |



Image is for illustrative purpose only

### Download

[Request a quote](#)

[Catalog](#)

|                  |                |
|------------------|----------------|
| Series           | 00             |
| Termination type |                |
| IP rating        | 50             |
| Cable Ø          | 0.00 - 0.00 mm |
| Matching parts   |                |
| Status           |                |
| Alternative part |                |

## TECHNICAL DETAILS

### Mechanics

|                   |   |
|-------------------|---|
| Shell Style/Model | FTY*: Straight plug with two parallel receptacles   |
| Keying            | Circular (can rotate)   |
| Housing Material  | Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces |
| Cable Fixing      | ∅ 0 - 0 mm  |
| Variant           |   |

### Performance

|               |                        |
|---------------|------------------------|
| Configuration | 0.25 : 1 Coax (50 Ohm) |
| Insulator     | T: PTFE                |
| Rated Current | 4 Amps                 |

### Specifications

|               |                |
|---------------|----------------|
| Contact Type: | Coaxial 50 Ohm |
| Max. Matings: | 5000           |
| Test voltage: | 1.1 kV (rms)   |


### Others

Endurance (Shell): 5000 mating cycles  
F ret (min): 100 N  
IP Rating: 50

---

## DRAWINGS

### Draws

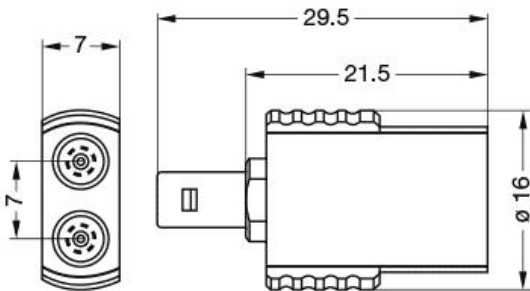

### Dimensions

|     | A    | L    | Weight |
|-----|------|------|--------|
| mm. | 7    | 29.5 | 12.5   |
| in. | 0,28 | 1,16 | 0,49   |

---

## RECOMMENDED BY LEMO

### Tools

None

### Cables