



UNIT:mm

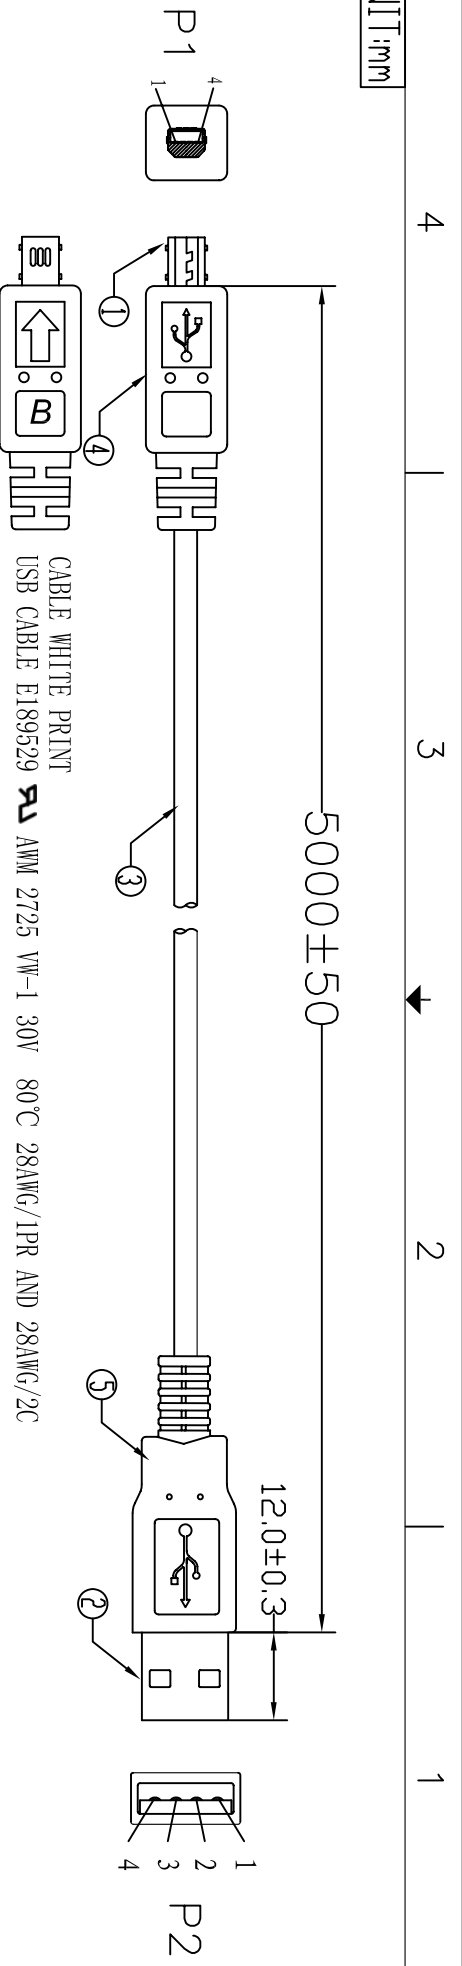


CABLE WHITE PRINT
 USB CABLE E189529
 AWG 27/25 VW-1 30V 80°C 28AWG/1PR AND 28AWG/2C

PIN ASSIGNMENT:

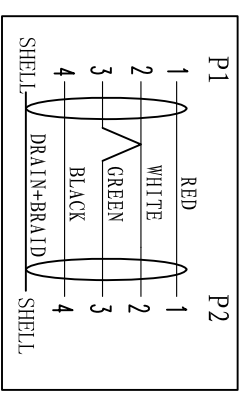

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 2 Ohm(max)
 3. Insulation resistance: 10Mohm(min)
 4. dielectric test: DC 300V

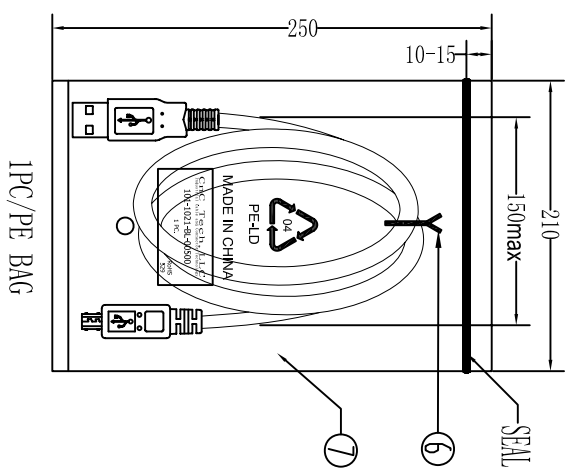

IPC/PE BAG

⑧	PE BAG	1/5	CLEAR SIZE: 330*380*0.05mm	PRINT BLACK"MADE IN CHINA"+"5PCS" 及印生产周期, 有透气孔.
⑦	PE BAG	1	CLEAR SIZE: 210*250*0.05mm	PRINT BLACK"MADE IN CHINA" 及印生产周期, 有透气孔.
⑥	TIE	1	BLACK L=120mm	
⑤	OUT JACKET	6g	BLACK PVC-40P (MOULD NO: WM-40)	
④	OUT JACKET	6g	BLACK PVC-40P (MOULD NO: WM-217)	
③	CABLE	1	BLACK USB1.1 U12725 28#/1P+28#/2C+AEB OD: 3.8mm L=5000±20mm	
②	CONN	1set	USB A MALE 刺破式 SHELL:NICKEL PIN:G/F 4PCS TYPE INSULATOR COLOR:WHITE	
①	CONN	1set	MINI USB 4P B/M 焊接式 PLUG SOLDER TYPE PLASTIC BLACK	
NO.	NAME	Q'TY	SPECIFICATION	

Cnc Tech, LLC
 Industrial Cable and Connector Technology

DRAWN	ZHONGHS	DRAWING NO	
CHECKED		CUSTOMER	
APPROVAL		ITEM NO.	101-1021-BL-00500
DECIDED		DATE	2012-02-17
VERSIONS/EDITED	A/0	PROJECTION	