


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	TLY-13	NEMA 5-15P	1	white overmold
2	TLY-18	C13	1	white overmold
3	30-00245	Wire, 3C, 18 AWG, UL SVT, 300V, 105°C, 6.3 mm, VW-1, PVC, white	1	

(UL) E339575 SVT 3X0.824mm<sup>2</sup>(18AWG) 105C  
 300V VW-1 C(UL) SVT 3X0.824mm<sup>2</sup>(18AWG)  
 105C 300V VW-1 TENSILITY HLE

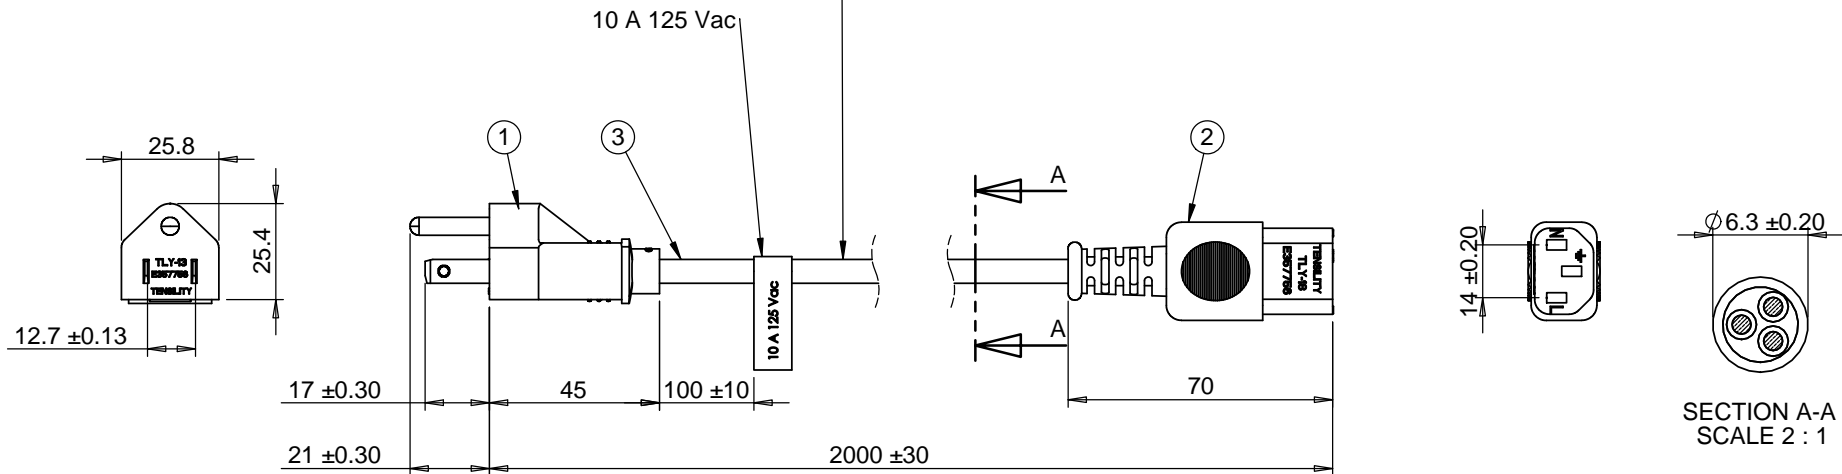

SECTION A-A  
SCALE 2 : 1

Revision	Date	Description	Notes		<h1>TENSILITY</h1> <p>20802 Sockeye Place #130          Bend, OR 97701 USA          tel 541.323.3228 fax 541.323.4202          800 877.670.7118 www.tensility.com</p>				
A	12/20/2012	Initial release	Rated for 10 A at 125 Vac RoHS, REACH and Dodd-Frank conflict materials compliant Function test: no open, no reversed polarity, no short circuit, no INT						
			DIMENSIONS ARE IN MILLIMETERS TOLERANCES: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	DESCRIPTION: Ac cord, 2000 mm, U.S, NEMA 5-15P plug, TLY-13 to C13, TLY-18, 18 AWG, SVT wire, 30-00245, white	SIZE A	Part number <b>11-00029</b>	SCALE:1:2	WEIGHT:	SHEET 1 OF 1