


# TEMP-FLEX

a **molex** company

## INSULATION DISPLACEMENT CABLE

.050" PITCH, 26 AWG, 7/34 STRANDED EXTRUDED FEP

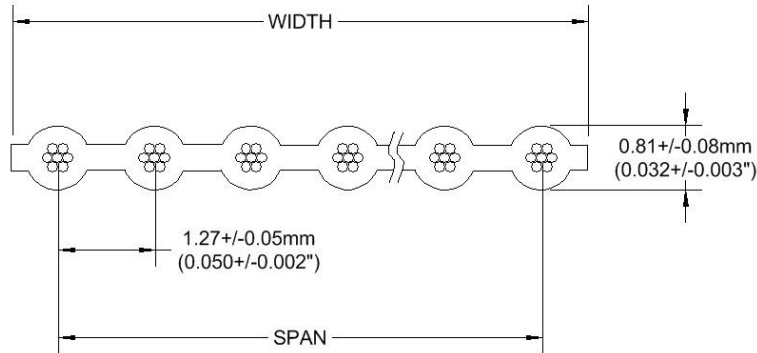

Cond. No.	Part Number	Span	Width
10	1000570094	0.450 ± .007	0.500 ± .007
12	1000570096	0.550 ± .007	0.600 ± .007
14	1000570097	0.650 ± .007	0.700 ± .007
15	1000570439	0.700 ± .007	0.750 ± .007
16	1000570098	0.750 ± .007	0.800 ± .007
20	1000570101	0.950 ± .010	1.000 ± .010
26	1000570107	1.250 ± .010	1.300 ± .010
30	1000570110	1.450 ± .010	1.500 ± .010
34	1000570111	1.650 ± .010	1.700 ± .010
37	1000570441	1.800 ± .010	1.850 ± .010
40	1000570112	1.950 ± .010	2.000 ± .010
50	1000570115	2.450 ± .010	2.500 ± .010
60	1000570118	2.950 ± .015	3.000 ± .015
64	1000570121	3.150 ± .015	3.200 ± .015

CHARACTERISTICS	
Conductor	26 AWG, 7/34 Stranded, Silver Plated Copper
Insulation	FEP
Color	Green
Impedance (ohms)	100 Unbalanced   155 Balanced
Capacitance (pF/ft)	10.0 Unbalanced   5.9 Balanced
Inductance (uH/ft)	0.14 Unbalanced   0.16 Balanced
Insulation Resistance (Mohm)	>500
Voltage Rating	300V
Temperature Rating	200C

### PACKAGING

100 ft./Spool, 10 Ft. minimum length

### MINIMUM ORDER QUANTITY:

500 FT.

UL Style 20424