
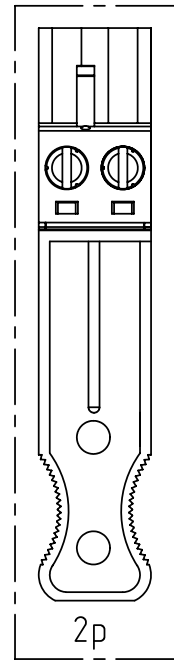
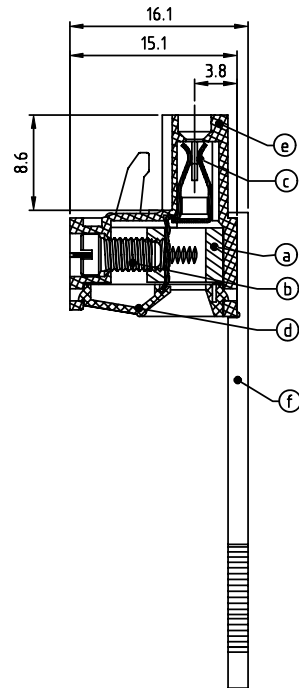


PRODUCT NUMBER	PITCH
TJxx51x400J0G	5.08 mm

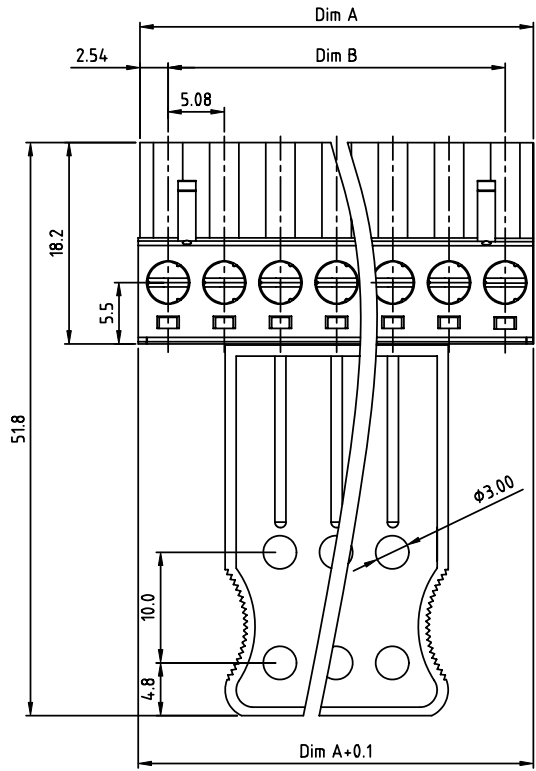

Corresponding poles for the handle

product	handle
2P-4P	2P
5P-9P	5P
10P-15P	8P
16P-24P	12P

N = Number of poles
 Dim A=Nx5.08
 Dim B=(N-1)x5.08

	Dim A	Dim B
2-6p	±0.15	±0.10
7-12p	±0.20	±0.20
13-18p	±0.30	±0.25
19-24p	±0.40	±0.30

Material

- Item ① Clamp: Brass(CuZn) Ni plated
- Item ② Terminal screw: Steel Zinc plating "-" slot type
- Item ③ Female contact: High conductivity copper, Tin plated
- Item ④ Terminal (Cover): Thermoplastic (UL94V-0)
- Item ⑤ Terminal (Body): Thermoplastic (UL94V-0)
- Item ⑥ Handle: Thermoplastic (UL94V-0)

Electrical cULus/VDE/TUV

- Voltage rating: 300V/300V/300V
- Current rating: 20A/20A/20A
- Wire range:
- Solid wire(AWG): 12-24
- Stranded wire(AWG): 12-24
- Torque: 5Lb-In/0.5Nm/0.56Nm
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV/2.5KV/2.5KV
- Operating temperature: -40°C to +115°C
- Safety Approval:

PART NO.: TJ xx 51 x 4 00J0 G

No. of poles	0	Body Color	Black (RAL9005)	RoHS compliant (lead<4%) In copper Alloy
02	2 poles	2	Red (RAL3001/D)	
03	3 poles	3	Orange(RAL2011/P)	
...	...	4	Yellow(RAL1018/A)	
24	24 poles	5	Green(RAL6018/T)	
		6	Blue (RAL5015/A)	
		8	Grey(RAL7035/D)	
		9	White(RAL1102)	
		C	Green(RAL6018/U)	

mat'l. code		surface ASME Y14.5	tolerance ASME Y14.5	projection 	product family TERMINAL BLOCK	
ltr	ecn	no	dr	date	title TERMINAL BLOCK	
tolerances unless otherwise specified					PLUGGABLE PLU, WITH HANDLE	
angles		X.±0.5		scale		
X°±1°		X.XX±0.1		FCI		
dr	HANKE FENG		032614		dwg no	
enr	HANKE FENG		032614		sheet 1 of 1	
chr	SHI JUN		032614		size	
appd	SHI JUN		032614		A4	
sheet index					revision	
sheet					A	
1					CUSTOMER Drawing	