
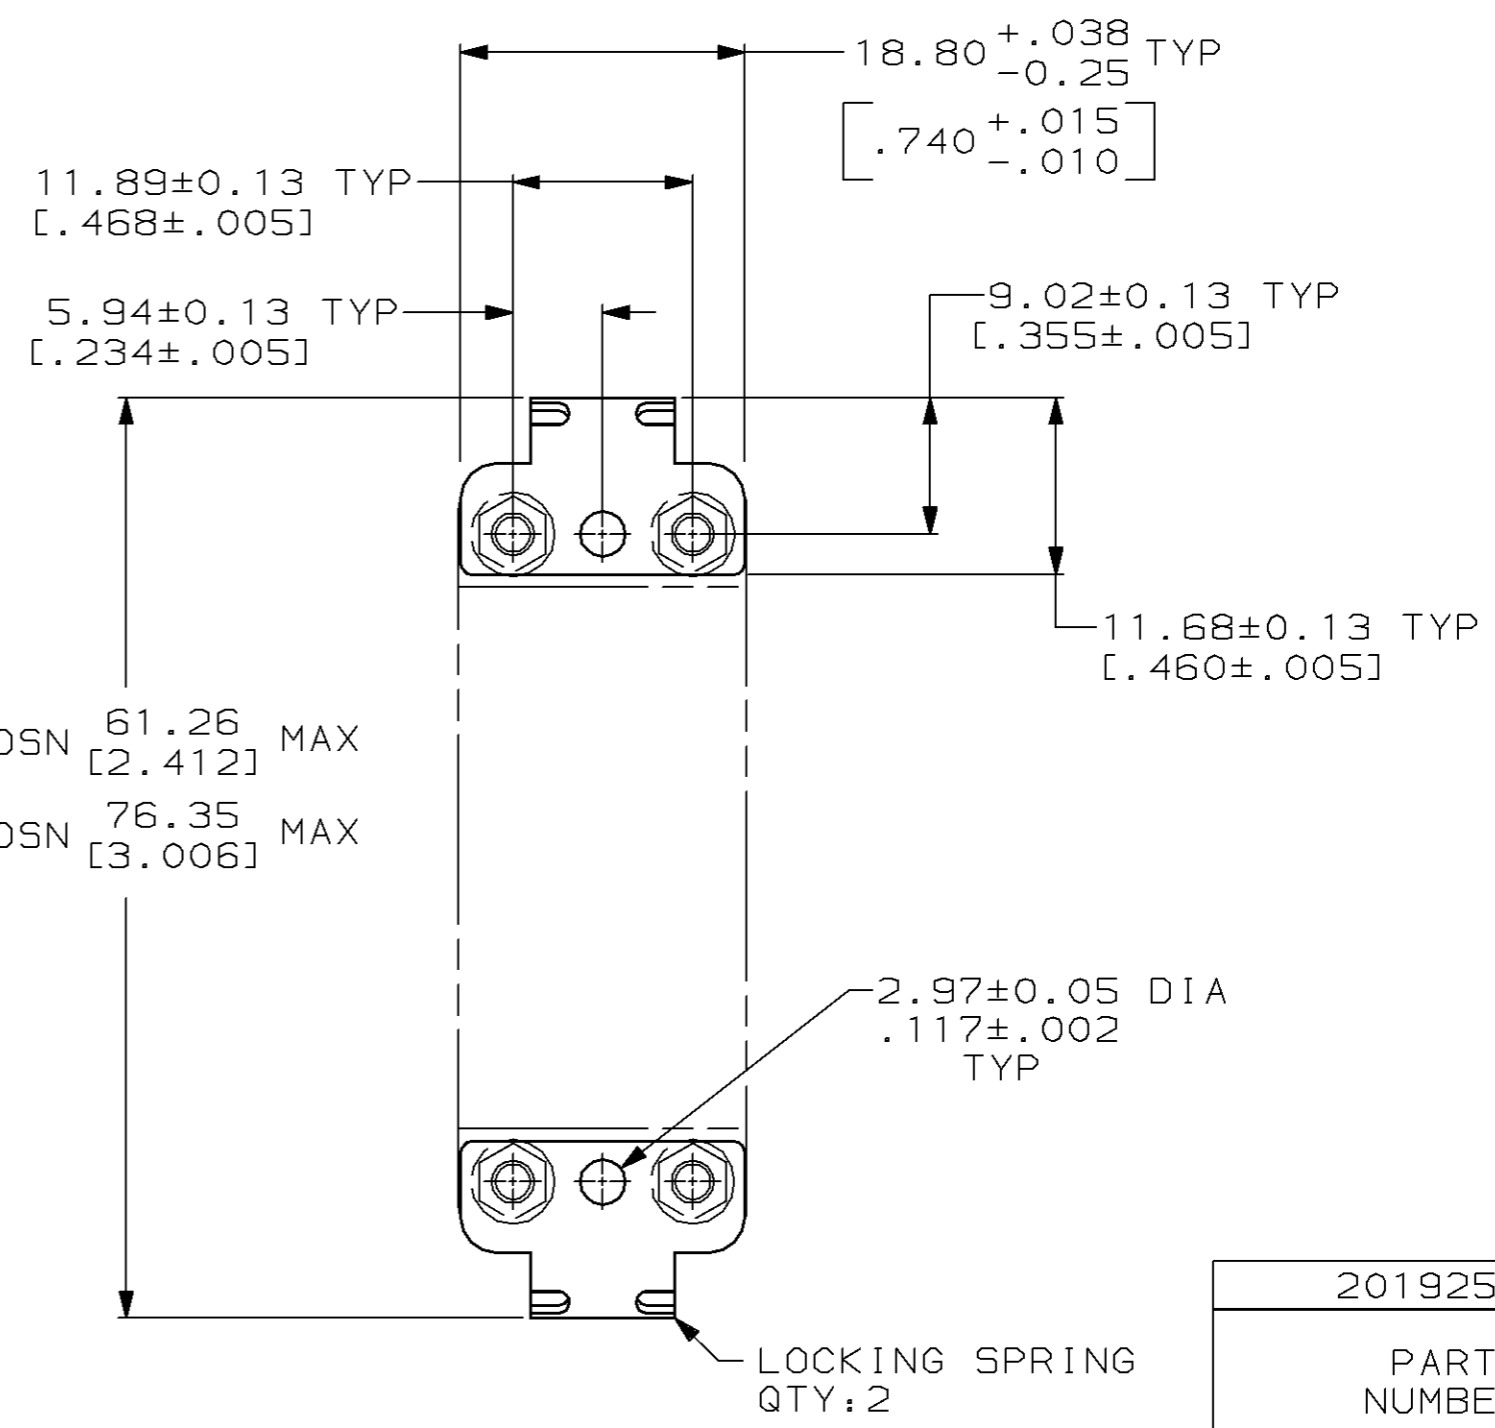


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
BD	36	H	REDRAWN WITHOUT CHANGE	21 SEP 95	-
			PER EC 0020-1084-95		

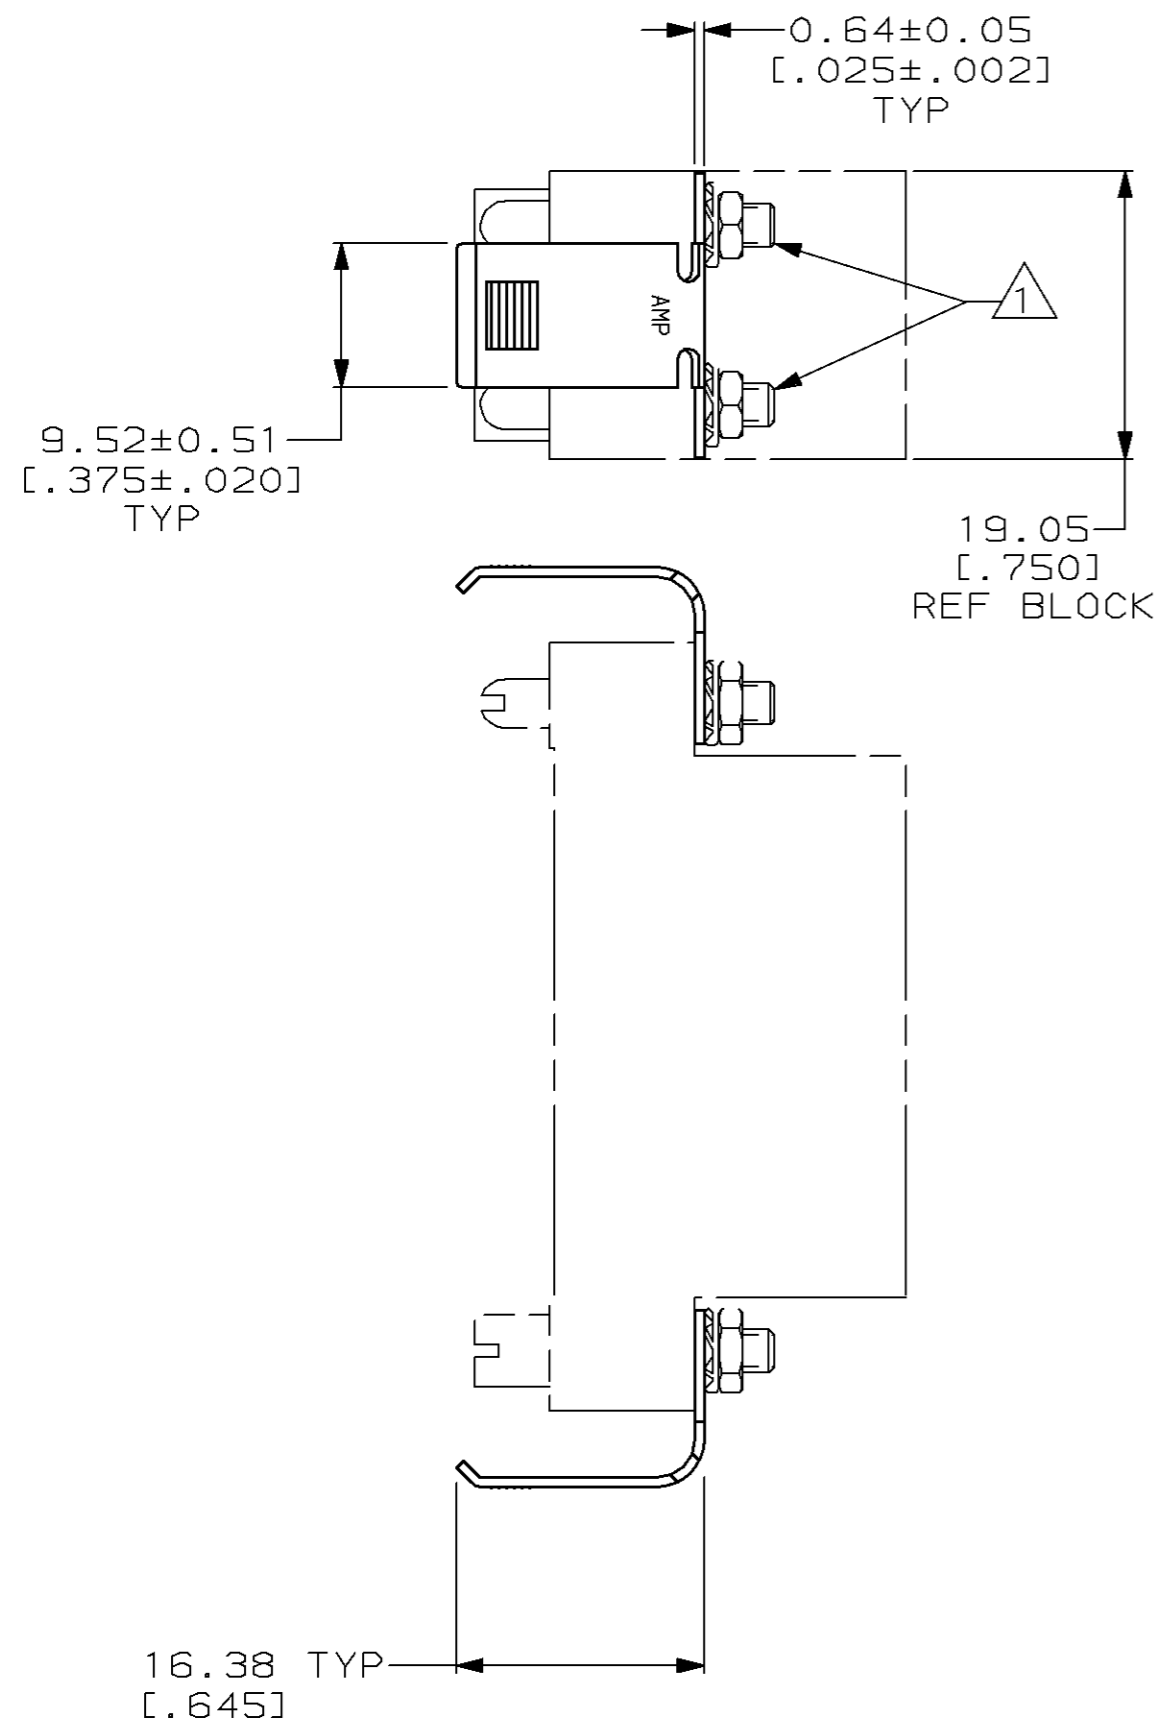

34 POSN 61.26 MAX
 [2.412]
 50 POSN 76.35 MAX
 [3.006]

201925-1
 PART NUMBER

1 SECURED WITH GUIDE PIN & OR SOCKET.
 SEE INSTRUCTION SHEET NO 1409.
 2. FOR MATING PART (SPRING CATCH), SEE 201926.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN D. HARDY 21 SEP 95	AMP AMP Incorporated Harrisburg, PA 17105-3608
DIMENSIONS: mm [INCHES]		CHK R. STONE 21 SEP 95	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G. STEINHAUER 03 OCT 95	NAME LOCKING SPRING KIT, UNASSEMBLED, 34 & 50 POSN BLOCK, M SERIES
0 PLC ±- 1 PLC ±- 2 PLC ±0.38 [.015] 3 PLC ±- 4 PLC ±- ANGLES ±-		PRODUCT SPEC -	SIZE A3
MATERIAL CARBON STEEL		FINISH NICKEL PLATED	CAGE CODE 00779
		WEIGHT -	DRAWING NO C-201925
		CUSTOMER DRAWING	SCALE 2:1
			SHEET 1 OF 1
			REV H