



LOADING PATTERN MATING SIDE

f	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
e	4	4	4	4	4	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9
d	4	4	4	4	4	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9
c	4	4	4	4	4	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9
b	4	4	4	4	4	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9
a	4	4	4	4	4	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9
z	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
POS	0	1	0	5	1	0	1	5	2	0	2	5										


LOADED CONNECTOR ASSEMBLY (FOR EXAMPLE)

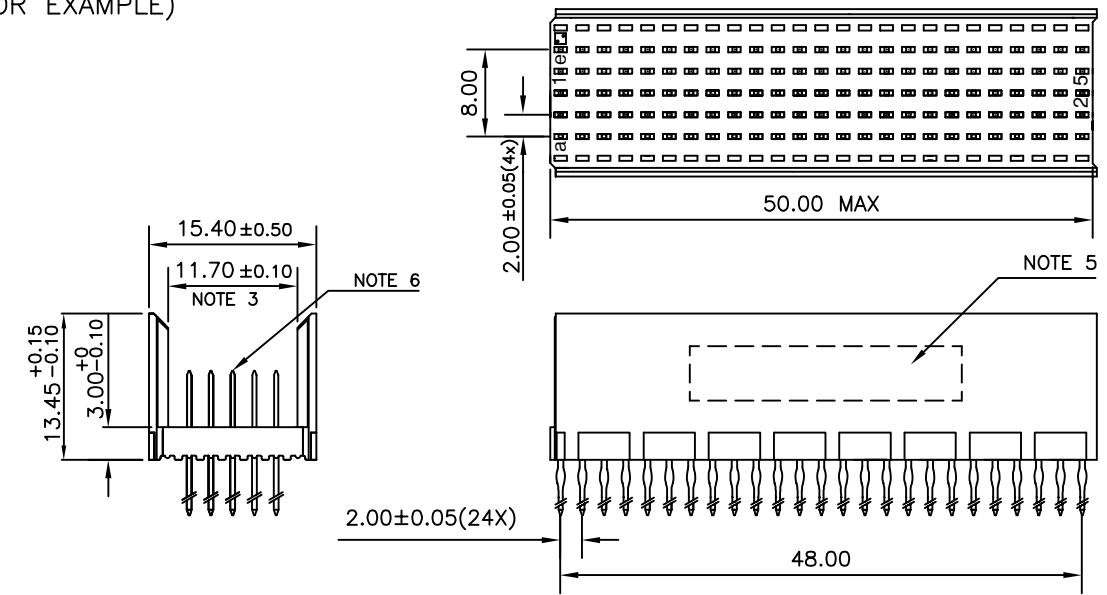

CONTACT OVERVIEW

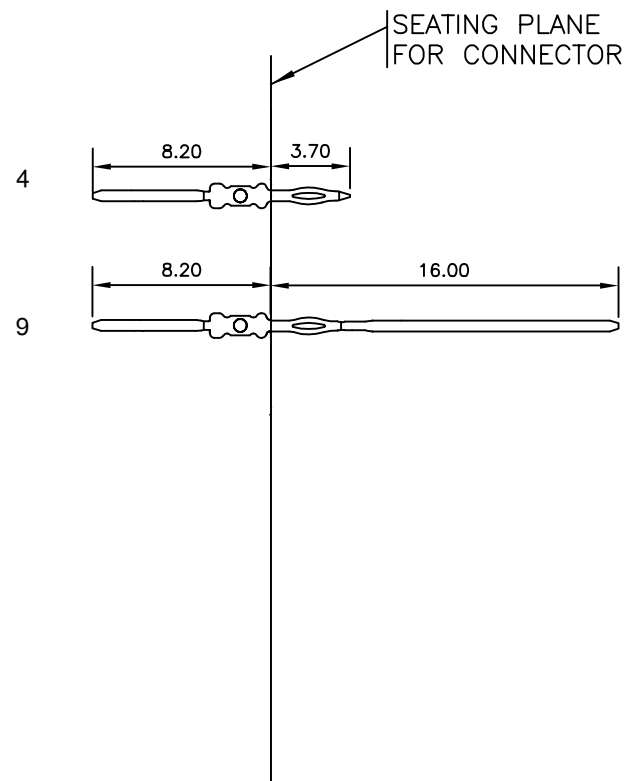

LAY-OUT P.C.B.-HOLE

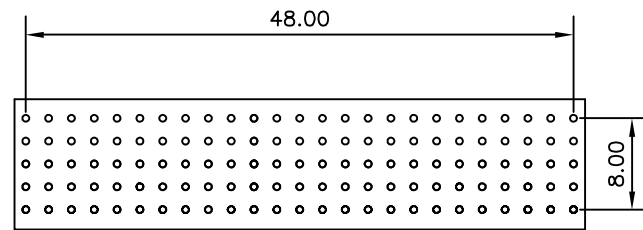

HM2P08PNW220 LEAD FREE INDICATOR : LF = LEAD FREE (DIGIT 15 & 16)
PLATING CODE (DIGIT 13 AND 14)
(REF DRW NO. BS,C , 201844 , 003)

NOTES

- THIS PRODUCT IS CSA APPROVED.
- THIS PRODUCT IS UL RECOGNIZED.
- MEASURED AT THE BOTTOM.
- MATERIAL CONTACT: PHOSPHORBRONZE
HOUSING: CREAM WHITE GLASS FILLED POLYESTER UL-94V0
- CONNECTOR PRINTED WITH P/N AND DATE CODE.
- FOR ACTUAL CONTACT LOADINGS, SEE LOADING PATTERN MATING SIDE.
- SHAPE OF CONNECTOR HOUSING CAN ALTER DEPENDING ON PRODUCTION LOCATION
- THE PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS, A , 201572 , 001

CATALOG NO: HM2P08PNW220----

mat'l. code SEE NOTE 4			surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection MM		product family MILLIPACS						
litr			ecn no		dr		date		tolerances unless otherwise specified		title MPACS 5+2R STR HDR PF CONN TYPE B				
A			103-0031		MKV		04/07/2003		angles		linear		.0±0.2		
B			105-0182		MINI		03/10/2005		0°±1°		linear		.00±0.1		
C			106-0077		MINI		22/06/2006		.000±.00X		scale		-		
							dr		MINI K VANDANATH		04/07/2003		dwg no		
							enr		BIJU K PAUL		04/07/2003		sheet 1 of 1		
							chr		BIJU K PAUL		22/06/2006		size A3		
							appd		K V SIVADAS		22/06/2006		type Product Customer Drawing		
sheet index			revision sheet		C		1								