


## Specification Sheet

Part Number: T50L1STNLM4

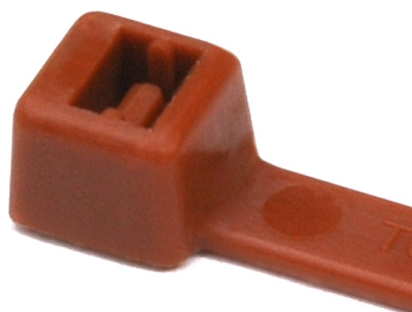

High-Temp Cable Tie, 15.35" Long, 50lb Tensile Strength, PA46, Brown, 1000/pkg

Article Number	111-05423
Type	T50L
Color	Brown (BN)
Features & Benefits	<ul style="list-style-type: none"><li>• Cable ties made of PA46 material provide a greater resistance to high heat exposures than PA66 heat stabilized material.</li><li>• Inside serrations allow for strong hold on cables and wire bundles.</li><li>• Head design provides high tensile strength with very low insertion force.</li><li>• Bent tail ensures a quick and simple installation.</li></ul>
Quantity Per	bag
Product Description	HellermannTyton standard cable ties feature inside serrations providing a positive hold onto wire and cable bundles. The head design guarantees high tensile strength, as well as a low insertion force. The bent tail design allows quick and simple installations by hand. For high volume applications, tensioning tools are available to ensure consistent and safe installation.

<b>Short Description</b>	High-Temp Cable Tie, 15.35" Long, 50lb Tensile Strength, PA46, Brown, 1000/pkg
<b>Global Part Name</b>	T50L-PA46-BN
<b>Minimum Tensile Strength (Imperial)</b>	50.0
<b>Minimum Tensile Strength (Metric)</b>	225.0
<b>Length L (Imperial)</b>	15.35
<b>Length L (Metric)</b>	390.0
<b>Identification Plate Position</b>	none
<b>Releasable Closure</b>	No
<b>Tie Closure</b>	plastic pawl
<b>Variant</b>	Inside Serrated
<b>Width W (Imperial)</b>	0.19
<b>Width W (Metric)</b>	4.8
<b>Bundle Diameter Min (Imperial)</b>	0.06
<b>Bundle Diameter Min (Metric)</b>	1.5
<b>Bundle Diameter Max (Imperial)</b>	4.3
<b>Bundle Diameter Max (Metric)</b>	109.2

<b>Thickness T (Metric)</b>	1.4
<b>Material</b>	Polyamide 4.6 (PA46)
<b>Material Shortcut</b>	PA46
<b>Flammability</b>	UL 94 V2
<b>Operating Temperature (Metric)</b>	-40°F to +266°F (-40°C to +130°C)
<b>ROHS Complaint</b>	Yes
<b>Package Quantity(Imperial)</b>	1000
<b>Package Quantity (Metric)</b>	1000
<b>Customs Number</b>	3926909987