

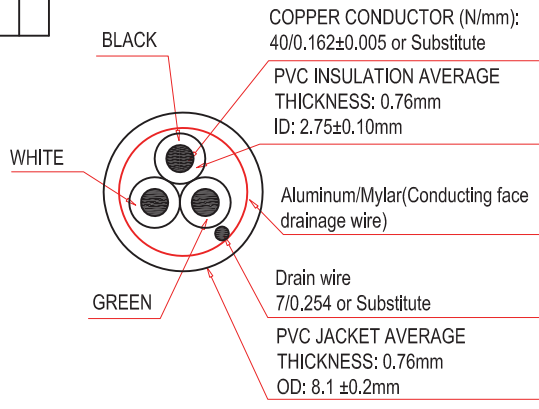


1			2			3			4			5			6			7		
PLUG COMPONENT			PLUG STRIP DIMENSION			SJT 18AWGx3C			END STRIP DIMENSION			TERMINAL COMPONENT								
COLOR	DESCRIPTION	Q'ty	R.I.J	R.O.J	COLOR		R.O.J	R.I.J	COLOR	DESCRIPTION	TYPE									
40P BLACK	PVC Compound	1	6 ⁺¹ ₋₀	15 ± 1	BLACK(L)	60°C Shielded Black Length 3000±50	50.8±5.0	15.9±3.0	BLACK(L)	FULL TINNED										
True color	Assembly Body 111-001-005	1	6 ⁺¹ ₋₀	15 ± 1	WHITE(N)		50.8±5.0	15.9±3.0	WHITE(N)	FULL TINNED										
			6 ⁺¹ ₋₀	15 ± 1	GREEN(E)		50.8±5.0	15.9±3.0	GREEN(E)	FULL TINNED										

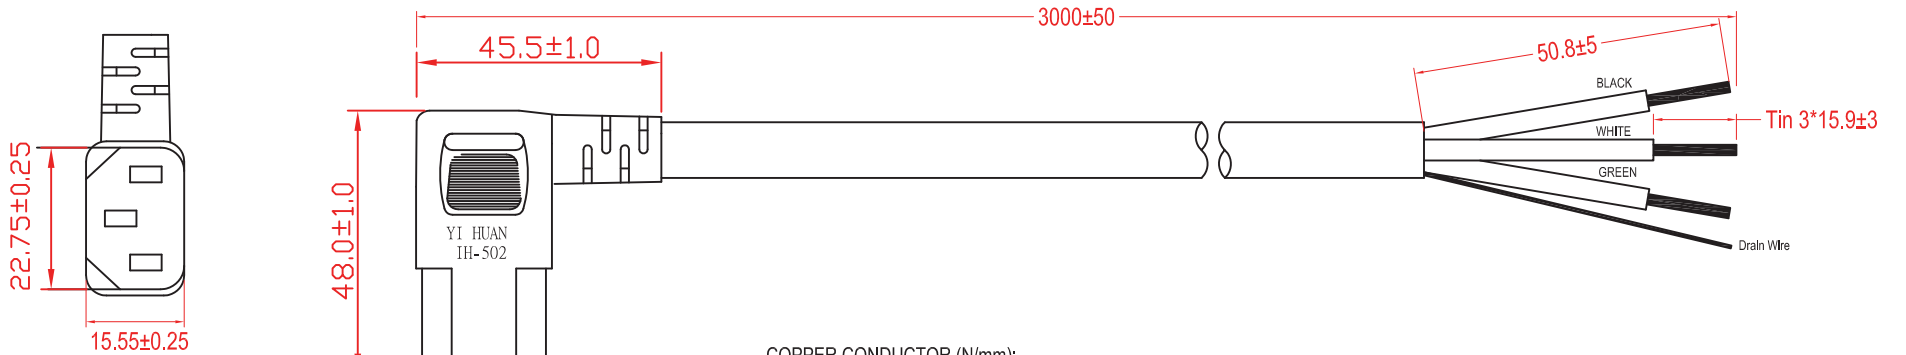

- Material:**
- SJT 3x18AWG(0.824mm²) VW-1 Shielded, 60° 300V
 - Jacket color: Black
 - E- Green; L- Black; N- White

- Electrical:**
- 100% Open & short testing
 - Insulation Resistance: 100MΩ min.
 - Voltage: 500V DC / 1 Min.

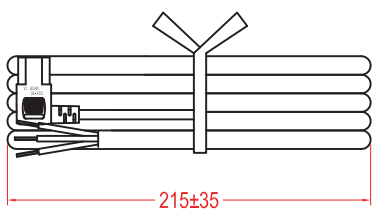

Wire cross section

Hank Dimension

Unit: mm

RoHS
Compliant

Scale	Free					Date	Name	
TOLERANCE						Drawn	30.09.14	Wilson
X.	±X					Approved	30.09.14	Groll
X.X	±X							
X.XX	±X							
DIM	TOL					 1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us		
X.°	±X°							
X.X°	±X°							
Angle	TOL	Id.	Modification	Date	Name			

Title		Power cord - SJT 18AWG 320C13-LA to Open, 3 Meters	
ASSMANN WSWW-No.		A-PC1503-030031-1	
Drawing-No.			
Replace		rev00	
Sheet		1/1	