

HC-B 6-SMLD-52/O1PG16


Order No.: 1675269

The illustration shows version HC-B 6-SML-52/M1PG 16

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1675269>

Box mounting base, with single locking latch, height 52 mm, without screw connection, 1x Pg16, with protective covers

Commercial data

GTIN (EAN)	 4 017918 150006
sales group	D002
Pack	10 pcs.
Customs tariff	85389099

Product notes

WEEE/RoHS-compliant since:
03/01/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Design	B6
Height	52 mm
Width	52 mm
Length	84 mm

Housing type	Box mounting base with cover
Locking type	With single locking latch
Cable exit	Conductor exit direction to the left (looking into the open single locking latch)
Type of the screw connection	1x Pg16
Pg screw connection	None
Protective cover	Yes
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Seal material	NBR
Material lock	High-grade steel, handle: PA-GF
Material grip body interlock	PA-GF
Material, protective cover	PA

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Dimensioned drawing

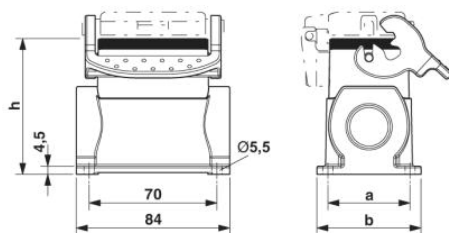

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;