
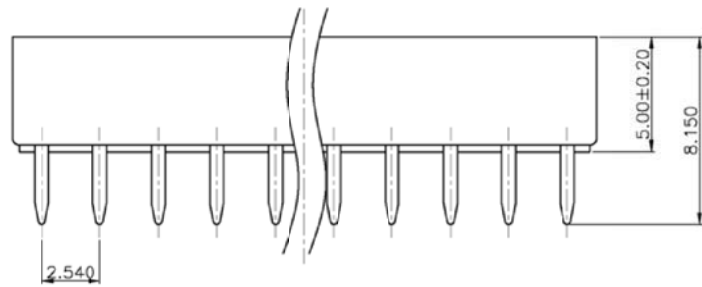


NOTES:
 MATERIAL:
 CONTACTS:PHOSPHOR BRONZE
 INSULATOR:PBT+30% GLASS UL 94V-0
 ELECTRICAL:
 CONTACT CURRENT PATING:1A
 DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC
 CONTACT RESISTANCE: 20milliohms max
 INSULATION RESISTANCE: 1000 MEGOHMS
 CAPACITANCE:0.5PICO-FARAD MAXIMUM
 TEMPERATURE RANGE:-40°C+105°C
 MECHANICAL:
 ENGAGING FORCE:340g/A CONTACT MAX.
 SEPARATING FORCE:20g/A CONTACT MIN.
 DURABILITY:50 CYCLES
 NO.OF CONTACT:6-48
 FINISH:
 CONTACT PLATING:TIN PLATED 6C.03U"-88.35U"



PCB LAYOUT

| PIN NO. | DIM A | DIM B | DIM C | DIM D |
|---------|-------|-------|-------|-------|
| 24 | 30.48 | 27.94 | 15.24 | 17.78 |
| 28 | 35.56 | 33.02 | 15.24 | 17.78 |
| 32 | 40.64 | 38.1 | 15.24 | 17.78 |
| 40 | 50.8 | 48.26 | 15.24 | 17.78 |

| | | | | | |
|--|--------|---------|---|---|---------------------------|
| 2011/06/21 | XIE | | NEW DWG | | A0 |
| DATE | DR.BY | ECN.NO. | DESCRIPTION | MARK | VER. |
| -TOLERANCES- UNLESS OTHERWISE SPECIFIED | | | CnC Tech,LLC Industrial Cable and Connector Technology | | |
| | | |  | TITLE: Low Cost Version IC Socket, Retentive Leg, 7.62MM Pitch | |
| X.X | ±0.30 | X.X* | ±3.00* | APPD: | PRODUCT NO: 245-XX-1-06 |
| X.XX | ±0.25 | X.XX* | ±1.00* | CHECK: | DATE SCALE UNIT TYPE PAGE |
| X.XXX | ±0.100 | X.XXX* | ±0.500* | DRAW: | 2011/06/21 1:1 mm Z 1/1 |