

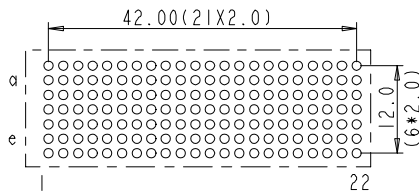



Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriete de c FCI. Droits de reproduction FCI.

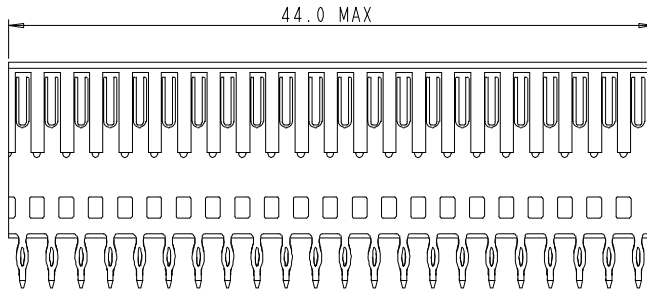

All rights strictly reserved. Reproduction or issue to third parties in any form whatsoever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

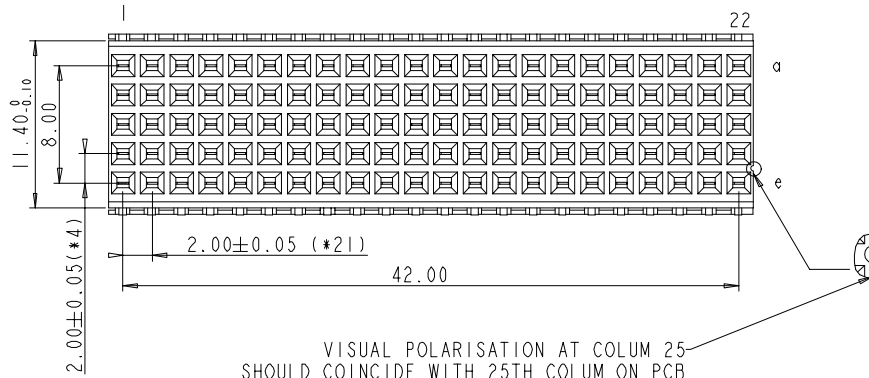

LAY-OUT
P.C.B.-HOLE
(FRONT SIDE)



PERFORMANCE CHARACTERISTICS

- CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
- 1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE : 500 V AC (CONT /CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE 20 MΩ MAX
- INSERTION FORCE : 0.75N MAX/CONT
- EXTRACTION FORCE : 0.15N MIN/CONT
- INSULATION RESISTANCE : 10⁴ MΩ MIN

NOTES

- 1. " " LEAD FREE INDICATOR : LF=LEAD FREE
- " " PERFORMANCE LEVEL INDICATOR (REF DWG NO.BSC .201844.003)
- 2. THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
- 3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
- 4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

rev	ecn no	dr	date
A	CONVERSION REVISION 00	KN	14-09-01
B	104-0109	ALEX E	27-11-04
C	DG05-0278	Mason	02-08-05
D	DG10-0110	NZ	2010.9.3
-	-	-	-
-	-	-	-
-	-	-	-

Material			Spec ref		
Mat code			tolerance 1 DEC±0.2 1 DEC 2 DEC±0.1 2 DEC ANGLE±1° HOEKEN	projection ⊕	MM ↔
Heat treat					
Plating/Finish			size A4	Scale 2.000	
Dr	M.Fret	03-08-99			
Eng	Product family MILLIPICS			REL Level	
Chr	Model Name			ECN	
Appr	Model Revision				
FCI			title MILLIPACS 2 / TYPE B / SHIELDED		dwg no BSC201907020
Pro/E file	catalog no	HM2S70PE5101----	CUSTOMER DRAWING		sheet 1 of 1