



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 3A @120V or 28VDC; 1A @250VAC
5. FIXED TERM. & MOVING CONTACT: Copper Alloy w/SILVER plate.
6. PLUNGER AND BODY: UL94 V0
7. CONTACT RESISTANCE: 20mILLI-ohms initial @2-4VDC.
8. ELECTRICAL LIFE: 60,000 make-and-break cycles at full load.
9. INSULATION RESISTANCE: 1,000M ohm min.
10. DIELECTRIC STRENGTH: 1000V RMS @sea level
11. OPERATING TEMP.: -30°C to 85°C



SWITCH FUNCTION	
DN	(DN)
2-1	2-3

() = MOMENTARY

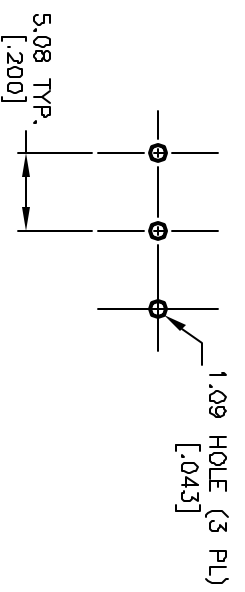

RECOMMENDED P.C.B. LAYOUT

REV.	ECN No.	DESCRIPTION	DATE	CHKD
4	13270	RELEASED FOR PRODUCTION	7/7/03	AR

TITLE	SCALE	DATE	DR	DWG	REV
800 SP-8 B10 M7 Q E/C1 RED (UL94V0)	2:1	7/7/03	AR	XT0096P	A

E-SWITCH®

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED