


## 2.9kW Single-Phase Switched PDU with LX Platform Interface, 120V Outlets (24 5-15/20R), 10 ft. Cord with L5-30P, 0U, TAA

MODEL NUMBER: PDUMV30NETLX

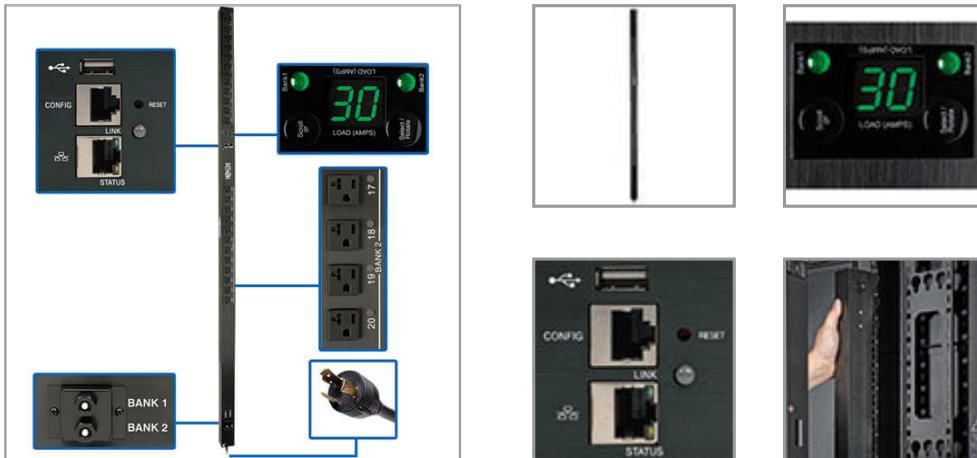

2.9kW vertical PDU distributes, monitors and manages single-phase power in an IT or industrial environment. Built-in network interface helps you remotely monitor load levels to prevent overloads that cause downtime.

### Description

The PDUMV30NETLX 2.9kW Single-Phase Switched PDU provides advanced network control and remote power monitoring with the ability to turn on, turn off, reboot or lock out power to each outlet. Recommended for any IT or industrial application, it features 24 switched NEMA 5-15/20R outlets with included cord retention brackets to prevent cables from becoming accidentally disconnected. A 10-foot cord with NEMA L5-30P plug connects the PDU to a compatible AC power source, generator or protected UPS.

The built-in Java-free HTML5-based LX Platform network interface enables full remote access for PDU status monitoring and email notifications via secure web browser, SNMP, telnet or SSH. It supports 10/100 Mbps auto-sensing for optimum communication with an Ethernet network. Optional EnviroSense2 modules (sold separately) provide a variety of environmental monitoring capabilities. Protocols supported include HTTP, HTTPS, SMTP, SNMPv1, SNMPv2, SNMPv3, telnet, SSH, FTP, DHCP and NTP.

A digital ammeter allows you to monitor each bank's load in real time to ensure it remains well below maximum capacity with no danger of overload. The vertical PDU mounts in 0U of space in EIA-standard 19-inch racks using the included toolless mounting buttons or the included rack-mounting brackets. Use the included PDUMVROTATEBRKT kit to install the unit with outlets facing the rear for better airflow or equipment access.

### Features

#### Distributes Network-Grade Single-Phase Power

### Highlights

- 2.9kW 120V switched PDU
- 24 individually controllable NEMA 5-15/20R outlets
- Built-in LX Platform interface for 24/7 remote access
- Digital ammeter for on-site load monitoring in real time
- NEMA L5-30P input with 10 ft. AC power cord

### Package Includes

- PDUMV30NETLX 2.9kW Single-Phase Switched PDU
- Built-in LX Platform interface
- Configuration cable
- (24) Cable ties
- (2) Cord retention brackets
- Rack-mounting hardware
- PDUMVROTATEBRKT mounting bracket accessory
- Owner's manual



- 2.9kW 120V switched PDU
- Recommended for network applications requiring individual outlet control, load shedding and remote monitoring of critical network components
- NEMA L5-30P plug with 10 ft. cord connects to compatible AC power source
- Firmware upgrades support future product enhancements

#### **24 Switched Outlets Distribute AC Power**

- 24 NEMA 5-15/20R outlets split into 2 separately breakered load banks
- Individual outlets can be remotely controlled to power up, power down, reboot or lock out devices
- Cord retention brackets prevent cables from becoming accidentally disconnected

#### **Digital Ammeter**

- Reports load level on each bank and total PDU output
- Supports IP-address self-ID
- Rotates 180° for easy reading at either angle

#### **Built-In LX Platform Interface**

- Allows full remote access for power monitoring with email notifications via secure web browser, SNMP, telnet or SSH
- Supports 10/100 Mbps auto-sensing for communication with an Ethernet network
- Optional EnviroSense2 modules (sold separately) provide a variety of environmental monitoring capabilities
- No Java required

#### **Broad Communications Compatibility**

- Supports HTTP, HTTPS, SMTP, SNMPv1, SNMPv2, SNMPv3, telnet, SSH, FTP, DHCP and NTP
- Supports automatic and manual assignment of IP address

#### **Easy 0U Installation in EIA-Standard 19 in. Racks**

- Mounts vertically using included toolless buttons or rack-mounting brackets
- Included PDUMVROTATEBRKT allows mounting with rear-facing outlets

#### **TAA-Compliant**

- Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases

## **Specifications**

<b>OVERVIEW</b>	
UPC Code	037332204462



PDU Type	Switched
<b>OUTPUT</b>	
Output Capacity Details	3.05kW (127V), 2.88kW (120V), 2.4kW (100V) / 30A total capacity (Agency de-rated 24A); 20A max per breaker load bank; 16A max per outlet
Frequency Compatibility	50 / 60 Hz
Output Receptacles	(24) 5-15/20R
Output Nominal Voltage	100; 120; 127
Overload Protection	Two 20A breakers protect 12 outlets each
Customized Load Management Receptacles	Each outlet is individually controllable via remote interface
<b>INPUT</b>	
PDU Input Voltage	100; 120; 127
Recommended Electrical Service	30A 120V
Maximum Input Amps	30
Maximum Input Amps Details	Agency de-rated to 24A continuous
PDU Plug Type	NEMA L5-30P
Input Cord Length (ft.)	10
Input Cord Length (m)	3.05
Input Phase	Single-Phase
<b>USER INTERFACE, ALERTS &amp; CONTROLS</b>	
Front Panel LCD Display	Digital display reports output amps in 3 separately metered loading segments (BANK 1: Outlets #1-12; BANK 2: Outlets #13-24; BANK 3: All outlets combined)
Front Panel LEDs	24 power availability LEDs confirm power off/on status for each built-in outlet
Switches	Pushbutton scroll button enables local power consumption display of each load bank, display rotate and display IP address functions
<b>PHYSICAL</b>	
Shipping Dimensions (hwd / in.)	4.00 x 6.00 x 72.50
Shipping Dimensions (hwd / cm)	10.16 x 15.24 x 184.15
Shipping Weight (lbs.)	16.50
Shipping Weight (kg)	7.48
Unit Dimensions (hwd / in.)	70 x 2.19 x 2.65
Unit Dimensions (hwd / cm)	177.8 x 5.6 x 6.73
Unit Weight (lbs.)	14.1
Unit Weight (kg)	6.40
Form Factors Supported	0U vertical rackmount; includes rackmount brackets. Supports toolless mounting in button-mount compatible racks



PDU Form Factor	Vertical (0U)
<b>ENVIRONMENTAL</b>	
Storage Temperature Range	-15 to 60C / 5 to 140F
Relative Humidity	Up to 95% non-condensing
<b>COMMUNICATIONS</b>	
SNMP Compatibility	Pre-installed LX platform interface provides remote monitoring via Java-free HTML5 web interface, telnet, SSH and SNMP management systems
<b>CERTIFICATIONS</b>	
Certifications	Tested to UL 60950-1: 2007 (USA), CAN/CSA-C22.2 NO. 60950-1-07 (Canada), FCC Class A Part 15 (Emissions), NOM (Mexico), RoHS compliant, TAA Compliant
<b>WARRANTY</b>	
Product Warranty Period (Worldwide)	2-year limited warranty

© 2018 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>