


Female connectors, angled

Identification	No. of contacts	Contact length [mm] termination side	Part number
Type B19 VME, Position P0	95	3.4	17 25 095 1101 <b>17 25 095 2101</b>
Type B19 with upper shield CompactPCI, Position J3 – VME, Position P0	95	3.4	17 25 095 1102 <b>17 25 095 2102</b>
Lower shield for type B19 connectors			17 25 000 4102
Type B22	110	3.4	17 24 110 1101 <b>17 24 110 2101</b>
Type B22 with upper shield CompactPCI, Positions J2, J5	110	3.4	17 24 110 1102 <b>17 24 110 2102</b>
Lower shield for type B22 connectors			17 24 000 4102
Type B25	125	3.4	17 22 125 1101 <b>17 22 125 2101</b>
Type B25 with upper shield	125	3.4	17 22 125 1102 <b>17 22 125 2102</b>
Lower shield for type B25 connectors			17 22 000 4102

Contact positions	X <sub>1</sub>	X <sub>2</sub>
19	37.9	18 x 2 (= 36)
22	43.9	21 x 2 (= 42)
25	49.9	24 x 2 (= 48)

Dimensions [mm]

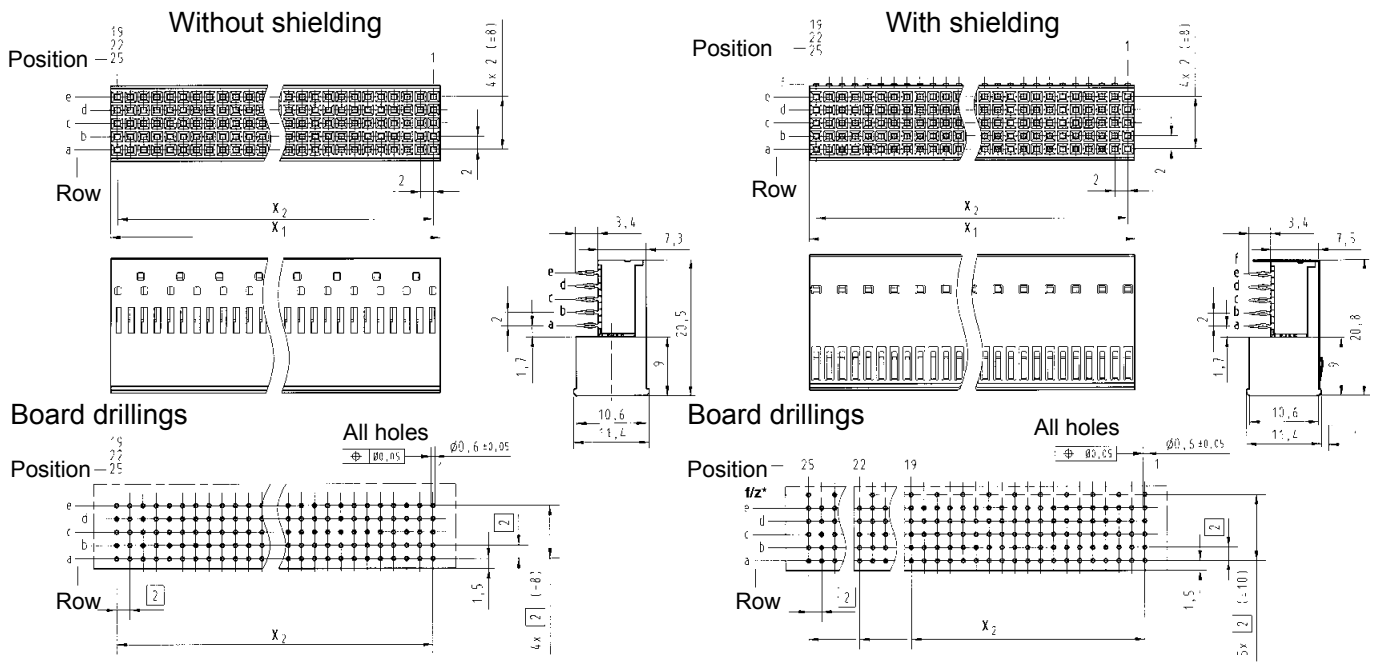

Thin print part numbers: performance level 1  
**Bold print part numbers: performance level 2**

\* hole on even contact numbers only needed for lower shielding