



A
B
C
D
E
F
G
H

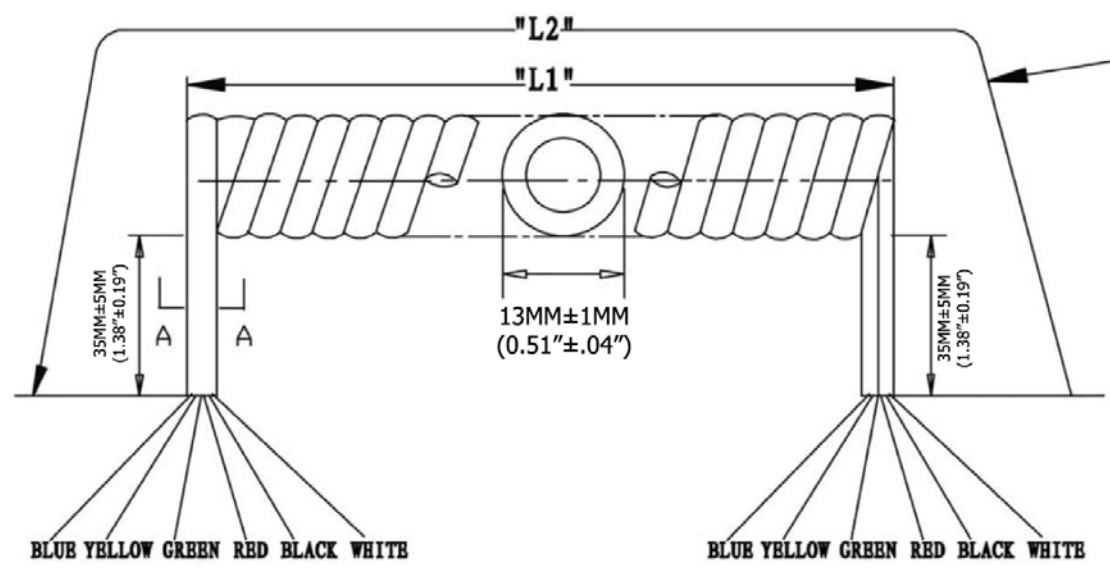

Extended length is with 500g of force

BLUE YELLOW GREEN RED BLACK WHITE

BLUE YELLOW GREEN RED BLACK WHITE

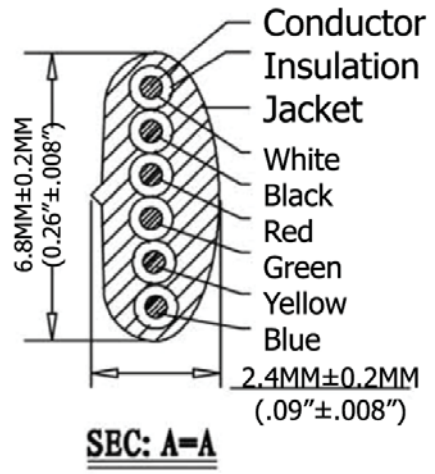

SEC: A=A

Extended Length ("L2")	Typical Retracted Length ("L1")
168.0 Inches - 193.2 Inches	53.5 Inches
4,267.2MM-4,907.28MM	1,358.9MM

Material:

- Conductor(X6C): 26AWG (0.12X12) Bare Copper
- Insulation(X6C):PP6331 ID 0.95-1.0
- Jacket: PVC NO UL 80P
- Package: Individual PE Bag



Scale	1:1					Name	Item No. AT-K-C-26-6-B/14
TOLERANCE				Drawn	12.19.11	Chappell	
X.X	±0.40			Approved			Title NON-UL 26AWG (0.16/7)*6C, O.D.: 2.4*6.8MM, Pre-Cut, 14Ft., Black
X.XX	±0.25						
X.XXX	±0.15						Drawing No.
Angle	±3°						
							Replace
							Sheet



A
B
C
D
E
F
G
H