

4


3

2


1

used for:


D-SUB



Wire size AWG	Crimp height A
24	0,68 - 0,86
22	0,68 - 0,86
20	0,68 - 0,86

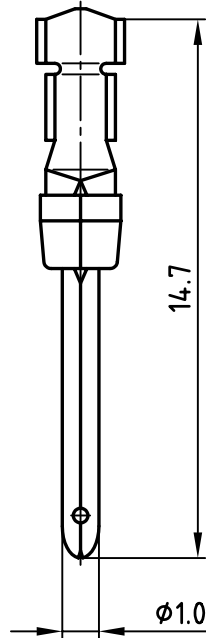

STRIPPING DIMENSIONS



Finish

Part-NO.

8µ" hard-gold-plated in the contact area	163A20679X
30µ" hard-gold-plated in the contact area	163C20679X

NOTES:

Material: phosphor bronze

Finish: see table

Temperature range: -55°C to +125°C

Rated current: 7.5A

Contact resistance: <= 10mOhm

Crimping: use crimp tool 360X10079X

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

Directive 2002/95/EC
"RoHS"
Compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

			tolerance	dim. in mm	
2005	date				name
drawn	07.04.				Lehmenkühler
appd.	07.04.				Mickenbecker
norm					
d-old					
rev.	description	date	name	CONEC®	

scale:	5:1	
material:	SEE NOTES	
title:	PLUG CONTACT CRIMP AWG24-20 (separate contacts)	
dwg no:	AutoCAD 2004	DIN-A
	16K1A1363	4
		sh: 1/1
part no:	SEE TABLE	

4

3

2

1