


Directive 2002/95/EC
„RoHS“
Compliant

STRIPPING DIMENSION

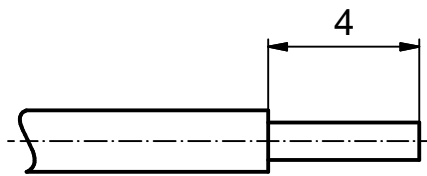

NOTES:

1. MATERIAL: COPPER ALLOY
2. PLATING: SEE TABLE
3. CRIMPING: USE CRIMP TOOL 360X10329X WITH TOOL INSERT 360X20039X
- ⓑ SELECTOR SETTINGS: 7 FOR AWG 24
6 FOR AWG 26
5 FOR AWG 28

ⓑ	Plating	Part-No.
	min. 8µm HARD GOLD over min. 50µm NICKEL	131A15029X
	min. 30µm HARD GOLD over min. 50µm NICKEL	131C15029X
	min. 50µm HARD GOLD over min. 50µm NICKEL	131J15029X

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

3 x b	Ä 3706	03.08.10	Lehm.
a	Origin		
rev.	description	date	name

tolerance		dim. in mm
drawn	29.04.08	Petker
appd.	30.04.08	Mickenbecker
norm		
d-old		



scale:	5.1	
material:	SEE NOTES	
title:	SIGNAL CRIMP CONTACT MALE CONTACT ⓑ Wire Size 24-28	
dwg no:	Inventor 10	DIN-A4
	16K1A2290	sh: 1
part no:	SEE TABLE	