

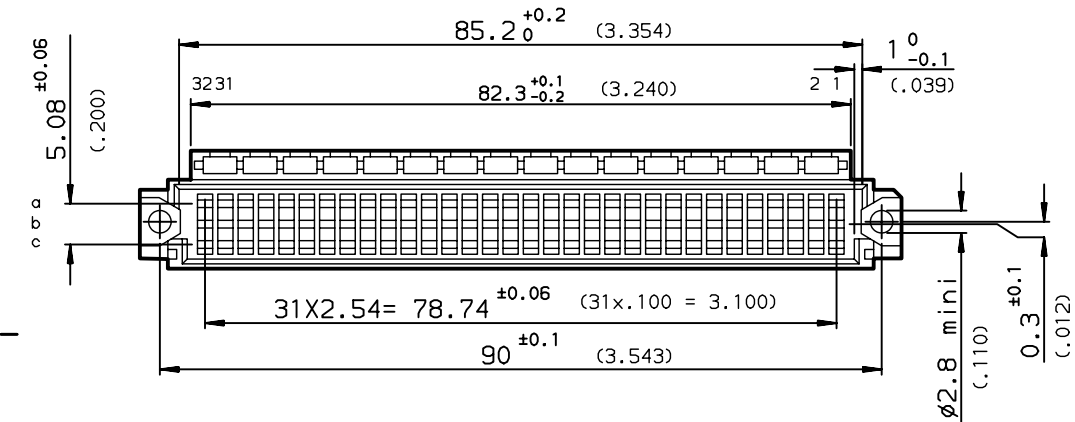
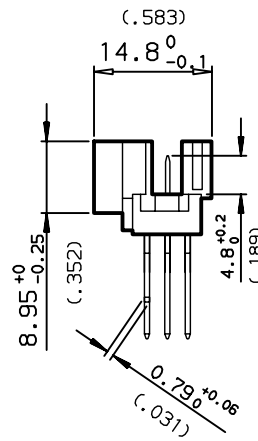


DIMENSIONS mm (inches)

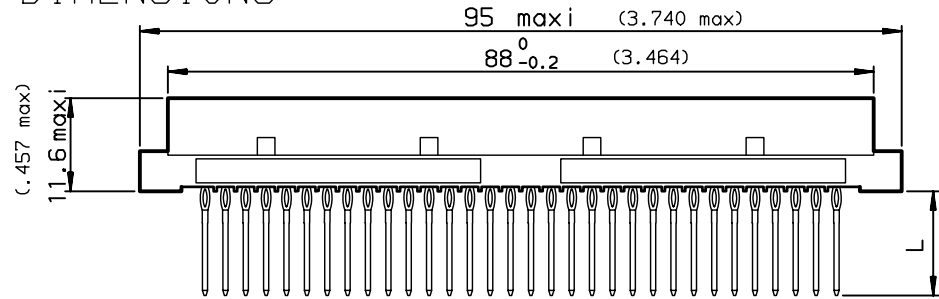

PART NUMBER	8609		08	7	5	
PIN OUT						
rows a-b-c		3	96			
rows a-c		4	64			
NUMBER OF CONTACTS						
TERMINATION						
L = 13.25 ±0.25 (.521)		1 wrap				91
L = 17.25 ±0.25 (.679)		2 wraps				92
L = 20.95 ±0.25 (.825)		3 wraps				93
L = 4.20 ±0.25 (.165)		short post				94
PERFORMANCE CLASS						
DIN 41612 class 3						4
DIN 41612 class 2						5
DIN 41612 class 1						6
TERMINATION TYPE						
TIN LEAD						- 000E1
LEAD FREE						- E1LF

PCB DRILLING

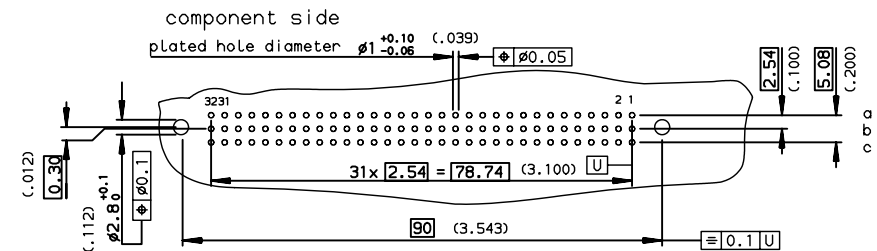

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000C

European Views

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	ROUILLARD	1996/09/04	0.X	±0.1	size A3
Eng	TARON	1996/09/04	0.XX	±0.1	Scale 1.5
Chr	LEGARE	1996/09/04	0.XX' ±2'		ECN LS06-0095
Appr	LEGARE	1996/09/04	0.XXX	±0.1	Spec ref -
		Product family	DIN 8609		
FCJ		title STRAIGHT MALE - STYLE R		dwg no	Rev.
		PRESS FIT WITH KEYING		C-8609-0521	6
		catalog no	CUSTOMER		sheet 1 of 1

rev	ecn no	dr	date
E	-	ROU	1999/11/30
F	LS05-004	JTA	2005/02/28
G	LS06-0095	LGO	2006/07/12
-	-	-	-
-	-	-	-
-	-	-	-