


1 2 3 4 5 6 7



Panel Thickness  
 Screw L=5.0 For Panel Thickness Under 1.2mm  
 Screw L=6.0 For Panel Thickness Between 1.2~2.0mm

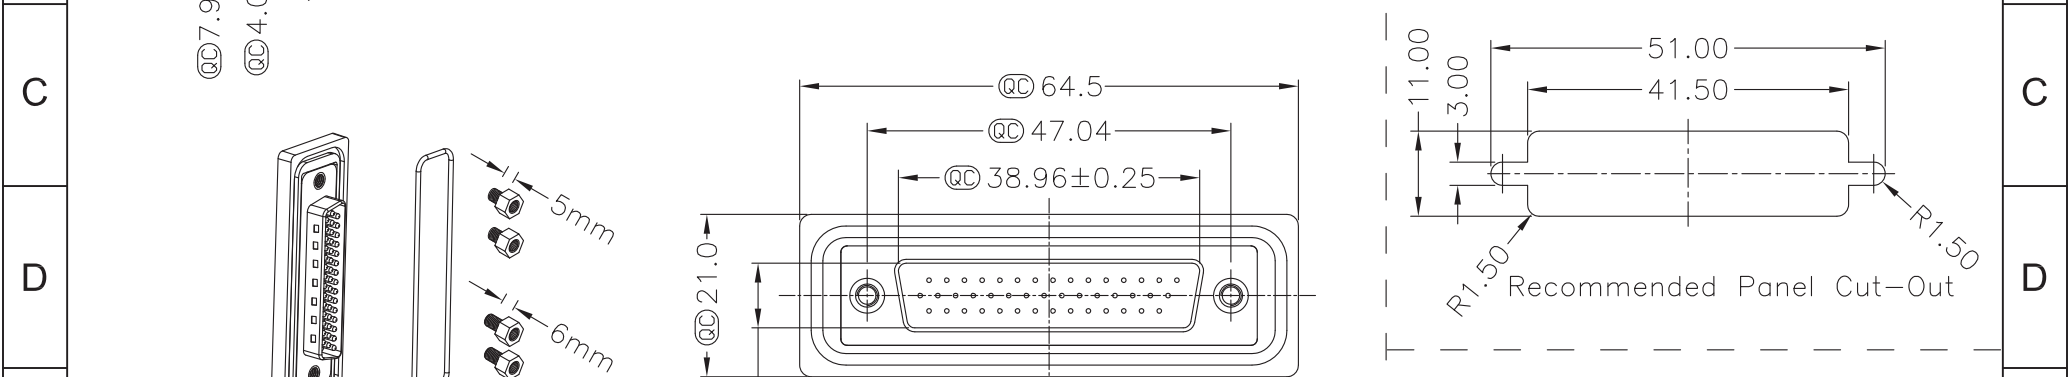

**Material:**

- Waterproof rate: IP67
- Connector: Black, Nylon+GF
- Pin: Copper alloy, Gold plated

44 Pin Male Connector  
 PCB Pin Layout

Scale	Free					Date	Name	Title
TOLERANCE						Drawn	30.11.11	Chappell
X.X	$\pm 0.25$					Approved		
X.XX	$\pm 0.10$							ASSMANN WSW-No.
X.XXX	$\pm 0.05$							A-HDS44PP-WP-R
DIM	TOL							Drawing-No.
X.°	$\pm 1^\circ$							rev00
X.X°	$\pm X^\circ$							Replace
Angle	TOL	Id.	Modification	Date	Name			Sheet
								1/1

Unit: mm

**RoHS**  
Compliant

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283  
 Toll Free: 1-877-277-6266 • Email: info@assmann.us

1 2 3 4 5 6 7