




All rights strictly reserved. Reproduction or issue to third parties in any form whatsoever is not permitted without written authority from the proprietor.
 Property of c BERG ELECTRONICS.
 Copyright BERG ELECTRONICS by





Tous droits strictement reserves. Reproduction ou communication de tiers int sans aucune forme que ce soit sans autorisation écrite du propriétaire.
 propriété de c BERG ELECTRONICS.
 Droits de reproduction BERG ELECTRONICS by

PRODUCT NO	CONDUCTOR POS NO	CONDUCTOR ASSY POS NO	CONTACT PLATING	HOUSING COLOR
67968-001	6/4	2,3,4,5	15u" AU	GRAY
67968-001LF			15u" AU	GRAY
67968-002	6/6	1,2,3,4,5,6	15u" AU	GRAY
67968-002LF				

LEAD FREE PRODUCT NO.

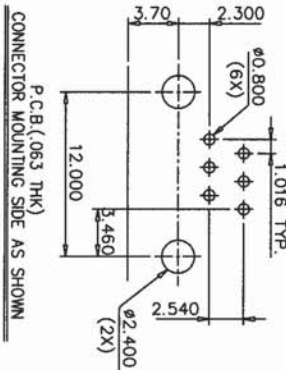

P.C.B.(.063 THK)
 CONNECTOR MOUNTING SIDE AS SHOWN

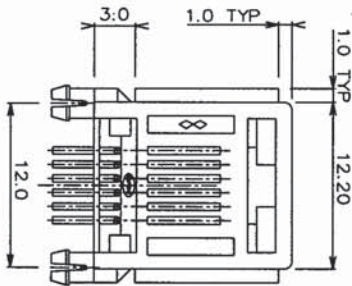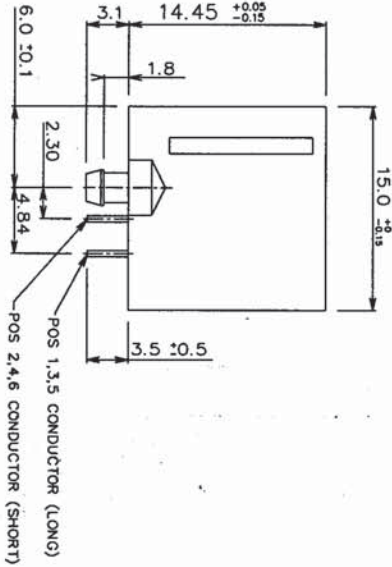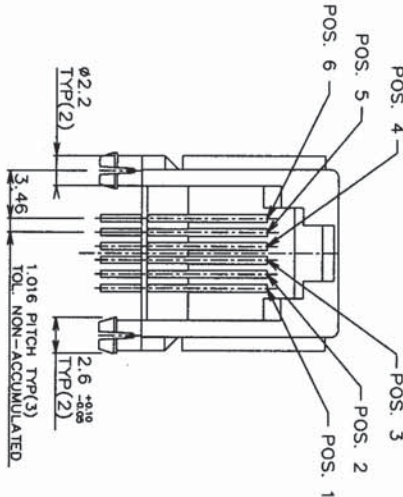

- NOTE:
- FOR VISUAL, MECHANICAL AND FUNCTIONAL REQUIREMENTS SEE PRODUCT SPEC. 110-015.
 - HOUSING MATL: GLASS REINFORCED NYLON 66 ZYTEL-FR50, UL 94 V-0.
 - GOLD WIRE MATL: PHOSPHOR BRONZE 0.06 DIA.
 - A. STANDARD PACKAGING METHOD(USE TRAY): SEE GS-14-351. B. NON-STANDARD PACKAGING METHOD(USE TUBE): SEE GS-14-358. THE PART NO. SHOULD BE SUFFIXED WITH "T" OR "TLF". (E.G.67968-001T OR 67968-001TLF)
 - MATABLE PLUG: PLUG CONFORMED TO FCC TYPE 623.
 - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm MINIMUM THICK CIRCUIT BOARD.
 - IF LF P/N PACKAGING MEETS GS-14-920 SPECIFICATION.

rev. ecn no	dr date	lineor	tolerance unless otherwise specified	CUSTOMER COPY	title	product family	mod jack	code
H	11/02/93		0.0 ± 0.25		LOW PROFILE 6POS PCB MOD JACK			
J	10/01/93		0.00 ± 0.13					
K	10/02/94		0.00 ± 0.05					
L	10/28/03		± .2					
M	10/28/03		± .2					

PDM: Rev:M STATUS:Released Printed: Mar 09, 2007