

SUMMARY

Wires

Low	3
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

Series	2T
Termination type	Male solder
IP rating	68
Cable Ø	6.60 - 7.00 mm
Matching parts	EGG.2T.303.CLL
Status	
Alternative part	

TECHNICAL DETAILS

Mechanics

Shell Style/Model	FG*: Straight plug, cable collet
Keying	
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	C70: 6.6 - 7 mm
Variant	

Performance

Configuration	
Insulator	
Rated Current	17 Amps

Specifications

Contact Type:	Solder
Vtest:	1850 V (DC)1300 V (AC)


Others

Temp (min / max): -55°C / +200°C

Humidity (max): <=95% [at 60 deg C /140 F]
Vibration: 15 g [10 Hz - 2000 Hz]
Shock Resistance: 100 g [6 ms]
Salt Spray Corrosion: >144 hr
Climatical Category: 50/175/21
Shielding (min): 75 dB (10 MHz)
Shielding (min): 40 dB (1 GHz)
IP Rating: 68

DRAWINGS

Draws

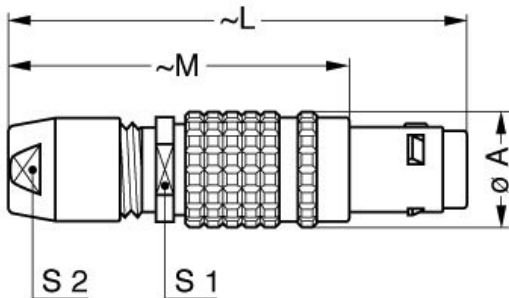

Dimensions

	A	L	M
mm.	15	55	43
in.	0,59	2,17	1,69

RECOMMENDED BY LEMO

Tools

None

Cables