


RECOMMENDED P.C.B LAYOUT




CIRCUIT: SPDT


SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
2-3	DN	2-1

NOTES:


1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 0.4VA @20VAC or 28VAC or DC  
Cu alloy w/GOLD plate over Nickel.
5. FIXED TERMINAL & MOVING CONTACT:
6. ELECTRIC LIFE: 30,000 make-and-break cycles  
at full load.
7. INSULATION RESISTANCE: 1,000 M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to +85°C
10. 2002/95/EC (ROHS) COMPLIANT

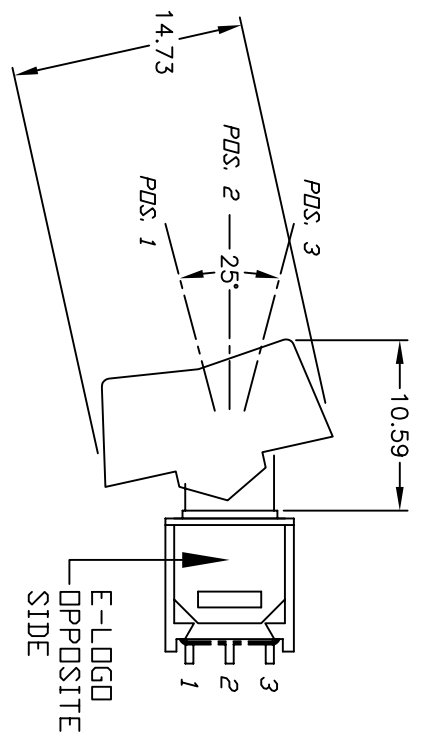

BLACK ACTUATOR

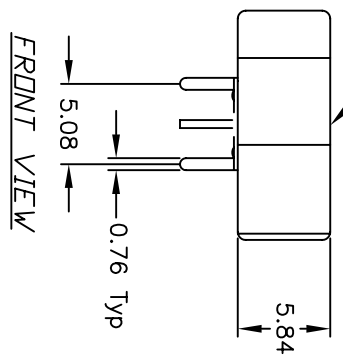

FRONT VIEW

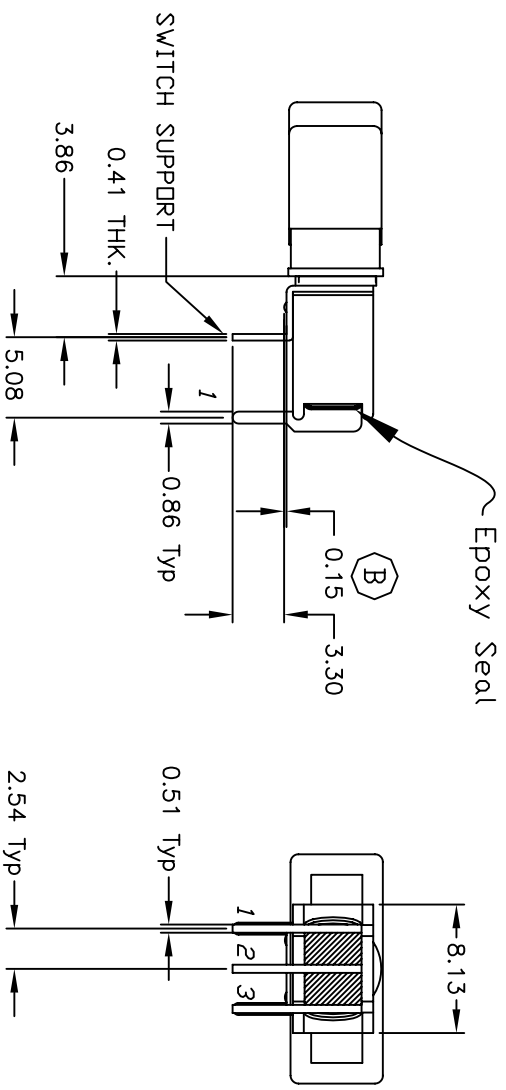

REV.	PCR No.	DESCRIPTION	DATE	CHKD
B	17565	CHANGED DIM. .51 TO 0.15	8/16/07	BF

TITLE	SCALE	DATE	DR	DWG	REV
400MSP1R6BLK6RE	2:1	8/16/07	BF	T411011	B



THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED