

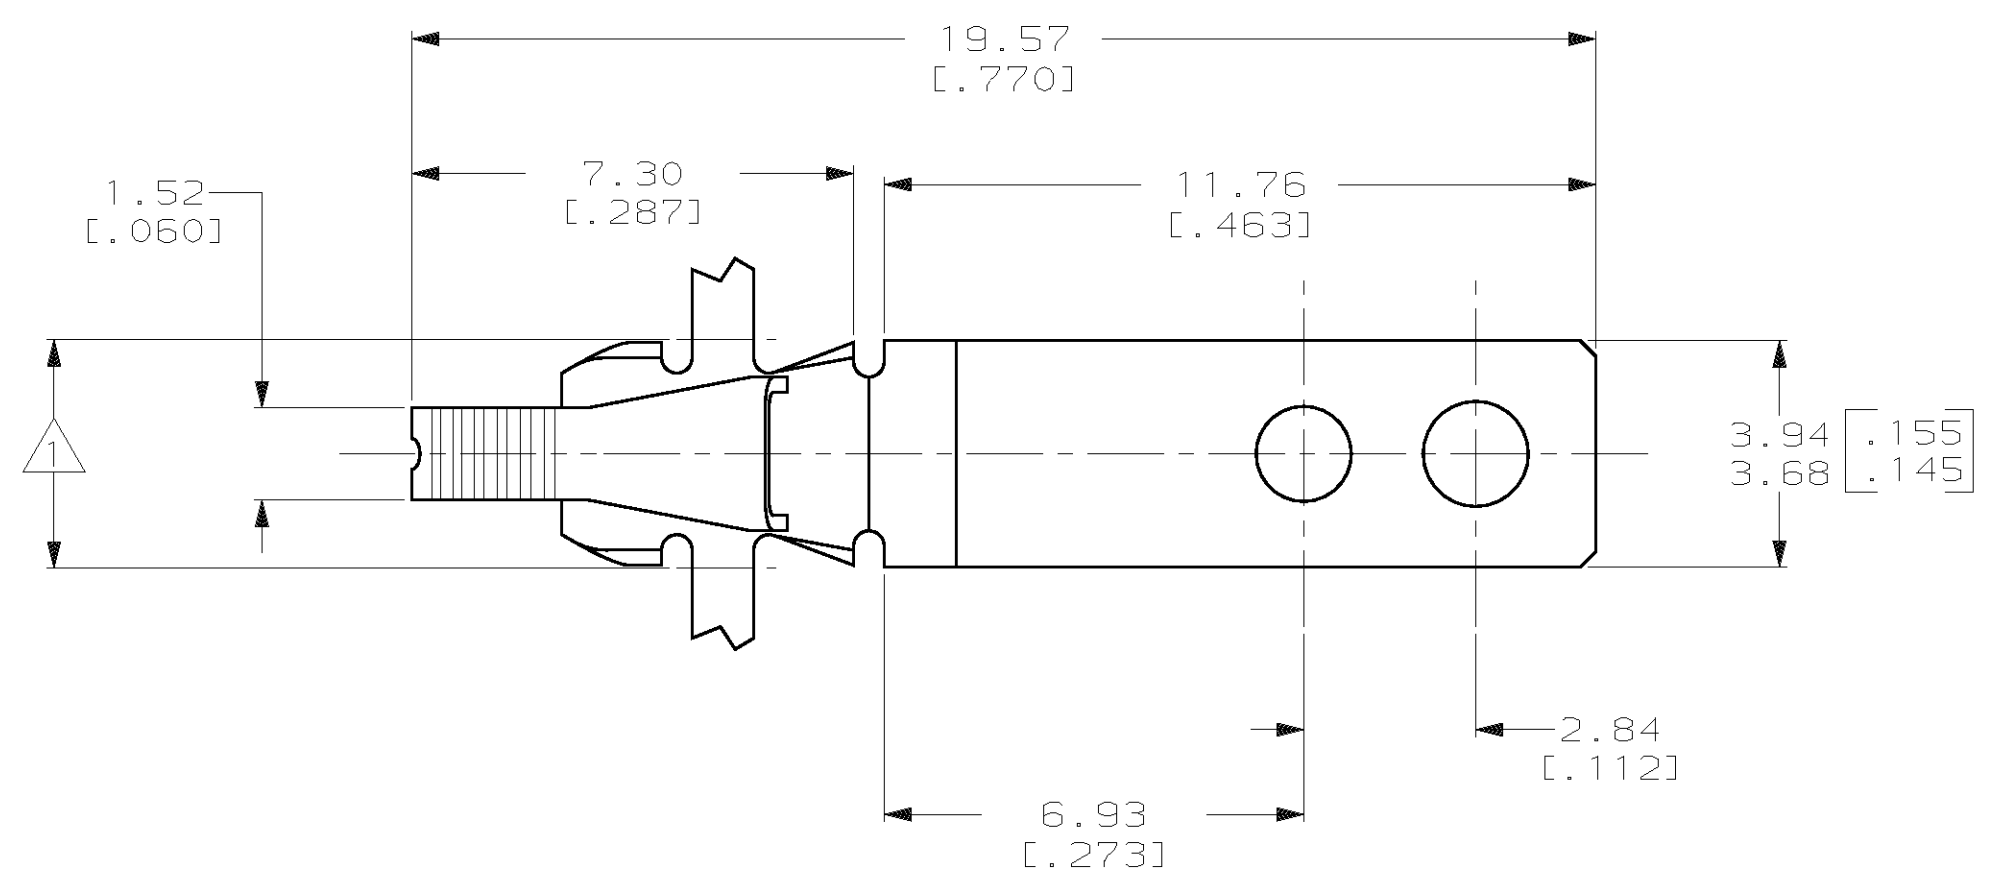
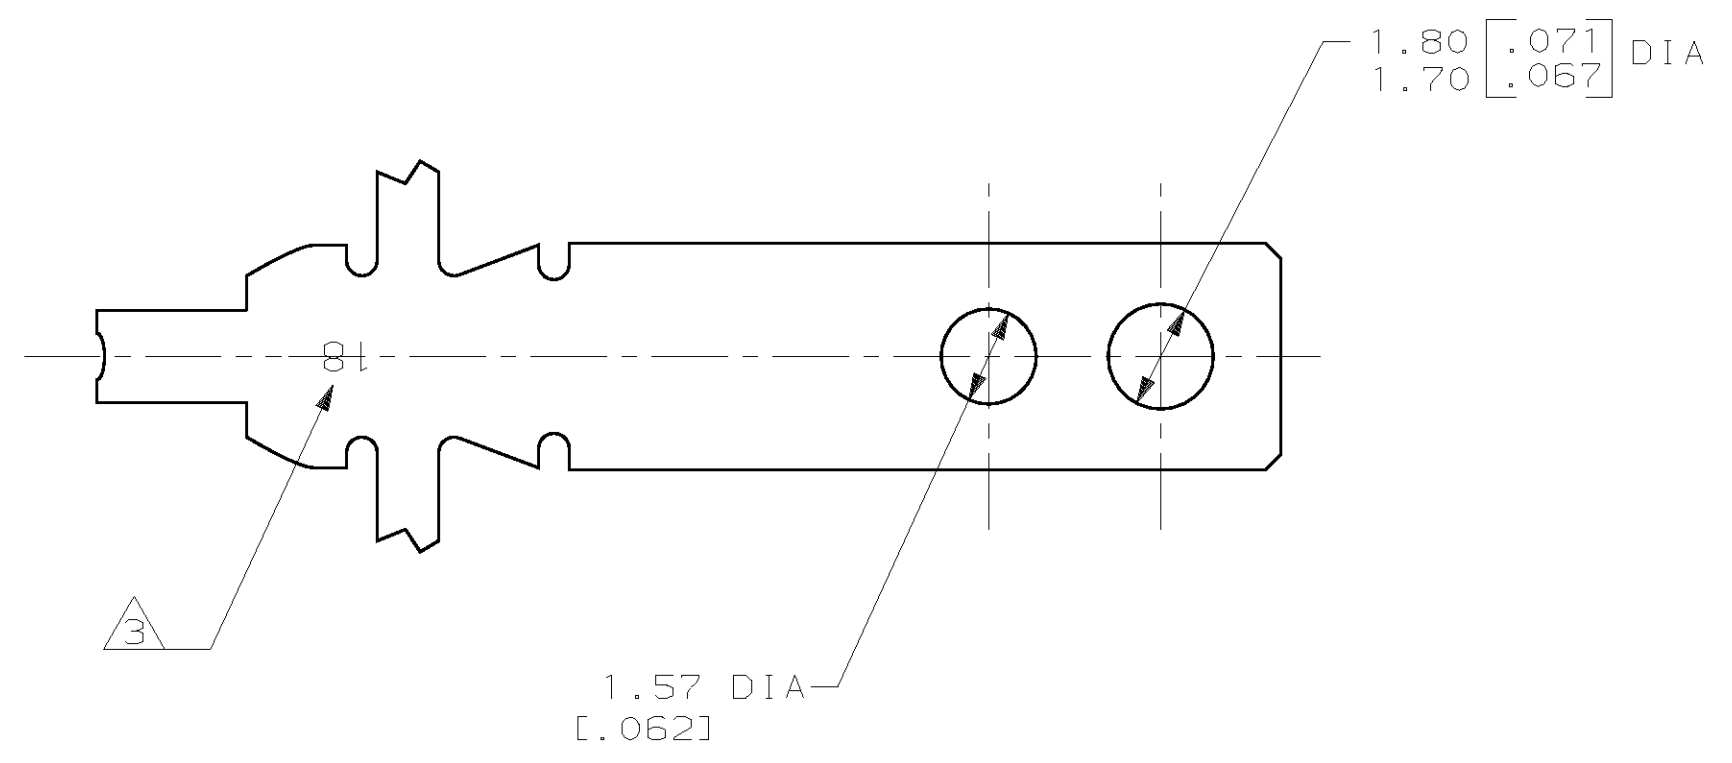


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50	B	REVISED MATERIAL PER 0L10-0451-97	19NOV97	MF NN

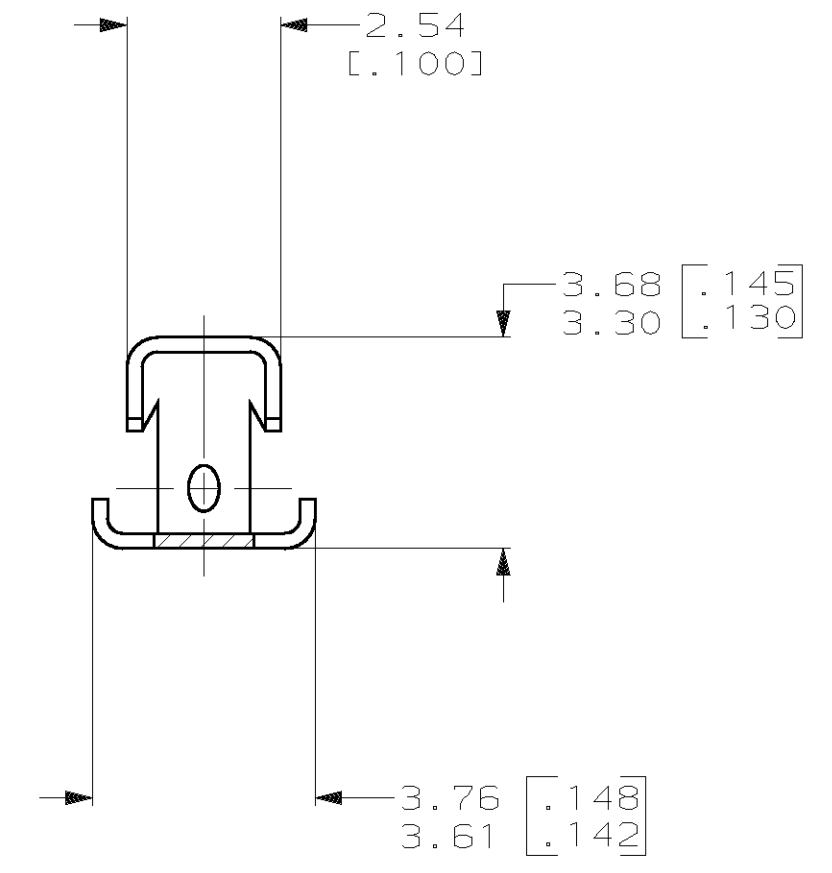

- 1 3.78 [.149] MAX APPLICATOR CUT-OFF.
- 2 CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 6.10±0.08 [.240±.003] CENTERS.
- 3 IDENTIFICATION NUMBER 18 FOR MAGNET WIRE RANGE.
- 4 0.002032 [.000080] MIN TIN PER MIL-T-10727 OVER 0.00127 [.000050] MIN NICKEL UNDERPLATE PER 112-25-2.

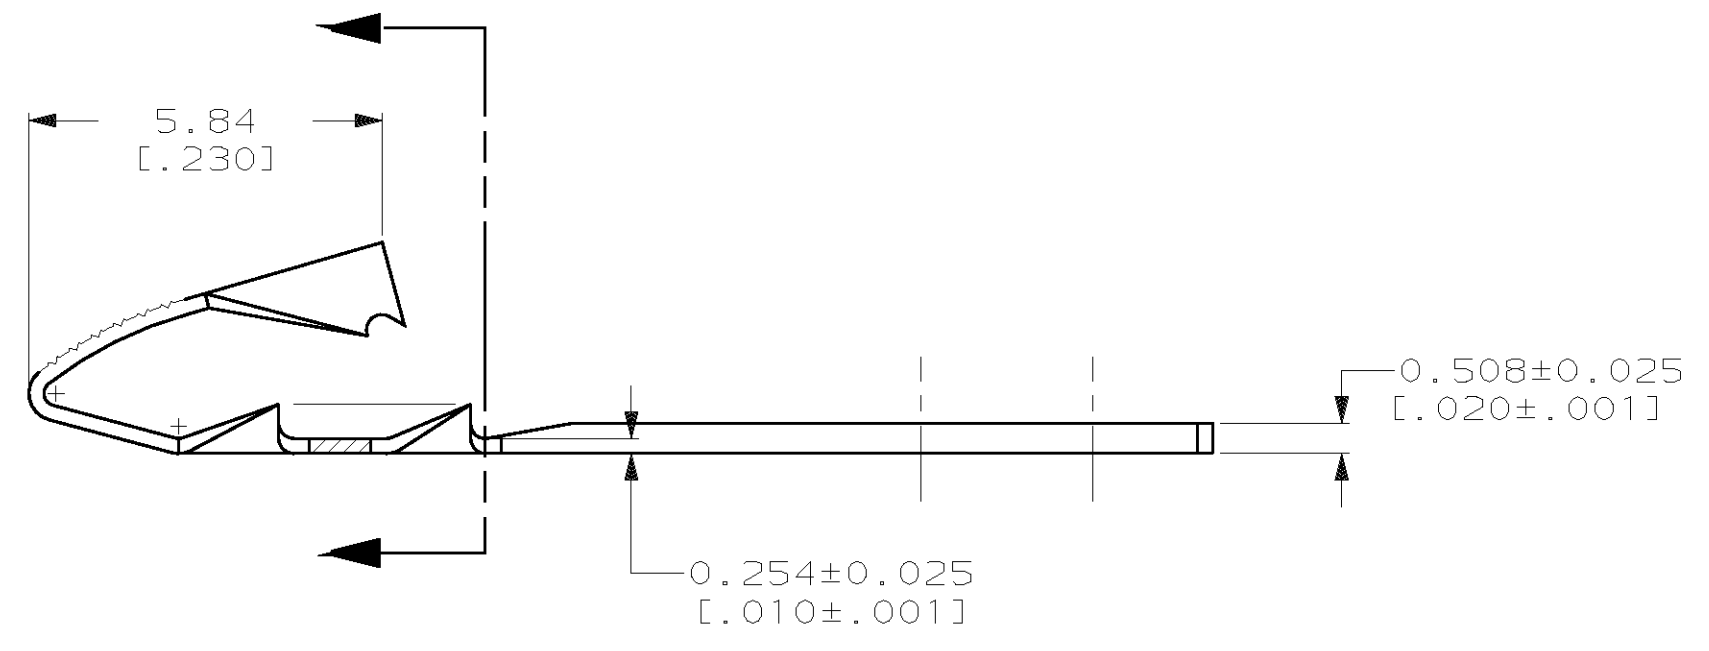

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN MICHAEL S. FEHER	0.10-0.25mm [#38-#30] AWG		63956-1
DIMENSIONS: mm [INCHES]		CHK RICHARD GRZYBOWSKI	COPPER MAGNET WIRE RANGE		PART NUMBER
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD NELSON E. NEFF	AMP Incorporated Harrisburg, PA 17105-3608		
0 PLC ±-		PRODUCT SPEC	TAB, MINI MAG-MATE™		
1 PLC ±-		APPLICATION SPEC	108-2016		
2 PLC ±0.25 [.010]		WEIGHT	-		
3 PLC ±-		CUSTOMER DRAWING	A2 00779 C-63956		
4 PLC ±-		SCALE	8:1		
ANGLES ±-		SHEET	1 OF 1		
FINISH		REV	B		
MATERIAL H04 PRE-MILLED PHOS. BRONZE					