

# Relay Module - RIF-0-RSC-12DC/ 1 - 2903367


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Pre-assembled relay module with screw connection, consisting of: relay base with ejector and power contact relay. Contact type: 1 N/O contact. Input voltage: 12 V DC



## Key Commercial Data

|              |   |
|--------------|---|
| Packing unit | 10 STK  |
| GTIN         | <br>4 046356 732956 |
| GTIN         | 4046356732956   |

## Technical data

### Note

|                         |   |
|-------------------------|---|
| Utilization restriction | EMC: class A product, see manufacturer's declaration in the download area |
|-------------------------|---|

### Dimensions

|        |        |
|--------|--------|
| Width  | 6.2 mm |
| Height | 84 mm  |
| Depth  | 68 mm  |

### Ambient conditions

|   |                  |
|---|------------------|
| Ambient temperature (operation)         | -40 °C ... 60 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |

### Coil side

|   |             |
|---|-------------|
| Nominal input voltage $U_N$               | 12 V DC     |
| Input voltage range in reference to $U_N$ | see diagram |
| Typical input current at $U_N$            | 16 mA       |
| Typical response time                     | 5 ms        |
| Typical release time                      | 8 ms        |
| Coil voltage                              | 12 V DC     |

# Relay Module - RIF-0-RSC-12DC/ 1 - 2903367

## Technical data

### Coil side

|   |               |
|---|---------------|
| Protective circuit                      | Damping diode |
| Operating voltage display               | Yellow LED    |
| Power dissipation for nominal condition | 0.19 W        |

### Contact side

|  |                        |
|--|------------------------|
| Contact type   | 1 N/O contact          |
| Type of switch contact                                 | Single contact         |
| Contact material                                       | AgSnO                  |
| Maximum switching voltage                              | 250 V AC/DC            |
| Minimum switching voltage                              | 5 V (at 100 mA)        |
| Min. switching current                                 | 10 mA (at 12 V)        |
| Maximum inrush current                                 | 10 A (4 s)             |
| Limiting continuous current                            | 6 A                    |
| Interrupting rating (ohmic load) max.                  | 140 W (at 24 V DC)     |
|  | 20 W (at 48 V DC)      |
|  | 18 W (at 60 V DC)      |
|  | 23 W (at 110 V DC)     |
|  | 40 W (at 220 V DC)     |
|  | 1500 VA (for 250 V AC) |
| Switching capacity in acc. with DIN VDE 0660/IEC 60947 | 1 A (at 24 V, DC13)    |
|  | 0.2 A (at 110 V, DC13) |
|  | 0.1 A (at 220 V, DC13) |
|  | 3 A (at 24 V, AC15)    |
|  | 3 A (at 120 V, AC15)   |
|  | 3 A (at 230 V, AC15)   |

### Connection data input side

|   |   |
|---|---|
| Connection name   | Coil side   |
| Connection method   | Screw connection  |
| Stripping length  | 7 mm  |
| Conductor cross section solid   | 0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>                                     |
| Conductor cross-section solid (2 conductors with same cross section)    | 0.5 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>                                   |
| Conductor cross section flexible  | 0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>                                   |
|   | 0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> (Ferrules without plastic sleeve) |
|   | 0.5 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> (Ferrule with plastic sleeve)     |
| Conductor cross section flexible (2 conductors with same cross section) | 0.5 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>                                   |
|   | 0.5 mm <sup>2</sup> ... 1 mm <sup>2</sup> (TWIN ferrule with plastic sleeve)  |
| Conductor cross section AWG   | 20 ... 12 (solid)   |
|   | 20 ... 14 (flexible)  |
| Torque  | 0.5 Nm ... 0.6 Nm   |

### Connection data output side

# Relay Module - RIF-0-RSC-12DC/ 1 - 2903367

## Technical data

### Connection data output side

|   |   |
|---|---|
| Connection name   | Contact side  |
| Connection method   | Screw connection  |
| Stripping length  | 7 mm  |
| Conductor cross section solid   | 0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>                                     |
| Conductor cross-section solid (2 conductors with same cross section)    | 0.5 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>                                   |
| Conductor cross section flexible  | 0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>                                   |
|   | 0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> (Ferrules without plastic sleeve) |
|   | 0.5 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> (Ferrule with plastic sleeve)     |
| Conductor cross section flexible (2 conductors with same cross section) | 0.5 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>                                   |
|   | 0.5 mm <sup>2</sup> ... 1 mm <sup>2</sup> (TWIN ferrule with plastic sleeve)  |
| Conductor cross section AWG   | 20 ... 12 (solid)   |
|   | 20 ... 14 (flexible)  |
| Torque  | 0.5 Nm ... 0.6 Nm   |

### General

|  |                                     |
|--|-------------------------------------|
| Test voltage relay winding/relay contact | 4 kV <sub>rms</sub> (50 Hz, 1 min.) |
| Operating mode                           | 100% operating factor               |
| Degree of protection                     | IP20 (Relay base)                   |
|  | RT III (Relay)                      |
| Mechanical service life                  | approx. 2x 10 <sup>7</sup> cycles   |
| Mounting position                        | any                                 |
| Assembly instructions                    | In rows with zero spacing           |

### Standards and Regulations

|  |                |
|--|----------------|
| Standards/regulations                  | DIN EN 50178   |
| Rated insulation voltage               | 250 V AC       |
| Rated surge voltage                    | 6 kV           |
| Insulation                             | safe isolation |
| Degree of pollution                    | 2              |
| Overvoltage category                   | III            |
| Flammability rating according to UL 94 | V2             |


### Environmental Product Compliance

|            |   |
|------------|---|
| REACH SVHC | Lead 7439-92-1  |
| China RoHS | Environmentally Friendly Use Period = 50  |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

## Drawings


# Relay Module - RIF-0-RSC-12DC/ 1 - 2903367

Circuit diagram




DC coils

Diagram

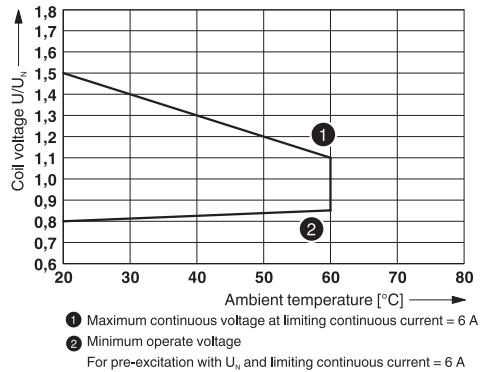


Operating voltage range

Diagram

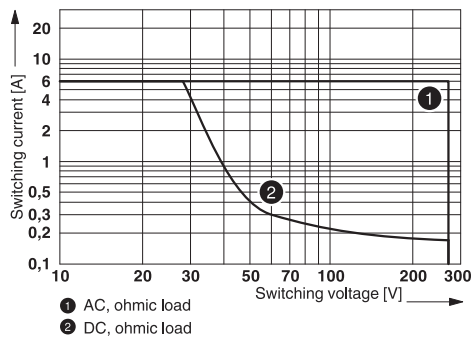


Diagram

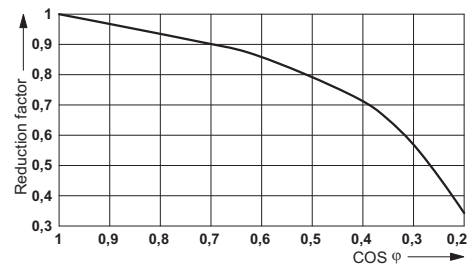

Interrupting rating

Service life reduction factor

Diagram

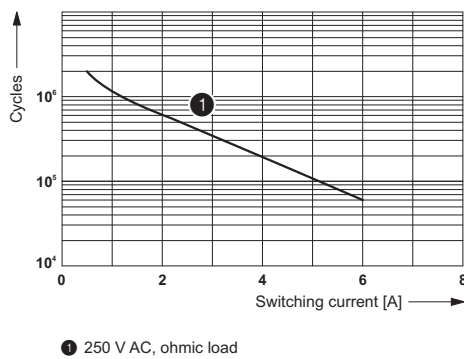

Electrical service life

# Relay Module - RIF-0-RSC-12DC/ 1 - 2903367

## Articles in set

Single relay - REL-MR- 12DC/21 - 2961150



Plug-in miniature power relay, with power contact, 1 PDT, input voltage 12 V DC

Relay base - RIF-0-BSC/ 1 - 2901872



RIF-0... relay base, for miniature power relay with 1 N/O contact or identical solid-state relays, screw connection, for mounting on NS 35/7,5

## Approvals

### Approvals

Approvals

DNV GL / EAC

Ex Approvals

### Approval details

|        |   |            |
|--------|---|------------|
| DNV GL | <a href="http://exchange.dnv.com/tari/">http://exchange.dnv.com/tari/</a> | TAA000018V |
|--------|---|------------|

|     |  |                          |
|-----|--|--------------------------|
| EAC |  | RU C-<br>DE.A*30.B.01082 |
|-----|--|--------------------------|

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>