


REVISIONS				
EC NO	DATE	REV	DESCRIPTION	CHANGER
	13.07.26	A	INITIAL RELEASE.	Andrew

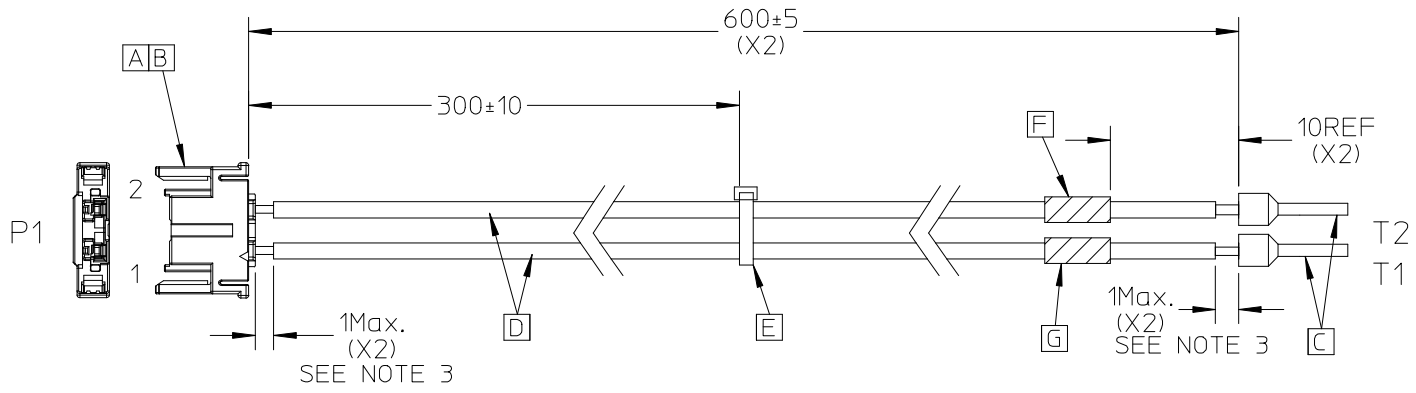

NOTES  
 1. THIS PRODUCT MUST MEET EU 2002/95 EC ROHS COMPLIANCE.  
 2. ELECTRICAL PERFORMANCE REFER TO ES-000.  
 3. THE INNER INSULATION EXPOSED LENGTH.

G	HST 2.0mm RED	10REF	1
F	HST 2.0mm BLACK	10REF	1
E	CABLE TIE		1
D	WIRE UL11047 24AWG DOUBLE INSULATION WHITE	A/R	
C	FERRULE END TERMINAL 24AWG		2
B	TERMINAL 24AWG		2
A	HSG 2CKT WHITE		1
ITEM	DESCRIPTION	L(MM)	Q'TY

WIRING CHART			
P1		WIRE COLOR	HST COLOR
1	T1	WHITE	RED
2	T2	WHITE	BLACK

EC NO: CPG2014-0268 DRWN: JXIA004 CHKD: YXZOU APPR: FNIE	2013/07/27 2013/07/27 2013/07/29	QUALITY SYMBOLS $\nabla_F = 0$ $\nabla_E = 0$ $\nabla_B = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
					DRAWN BY JXIA004	DATE 2013/07/27	TITLE FLEXIMATE TO FERRULE 600MM			
					CHECKED BY YXZOU	DATE 2013/07/27				
					APPROVED BY FNIE	DATE 2013/07/29				
A	REV	ANGULAR $\pm$ --- °		MATERIAL NO. 688014648		DOCUMENT NO. SD-68801-104		SHEET NO. 1 OF 1		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A/4	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					