

SUMMARY

Wires

Low	0
High	1
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

Series	1S
Termination type	HV contact
IP rating	50
Cable Ø	5.20 - 5.70 mm
Matching parts	ERA.1S.405.CLL
Status	NRND
Alternative part	FFB.1S.405.CLAC62

TECHNICAL DETAILS

Mechanics

Shell Style/Model	FFB*: Straight plug, cable collet and safety locking ring
Keying	
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	C57: 5.2 - 5.7 mm
Variant	

Performance

Configuration	1S.405 : 1 High Voltage
Insulator	L: PEEK (UL 94 / V-0/3.2, depends on material thickness)
Rated Current	8 Amps

Specifications


Contact Type:	Solder
Test voltage (kV DC)	10.5
Test voltage (kV AC)	7.5
Creepage dist.(mm):	10.5

Others

Endurance (Shell): 5000 mating cycles
Temp (min / max): -55°C / +250°C
Humidity (max): <=95% [at 60 deg C / 140 F]
Vibration: 15 g [10 Hz - 2000 Hz]
Shock Resistance: 100 g [6 ms]
Salt Spray Corrosion: >144 hr
Climatical Category: 50/175/21
Shielding (min): 75 dB (10 MHz)
Shielding (min): 40 dB (1 GHz)
IP Rating: 50

DRAWINGS

Draws

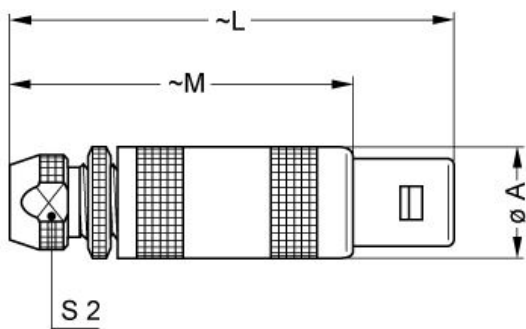

Dimensions

	A	L	M	S2
mm.	12	45	34	8.5
in.	0,47	1,77	1,34	0,33

RECOMMENDED BY LEMO

Tools

Spanner wrench: DCD.1S.015.PA085

Cables