

13 12 11 10 9 8 7 6 5 4 3 2 1

J

I

H

G

F

E

D

C

B

A

J

I

H

G

F



E

D


C

B


A

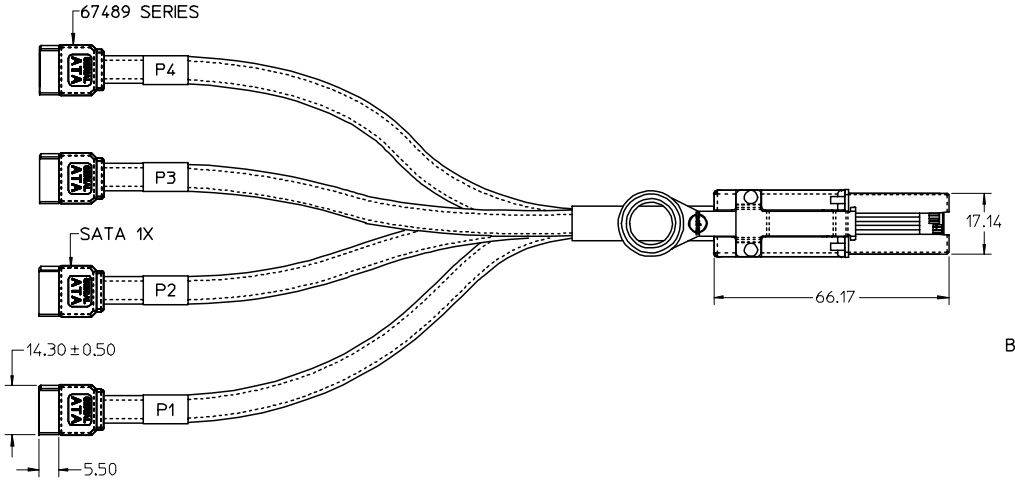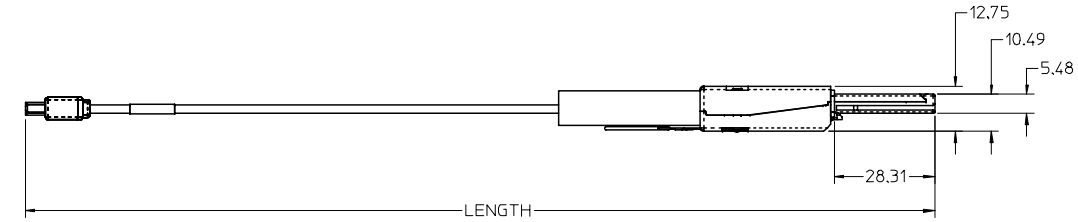

SATA 1X



I-PASS 26 CKT EXTERNAL

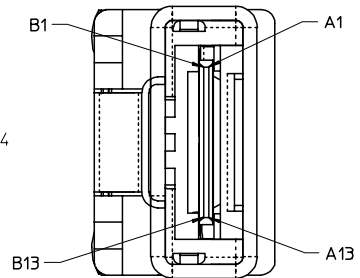

HOST BASED IPASS			TARGET BASED SATA				PIN OUT 2																						
SAS 26 CKT EXTERNAL	SIGNAL DESC	SIGNAL DESC	SATA X1				SATA X1																						
B4	B2	B3	NC	A2	A3	A4	B7	B5	B6	NC	A5	A6	A7	B10	B8	B9	NC	A8	A9	A10	B13	B11	B12	NC	A11	A12	A13		
			P1	P2	P3	P4	S1	S3	S2	S4	S6	S5	S7	S1	S3	S2	S3	S4	S6	S5	S7	S1	S3	S2	S3	S4	S6	S5	S7

P/N	DESC	LENGTH	PINOUT
745571001	SAS 26 CKT TO SATA 1X	0.5M	PINOUT 1
745571002	SAS 26 CKT TO SATA 1X	1M	PINOUT 1
745571003	SAS 26 CKT TO SATA 1X	0.5M	PINOUT 2
745571004	SAS 26 CKT TO SATA 1X	1M	PINOUT 2

- NOTES:
1. LENGTH- SEE TABLE
 2. ELECTRICAL PERFORMANCE PER SERIAL ATTACH SCSI
 3. THIS PRODUCT MEETS THE RESTRICTION OF HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT (RoHS) DIRECTIVE (2002/95/EC).
 4. SATA 1X MATES WITH:
RIGHT ANGLE: 67490-9220/9221/0220/0221
VERTICAL: 67491-0010/0011/0030/0031
 5. I-PASS 4X EXTERNAL (UNIVERSAL KEY) MATES WITH:
RECEPTICAL: 75586-0004
EMI GUIDE HOUSING ASSEMBLY: 74548-0103 TO 0111, 74548-0203 TO 0211

ENTER DESCRIPTION EC NO: USY2008-0083 DRAWN: JERWIN 2007/10/12 CHKD: DOOYE 2007/10/17 APPR: DOOYE 2007/10/17 REV:	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		4 PLACES ± --- ± ---	3 PLACES ± --- ± ---	2 PLACES ± 0.13 ± ---	1 PLACE ± 0.25 ± ---	APPROVED BY DOOYE 2006/04/11		MATERIAL NO. SD-74557-110	
		ANGULAR ±1/2°				DRAWN BY JERWIN 2006/04/11		CHECKED BY THALL 2006/04/11	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SIZE SEE TABLE		DOCUMENT NO. SD-74557-110	

MOLEX INCORPORATED

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

12 11 10 9 8 7 6 5 4 3 2 1