т	۵	н п	 D	0







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 13

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	_∶ -65°C to +175°C			
-Salt Spray	: 500 hours			

: 16.46 g ± 10%

8D 0

G

13

W

26

А

F

В

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M18x1-6g		


ORIENTATION : B


D

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 13-26



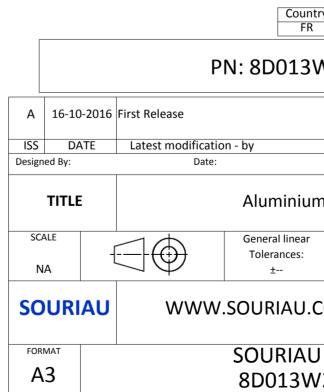

С

Φ			
		4	
S EXAMPLE		3	
any non-conformit which does not co or of the Parties or b idation, technical n intry Jurisd R 3W26AB	mply with by a third party	2	
	MOD N	<u>, </u>	
	CUSTOMER DRAWING		
um Receptacle 8D series			
ar	NPRDS / PROJECT		
	859 This document is the property of	1	
.COM SOURIAU it must not be reproduced or communicated without permission			
U DRG N° SHEET			
W26AB-C	1/2		
В	A		

-	Ŧ	۵	п п	m		0
		Contact Layout				Panel Cutou
4		26			۲۲ – ۲	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
		2#12 6#22D			v	
cυ	Ctc A B C D E F 1 2	13-26 X Y 0 3.47 2.47 4.34 2.47 -4.34 0 -3.47 -2.47 -4.34 -2.47 4.34 3.25 0 -3.25 0				Dim ØA ØAA R1 ØT
	F					SOURIAU shall not be liable for any
						due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						Countr FR
					A 16-10-20	PN: 8D013V
					ISS DATE Designed By:	Latest modification - by Date:
					TITLE	Aluminium
_					SCALE NA	General linear Tolerances:
					SOURIA	WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D013W
L	Н	G	F	E	D	С

