

MACPCT0030



**Broadband CATV, 16dB Coupler
5-1200 MHz**


Rev. V3

Features


- Surface mount
- Typical coupling +16dB
- 260°C reflow compatible
- RoHS compliant and Pb free
- Available on tape and reel, reel quantity 1000

Description

M/A-COM's MACPCT0030 is a 16dB broadband Coupler in a low cost, surface mount package. It offers low loss, good isolation, good input/output matching and exceptional matching in return loss. Ideally suited for high volume CATV/Broadband applications.

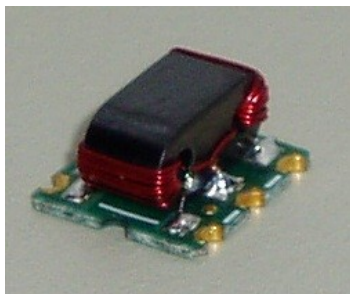

Schematic

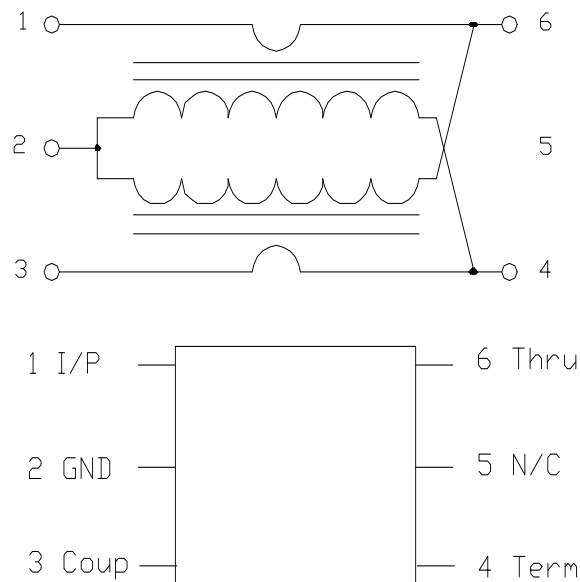


Pin Configuration

Pin No.	Function
1	Input
5	N/C
2	Ground
3	Coupled
4	Isolated (external 75 Ohms termination)
6	Output

Part Number	Package
MACPCT0030	1000 piece reel
MACP-007977-CT30TB	Test Board

Case Style: SM-123

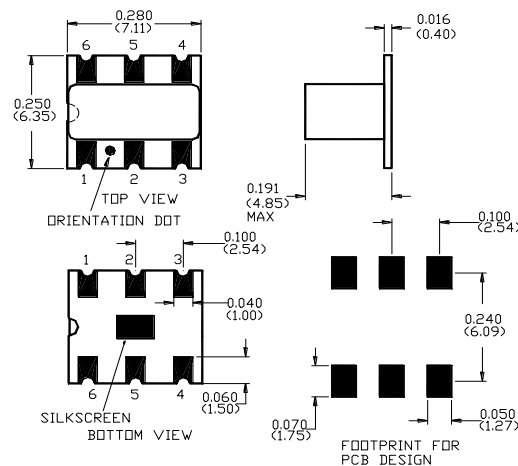

Dimensions in inches [mm] Tolerance: .xx ± .02, .xxx ± .010

Note: Reference Application Note **M513** for reel size information.

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 75\Omega$ ¹


Parameter	Test Conditions	Units	Min	Typ	Max
Coupling	5 - 40 MHz	dB	-	15.8	16.0
	40 - 1000 MHz	dB	-	16.4	17.5
	1000 - 1200 MHz	dB	-	16.8	18.5
Main Line Loss	5 - 1000 MHz	dB	-	1.0	1.25
	1000 - 1200 MHz	dB	-	1.2	1.60
Input Return Loss	5 - 40 MHz	dB	20.0	23.0	-
	40 - 1000 MHz	dB	24.0	27.0	-
	1000 - 1200 MHz	dB	22.0	28.0	-
Output Return Loss	5 - 40 MHz	dB	20.0	23.7	-
	40 - 1000MHz	dB	25.0	29.8	-
	1000 - 1200 MHz	dB	20.0	24.1	-
Isolation	5 - 1000MHz	dB	25	29.0	-
	1000 - 1200MHz	dB	23	27.0	-
Coupling Return Loss	5 - 1000MHz	dB	20.0	22.3	-
	1000 - 1200 MHz	dB	16.0	22.0	-

Absolute Maximum Ratings ^{1,2}

Parameter	Absolute Maximum
Max Input Power	250mW
DC current	30mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C


1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. M/A-COM does not recommend sustained operation near these survivability limits.

Recommended PCB Configuration

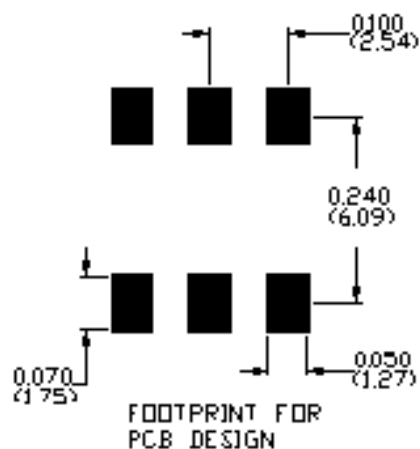


Typical Performance Curves $T_A = 25^\circ\text{C}$, $Z_0 =$


Coupling

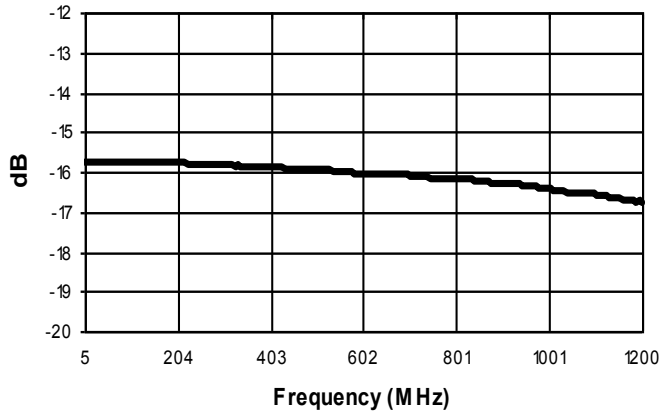


Main Line Loss

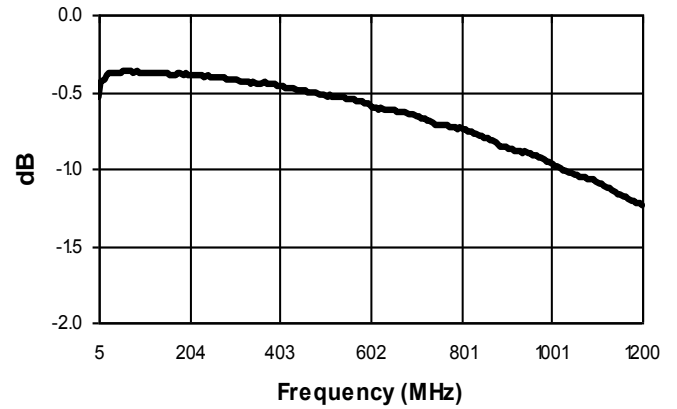


Output Return Loss

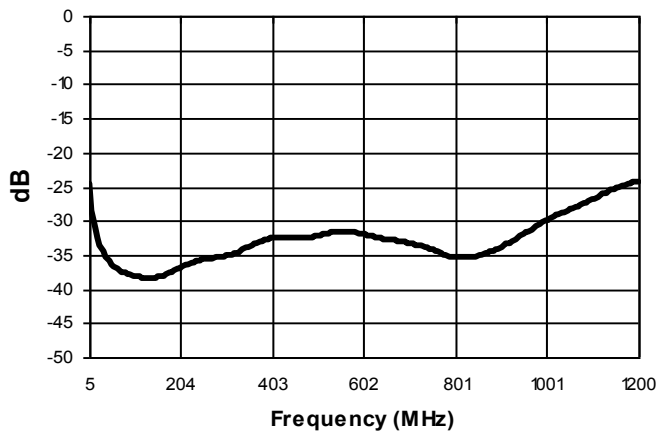


Input Return Loss

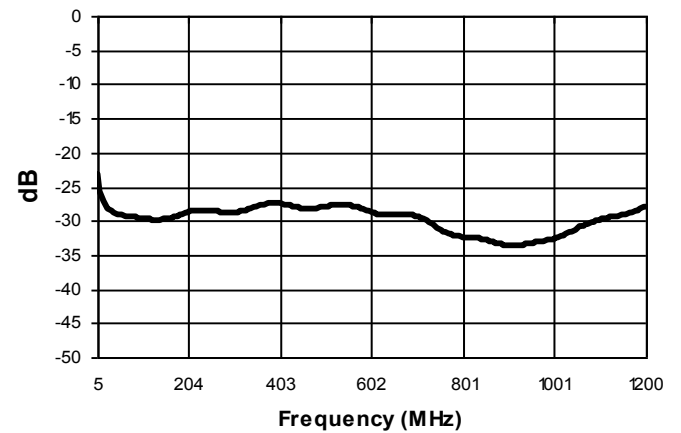

Coupling Return Loss

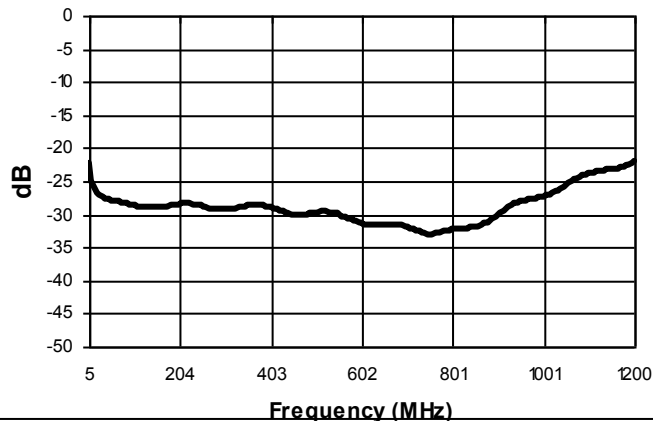

Isolation

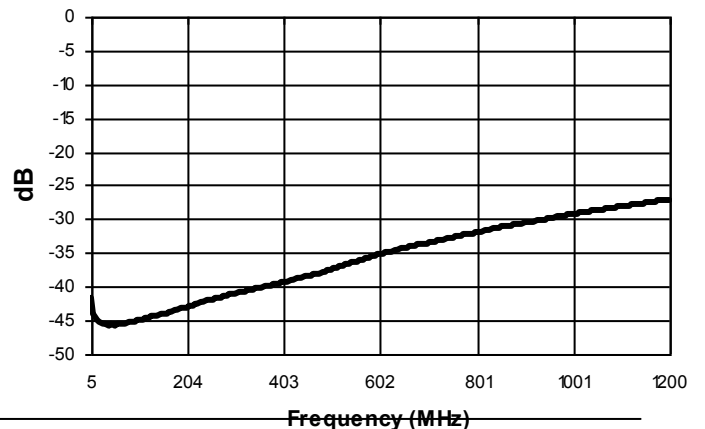

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.