


Specification Sheet

Part Number: 132-00008

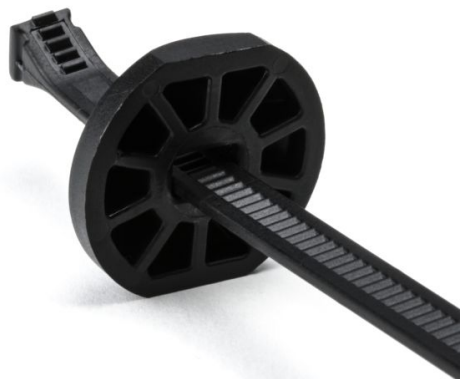

Button Head Cable Tie with Retainers and Pilot Bushings, 10.5" Long, PA66HIRHSUV, Black, 50/pkg

| | |
|---------------------|--|
| Article Number | 132-00008 |
| Type | BT130RDP |
| Color | Black (BK) |
| Features & Benefits | <ul style="list-style-type: none">• Unique two piece tie allows parallel entry and exit through the head for easy assembly.• High impact, heat stabilized material gives strength needed for trucking and heavy equipment applications. |
| Quantity Per | bag |

Product Description

The button head tie is a two piece tie providing for parallel entry and exit through the head. The strap contains serrations on both sides, and has two opposed pawls recessed within a domed head. This design allows the strap to be directed clockwise or counter-clockwise prior to insertion into the head, enabling bi-directional looping.

| | |
|--|---|
| Short Description | Button Head Cable Tie with Retainers and Pilot Bushings, 10.5" Long, PA66HIRHSUV, Black, 50/pkg |
| Global Part Name | BT130RDP-PA66HIRHSUV-BK |
| Minimum Tensile Strength (Imperial) | 130 |
| Minimum Tensile Strength (Metric) | 578 |
| Length L (Imperial) | 10.5 |
| Length L (Metric) | 267.0 |
| Fixation Method | Connector Clip |
| Identification Plate Position | none |
| Releasable Closure | No |
| Tie Closure | plastic pawl |
| Variant | Outside Serrated |
| Width W (Imperial) | 0.3 |
| Width W (Metric) | 7.6 |
| Bundle Diameter Min (Imperial) | 0.06 |
| Bundle Diameter Min (Metric) | 1.5 |
| Bundle Diameter Max (Imperial) | 2.9 |

| | |
|---------------------------------------|--|
| Bundle Diameter Max (Metric) | 73.0 |
| Material | Polyamide 6.6 high impact modified, heat and UV stabilized (PA66HIRHSUV) |
| Material Shortcut | PA66HIRHSUV |
| Material Head | Polyamide 6.6 heat stabilized (PA66HS) |
| Flammability | UL 94 HB |
| Operating Temperature (Metric) | -40°F to +185°F (-40°C to +85°C) |
| Package Quantity(Imperial) | 50 |
| Package Quantity (Metric) | 50 |
| Customs Number | 3926909987 |