

APPLICABLE STANDARD				
RATING	OPERATING TEMPERATURE RANGE	-30°C TO +70°C	STORAGE TEMPERATURE RANGE	- °C TO - °C
	VOLTAGE	AC 125 V	CURRENT	0.5A


SPECIFICATIONS

ITEM	TEST METHOD	REQUIREMENTS	QT	AT
------	-------------	--------------	----	----

CONSTRUCTION

GENERAL EXAMINATION	VISUALLY AND BY MEASURING INSTRUMENT.	ACCORDING TO DRAWING.	X	X
MARKING	CONFIRMED VISUALLY.		X	X

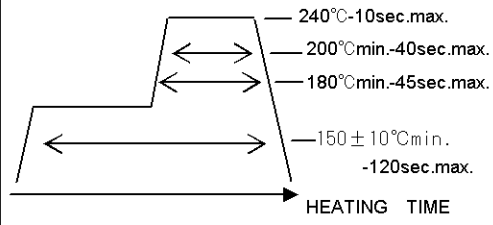
ELECTRICAL CHARACTERISTICS

CONTACT RESISTANCE	1 mA MAX (DC OR 1000 Hz).	40 mΩ MAX. 	X	—
INSULATION RESISTANCE	100 V DC.	250 MΩ MIN.	X	—
VOLTAGE PROOF	300 V AC FOR 1 min.	NO FLASHOVER OR BREAKDOWN.	X	X


MECHANICAL CHARACTERISTICS

INSERTION AND WITHDRAWAL FORCES	MEASURED BY APPLICABLE CONNECTOR. (WITHOUT LOCK.)	INSERTION FORCE 40 N MAX.	X	—
		WITHDRAWAL FORCE 4 N MIN.	X	—
MECHANICAL OPERATION	3000 TIMES INSERTIONS AND EXTRACTIONS.	1) CONTACT RESISTANCE : 60 mΩ MAX. 2) NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	X	—
VIBRATION	FREQUENCY 10 TO 55 Hz HALF AMPLITUDE 0.75 mm, ACCELERATION - m/s ² , AT 2 hours FOR 3 DIRECTIONS.	1) NO ELECTRICAL DISCONTINUITY OF 5μs. 2) NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	X	—
SHOCK	ACCELERATION 490 m/s ² , DURATION OF PULSE 11 ms AT 3 TIMES FOR 6 DIRECTIONS.		X	—
LOCKING FORCE	BE TO COMBINE THE APPLICABLE CONNECTORS, TO PULL THE PLUG IN WITHDRAWAL DIRECTION WITH 40N.	1) NO WITHDRAWAL. 2) NO DAMAGE IN PORTION OF THE LOCK.	X	—

ENVIRONMENTAL CHARACTERISTICS

RAPID CHANGE OF TEMPERATURE	TEMPERATURE -55 → -55 TO 35 → +85 → 5 TO 35 °C TIME 30 → 2 TO 3 → 30 → 2 TO 3 min. UNDER 5 CYCLES.	NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	X	—
DAMP HEAT (STEADY STATE)	EXPOSED AT 60 °C, 90 TO 95 %RH, FOR 96 hours.	1) INSULATION RESISTANCE: 1 MΩ MIN. (AT HIGH HUMIDITY.) 2) INSULATION RESISTANCE: 100 MΩ MIN. (AFTER DRY.) 3) NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	X	—
CORROSION SALT MIST	EXPOSED IN 5 % SALT WATER , FOR 48 hours.	NO SPECTACULAR CORRODE.	X	—
SOLDERBILITY	TEMPERATURE : 235 ± 5 °C IMMERSSIONAL TIME : 2 ± 0.5 sec.	SOLDERING POINT OF CONTACTS IMMERSSION IN SOLDER 95% MIN.	X	—
SOLDERING CONDITION (REFLOW)	REFLOW TO THE REFLOW TEMPERATURE PROFILE IN THE FIGURE-1 FOR 2 TIMES. 	NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	X	—

COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
△				

REMARK  WITHOUT BULK RESISTANCE.	APPROVED	AO.SUZUKI	06.10.03
	CHECKED	NF.MIYAZAKI	06.10.03
	DESIGNED	HS.KIKUCHI	06.10.03
	DRAWN	HS.KIKUCHI	06.10.03

Unless otherwise specified, refer to JIS C 5402.

Note QT:Qualification Test AT:Assurance Test X:Applicable Test	DRAWING NO.	ELC4-045930-02
--	-------------	----------------

HRS	SPECIFICATION SHEET	PART NO.	3260-8S1 (55)	
	HIROSE ELECTRIC CO., LTD.	CODE NO.	CL232-0002-7-55	△ 1/1