



- NOTE
- ① THIS PRODUCT IS PACKAGED IN TRAY. (35pcs/TRAY)
  - ② BLEMISH AND HIT MARK CAN BE OCCURED THROUGH OUT THE MANUFACTURING PROCESS WHICH DOESN'T AFFECT QUALITY LEVEL. ALSO, BLACK SPOT COULD BE OBSERVED ON THE SURFACE OF HOUSING.
  - ③ FOR THE CONTACT NO., ADJACENT TWO PAIRS OF LEADS PLACED BACK-TO-BACK (4 LEADS IN TOTAL) COMPOSE ONE LINE.
  - ④ MISALIGNMENT ABSORBING RANGE: ±0.3mm max.
  - ⑤ THE DIMENSION IN PARENTHESES ARE FOR REFERENCES.
  - ⑥ LOT NO. IS INDICATED AT EITHER ONE OF THE POSITION AS SHOWN.

2	COPPER ALLOY	CONTACT AREA:GOLD-PLATING 0.1 μm	4	POLYSTYRENE			
		LEAD AREA:TIN-PLATING 1.0 μm					
		UNDER PLATING:NICKEL 1.0 μm	3	PHOSPHOR BRONZE	TIN-PLATING 3.0 μm		
1	POLYAMIDE	BLACK UL94V-0			UNDER PLATING:NICKEL 1.0 μm		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	13. 03. 13	DRAWING NO.	EDC3-347261-00		
		CHECED : KI. HIROKAWA	13. 03. 12	PART NO.	FX30B-4P-3. 81DSA25		
		DESIGNED : DK. AIMOTO	13. 03. 11	CODE NO.	CL570-3202-3-00		
		DRAWN : DK. AIMOTO	13. 03. 11				

RECOMMENDED HOLE PATTERN DIMENSION OF PCB(5:1)  
 (CONNECTOR MOUNTING SIDE, PCB THICKNESS: t=1.6mm)

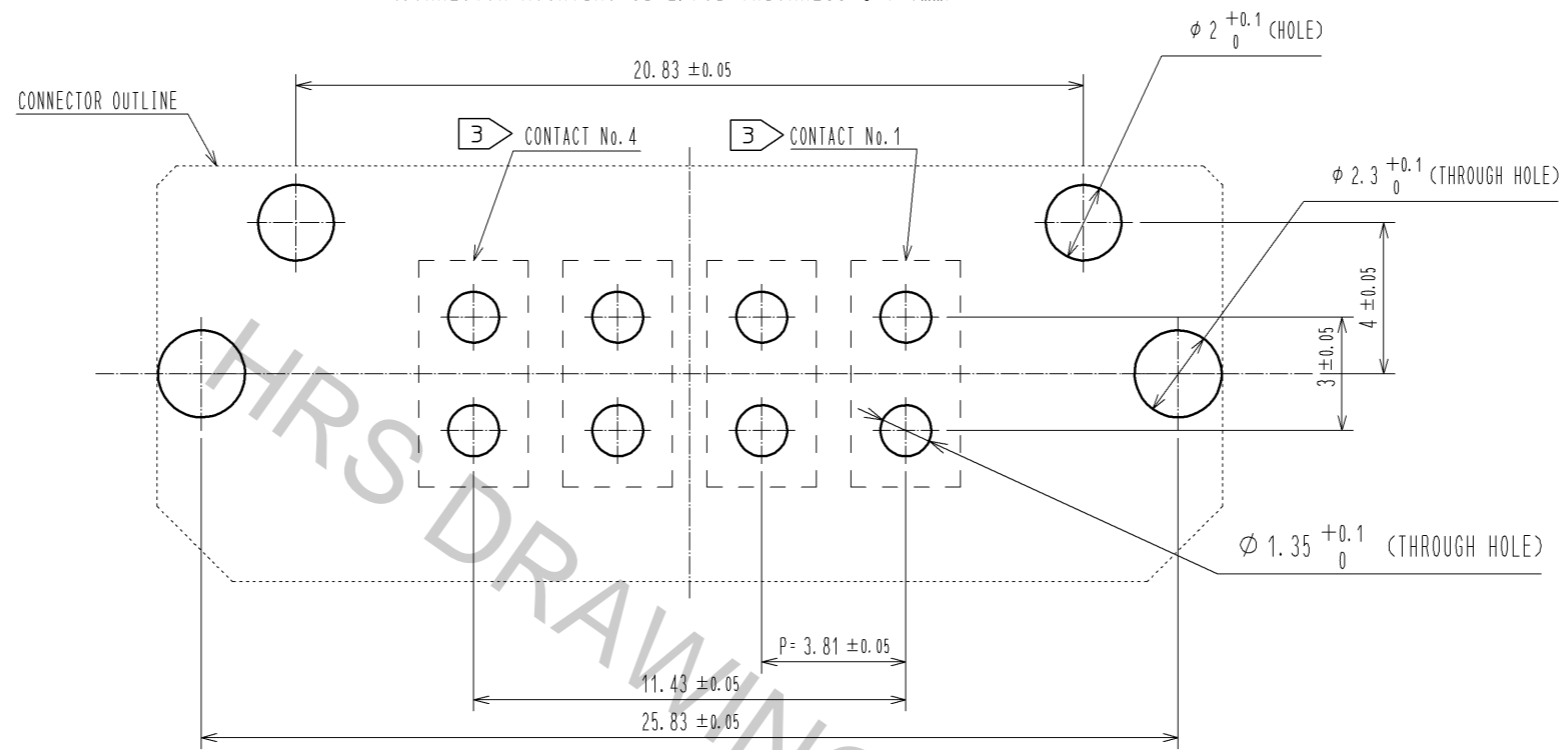

1 DRAWING FOR PACKAGING(1:2)

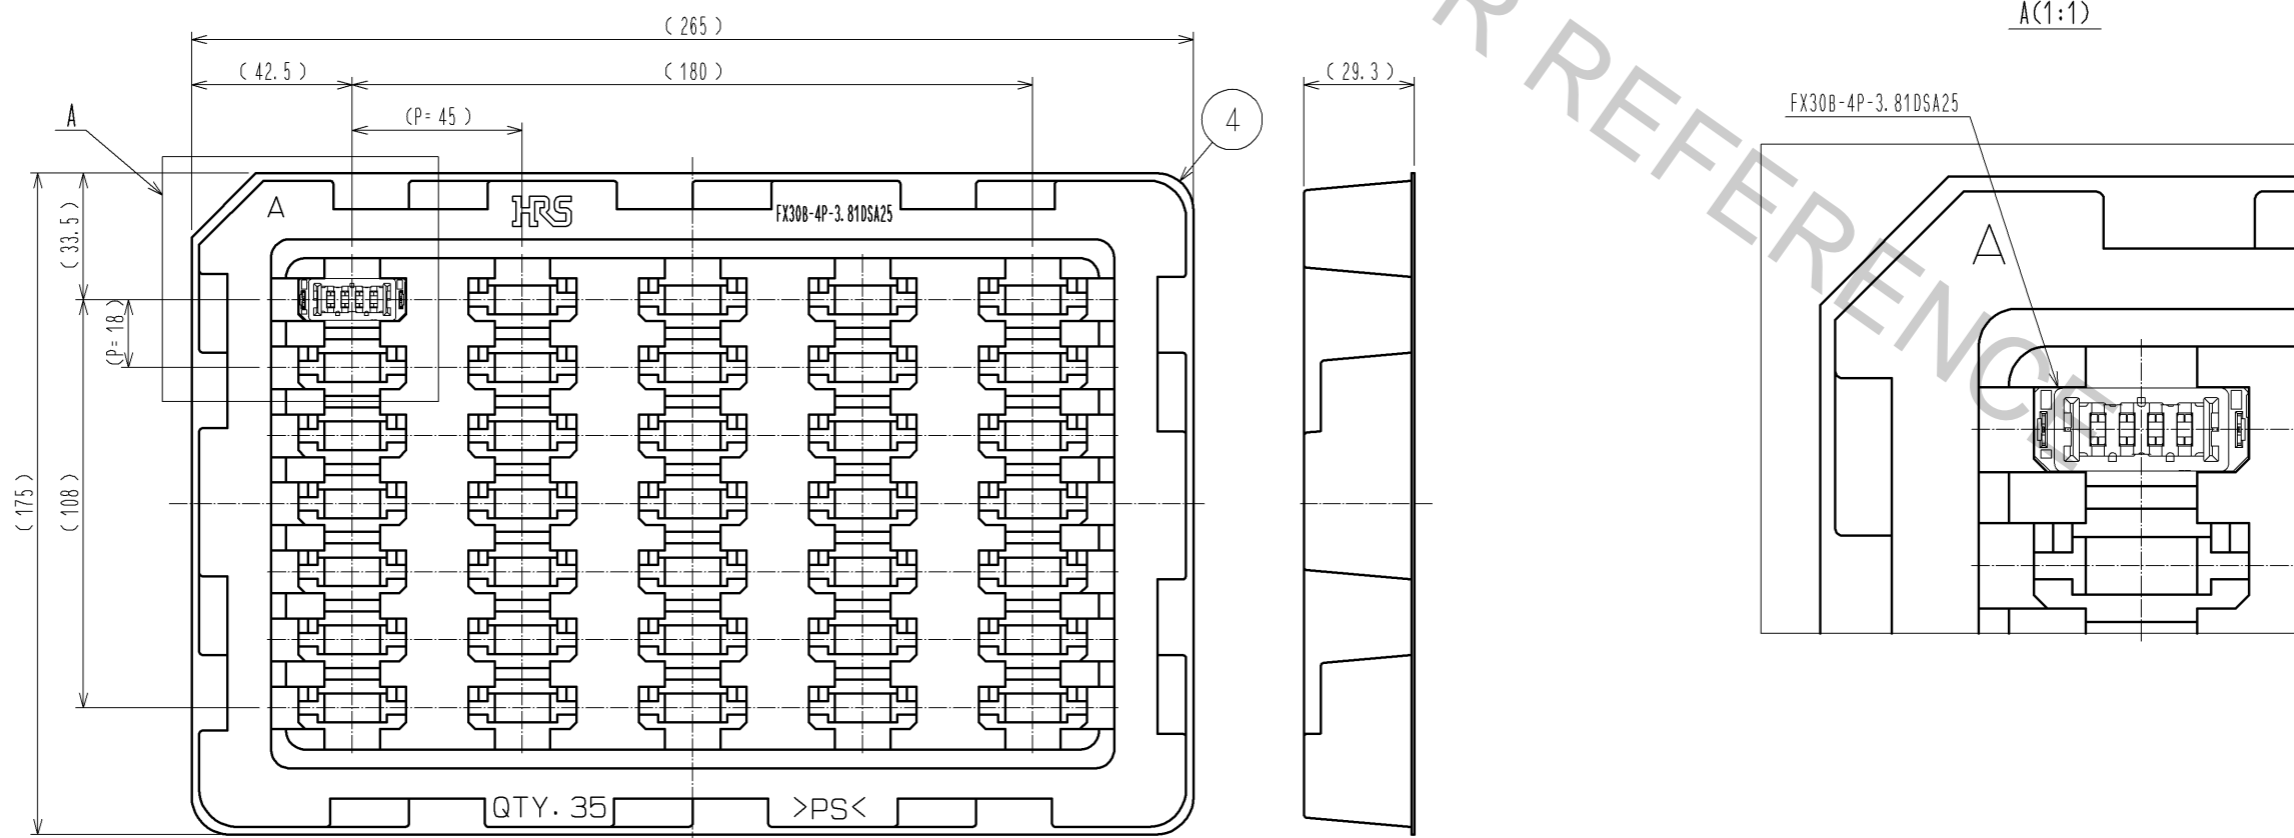

<b>HRS</b>	DRAWING NO.	EDC3-347261-00	
	PART NO.	FX30B-4P-3.81DSA25	
	CODE NO.	CL570-3202-3-00	