THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION – –, .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
CM	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C1	REVISED PER ECO–11–005027	11MAR11	RK	HMR
	D	REVISED PERECR–14–015945	26OCT14	A.Z	D.Z

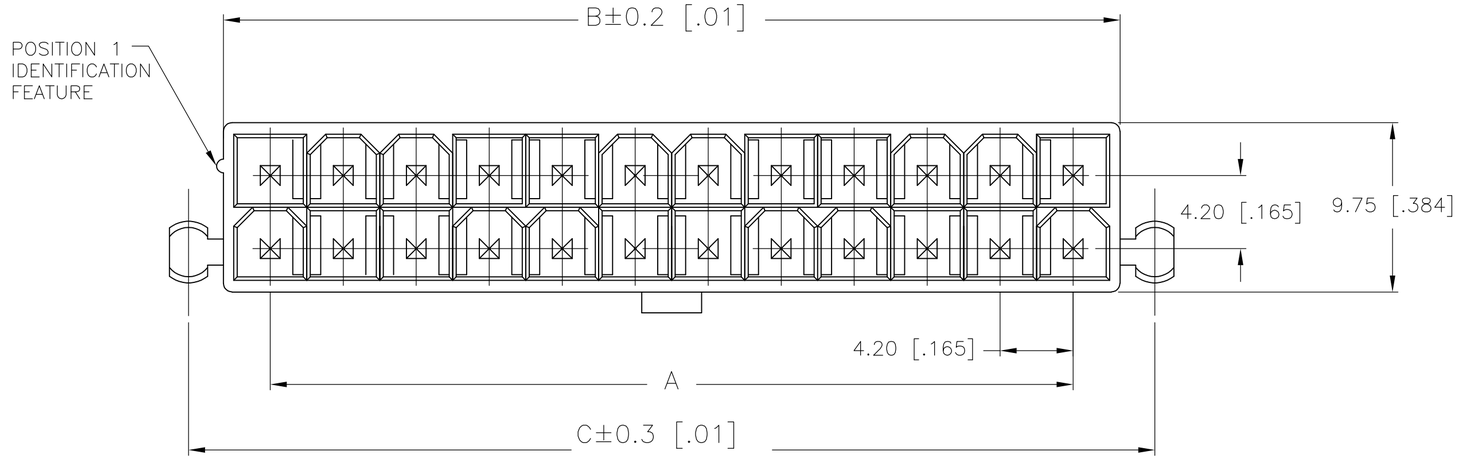

1 MATERIAL: HOUSING: NYLON 66 GF20, UL94V–0, NATURAL
CONTACTS: BRASS, TIN–PLATED

2 GLOW WIRE APPROVED, CONTACT TE CONNECTIVITY ENGINEERING FOR SPECIFICATION.

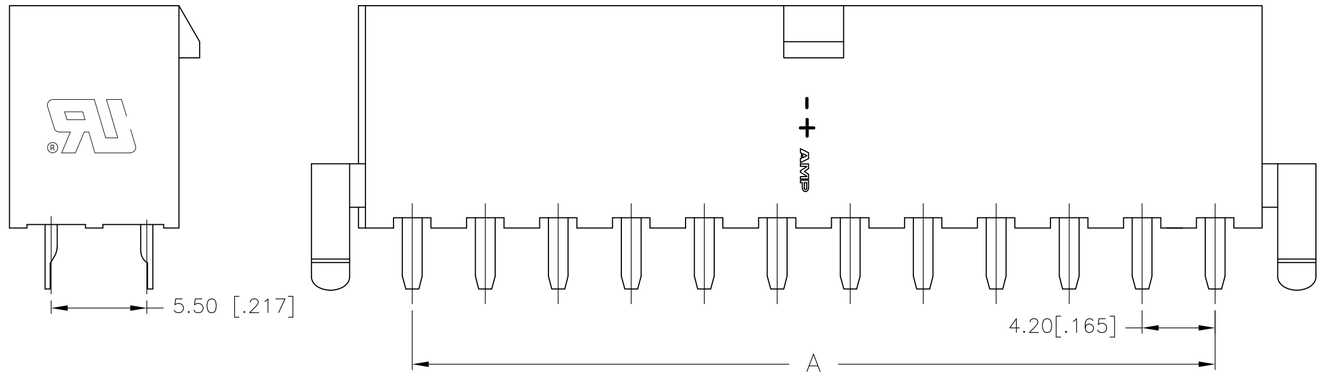

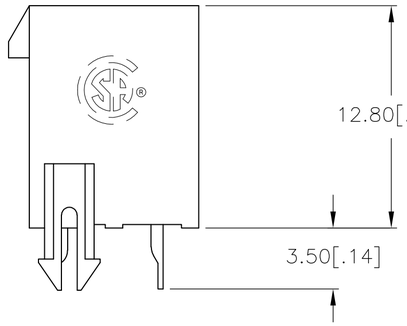

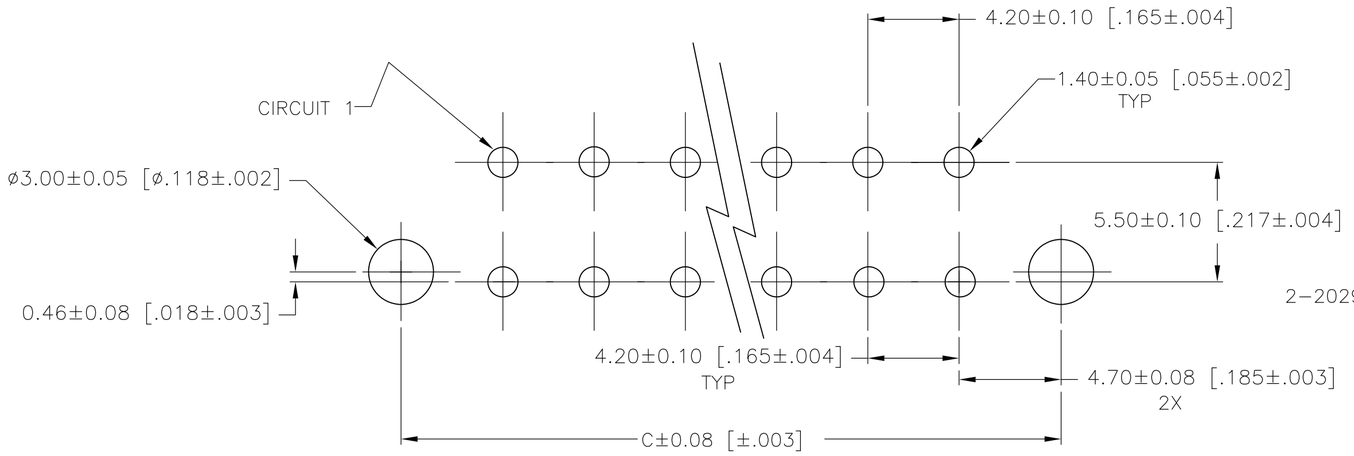

PCB LAYOUT: COMPONENT SIDE
RECOMMENDED BOARD THICKNESS 1.78 [.070]

POS	A	B±0.2[.01]	C±0.35[.01]	PART NUMBER
24	46.2±0.2 [1.82±.01]	51.60 [2.03]	55.60 [2.19]	2–2029059–4
22	42.0±0.2 [1.65±.01]	47.40 [1.87]	51.40 [2.02]	2–2029059–2
20	37.8±0.2 [1.49±.01]	43.20 [1.70]	47.20 [1.86]	2–2029059–0
18	33.6±0.2 [1.32±.01]	39.00 [1.54]	43.00 [1.69]	1–2029059–8
16	29.4±0.2 [1.16±.01]	34.80 [1.37]	38.80 [1.53]	1–2029059–6
14	25.2±0.2 [.99±.01]	30.60 [1.21]	34.60 [1.36]	1–2029059–4
12	21.0±0.2 [.83±.01]	26.40 [1.04]	30.40 [1.20]	1–2029059–2
10	16.8±0.1 [.66±.00]	22.20 [.87]	26.20 [1.03]	1–2029059–0
8	12.6±0.1 [.50±.00]	18.00 [.71]	22.00 [.87]	2029059–8
6	8.4±0.1 [.33±.00]	13.80 [.54]	17.80 [.70]	2029059–6
4	4.2±0.1 [.17±.00]	9.60 [.38]	13.60 [.54]	2029059–4
2		5.40 [.21]	9.40 [.37]	2029059–2

2–2029059–4 SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ± 0.5 [.02]
3 PLC ±
4 PLC ±
ANGLES ±

MATERIAL 1

FINISH 1

DWN K. WHITAKER 15JAN2008
CHK C. CASH 15JAN2008
APVD C. CASH 15JAN2008
PRODUCT SPEC 108–2112
APPLICATION SPEC 114–13172
WEIGHT

TE Connectivity

NAME
VERTICAL HEADER WITH PEGS,
WITH DRAIN HOLES
VAL–U–LOK(TM)

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C–2029059	–

CUSTOMER DRAWING | SCALE N/A | SHEET 1 OF 1 | REV D

2029059